


GENERAL FEATURES


$V_{(BR)DSS}$	-20V
$R_{DS(ON)}$	8.5mΩ
I_D	-14A

Application



- PWM Applications
- Load Switch

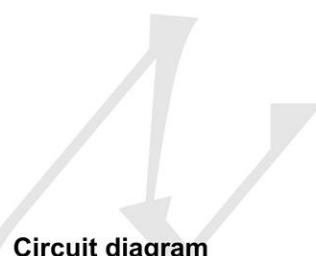


Package and Pin Configuration



SOP-8 top view

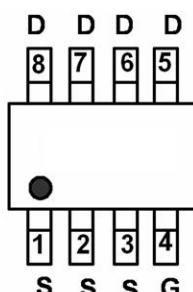

Marking:



Absolute Maximum Ratings ($T_c=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 12	V
Drain Current – Continuous ($T_c=25^\circ\text{C}$)	I_D	-14	A
Drain Current – Continuous ($T_c=100^\circ\text{C}$)		-8.8	A
Drain Current – Pulsed ¹	I_{DM}	-56	A
Power Dissipation ($T_c=25^\circ\text{C}$)	P_D	2	W
Power Dissipation – Derate above 25°C		0.016	W/ $^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$
Operating Junction Temperature Range	T_J	-55 to +150	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Typ.	Max.	Unit
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	---	62	$^\circ\text{C}/\text{W}$
Thermal Resistance Junction to Case	$R_{\theta JC}$	---	17	$^\circ\text{C}/\text{W}$

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=-250\mu\text{A}$	-20	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$		Reference to 25°C , $I_{\text{D}}=-1\text{mA}$	---	-0.01	---	$^\circ\text{C}$
Drain-Source Leakage Current	$I_{\text{DS}(\text{SS})}$	$V_{\text{DS}}=-20\text{V}, V_{\text{GS}}=0\text{V}, T_J=25^\circ\text{C}$	---	---	-1	μA
		$V_{\text{DS}}=-16\text{V}, V_{\text{GS}}=0\text{V}, T_J=125^\circ\text{C}$	---	---	-10	μA
Gate-Source Leakage Current	I_{GSS}	$V_{\text{GS}}=\pm 12\text{V}, V_{\text{DS}}=0\text{V}$	---	---	± 100	nA
On Characteristics						
Static Drain-Source On-Resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}}=-4.5\text{V}, I_{\text{D}}=-8\text{A}$	---	6.5	8.5	$\text{m}\Omega$
		$V_{\text{GS}}=-2.5\text{V}, I_{\text{D}}=-5\text{A}$	---	9	12	
		$V_{\text{GS}}=-1.8\text{V}, I_{\text{D}}=-3\text{A}$	---	12	17	
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}}=V_{\text{DS}}, I_{\text{D}}=-250\mu\text{A}$	-0.3	-0.6	-1	V
Forward Transconductance	g_{fs}	$V_{\text{DS}}=-10\text{V}, I_{\text{S}}=-5\text{A}$	---	20	---	S
Dynamic and Switching Characteristics						
Total Gate Charge ^{2, 3}	Q_g	$V_{\text{DS}}=-10\text{V}, V_{\text{GS}}=-4.5\text{V}, I_{\text{D}}=-5\text{A}$	---	44.4	80	nC
Gate-Source Charge ^{2, 3}	Q_{gs}		---	7.2	14	
Gate-Drain Charge ^{2, 3}	Q_{gd}		---	10.2	20	
Turn-On Delay Time ^{2, 3}	$T_{\text{d}(\text{on})}$	$V_{\text{DD}}=-10\text{V}, V_{\text{GS}}=-4.5\text{V}, R_{\text{G}}=25\Omega, I_{\text{D}}=-1\text{A}$	---	13.2	26	nS
Rise Time ^{2, 3}	T_r		---	68	120	
Turn-Off Delay Time ^{2, 3}	$T_{\text{d}(\text{off})}$		---	160	320	
Fall Time ^{2, 3}	T_f		---	154	300	
Input Capacitance	C_{iss}	$V_{\text{DS}}=-15\text{V}, V_{\text{GS}}=0\text{V}, F=1\text{MHz}$	---	4060	8000	pF
Output Capacitance	C_{oss}		---	520	1000	
Reverse Transfer Capacitance	C_{rss}		---	400	800	
Drain-Source Diode Characteristics and Maximum Ratings						
Continuous Source Current	I_s	$V_G=V_D=0\text{V}$, Force Current	---	---	-14	A
Pulsed Source Current	I_{SM}		---	---	-28	A
Diode Forward Voltage	V_{SD}	$V_{\text{GS}}=0\text{V}, I_{\text{S}}=-1\text{A}, T_J=25^\circ\text{C}$	---	---	-1	V

Note:

1. Repetitive Rating: Pulsed width limited by maximum junction temperature.
2. The data tested by pulsed, pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$.
3. Essentially independent of operating temperature.

Typical Electrical and Thermal Characteristic Curves

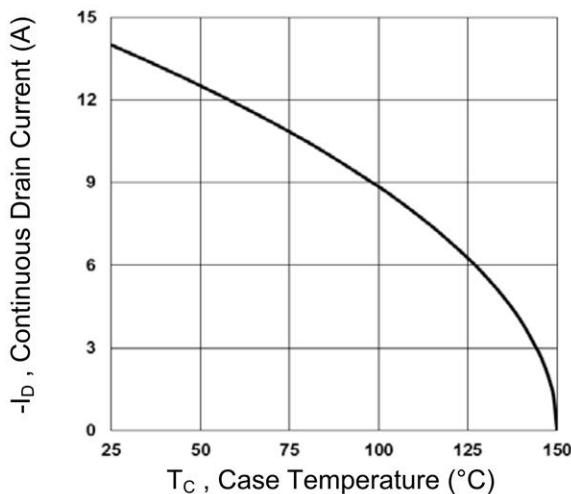


Fig.1 Continuous Drain Current vs. T_C

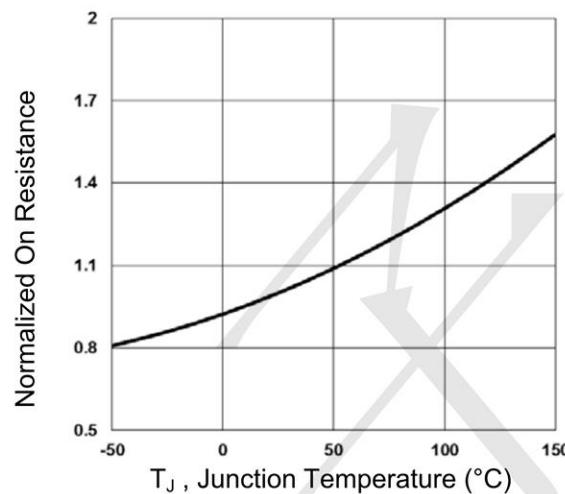


Fig.2 Normalized R_{DS(ON)} vs. T_J

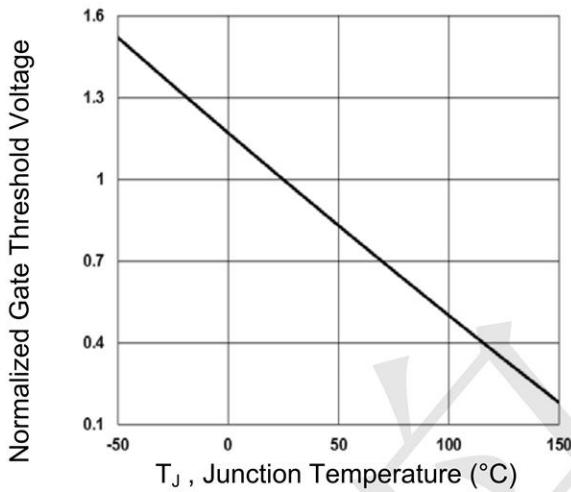


Fig.3 Normalized V_{th} vs. T_J

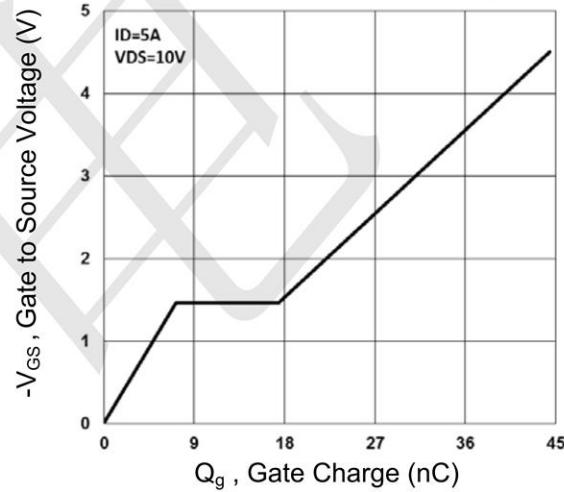


Fig.4 Gate Charge Waveform

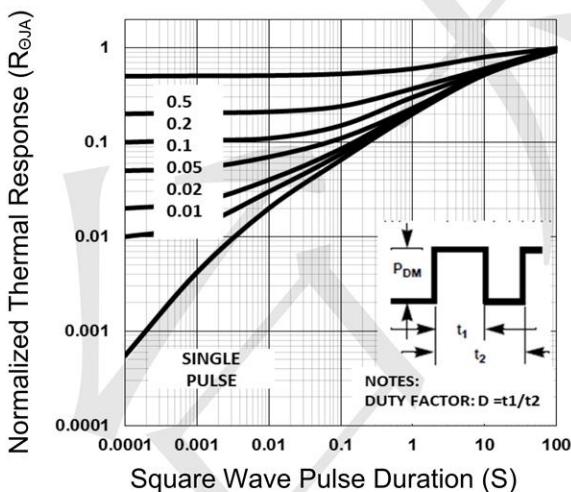


Fig.5 Normalized Transient Response




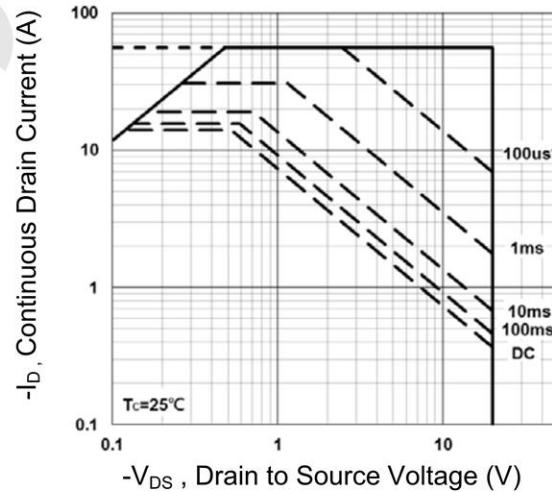


Fig.6 Maximum Safe Operation Area

Typical Electrical and Thermal Characteristic Curves**Fig.7** Switching Time Waveform**Fig.8** Gate Charge Waveform

SOP-8 Package Information

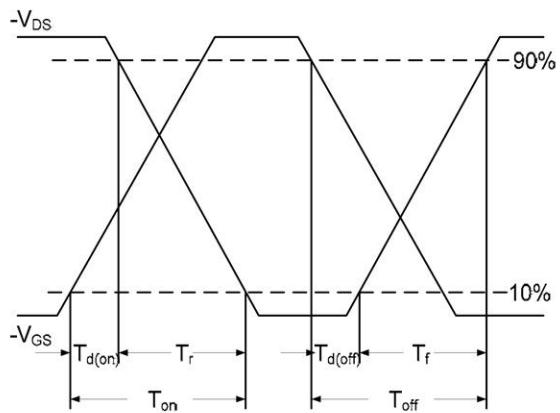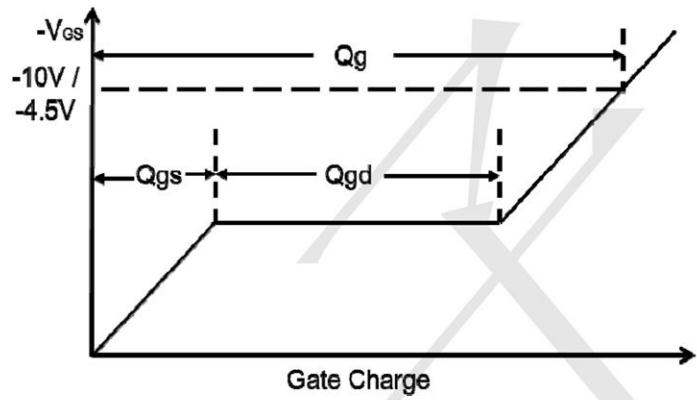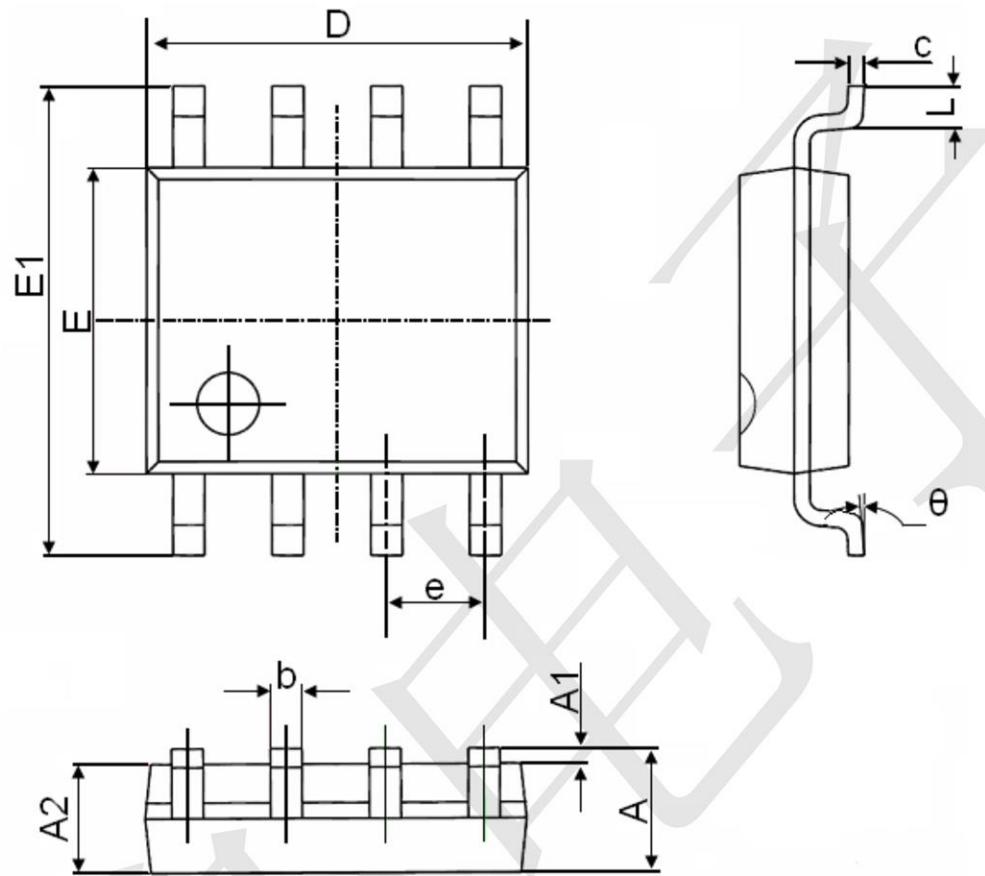

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°