

62783

LINEAR INTEGRATED CIRCUIT

8CH HIGH-VOLTAGE SOURCE DRIVER

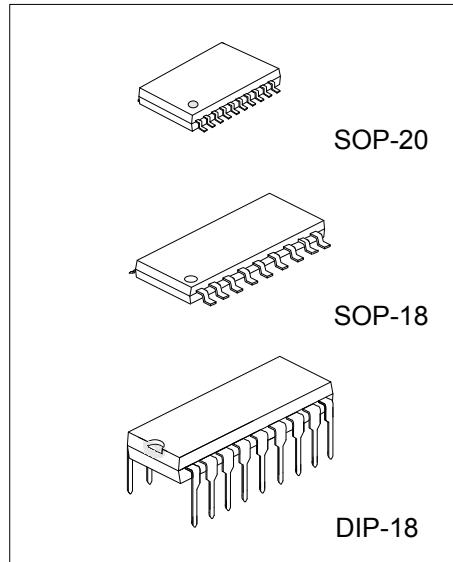
■ DESCRIPTION

The UTC **62783** consists of eight source current transistor array combination and it is suitable for fluorescent display applications.

The UTC **62783** is ideal for uses, such as relay, hammer and lamp drivers.

■ FEATURES

- *High output voltage: $V_{CC} = 50V$ (MIN.)
- * Output current (single output) $I_{OUT} = -500mA$ (MIN.)
- * Output clamp diodes and single supply voltage
- * Input compatible with various types of logic
- * TTL, 5V CMOS



■ ORDERING INFORMATION

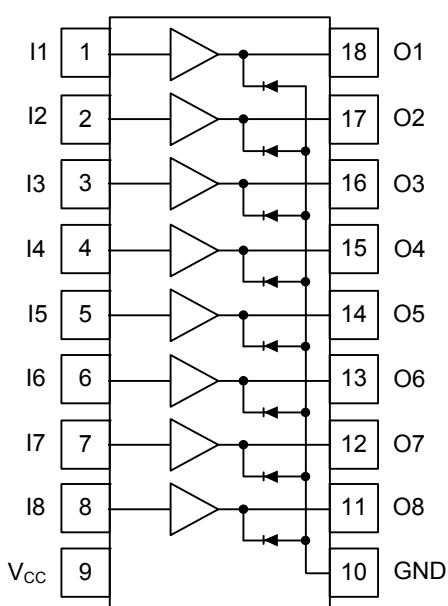
Ordering Number	Package	Packing
62783G-D18-T	DIP-18	Tube
62783G-S18-T	SOP-18	Tube
62783G-S18-R	SOP-18	Tape Reel
62783G-S20-T	SOP-20	Tube
62783G-S20-R	SOP-20	Tape Reel

62783G-D18-T 	(1) T: Tube, R: Tape Reel (2) D18: DIP-18, S18: SOP-18, S20: SOP-20 (3) G: Halogen Free and Lead Free
------------------	---

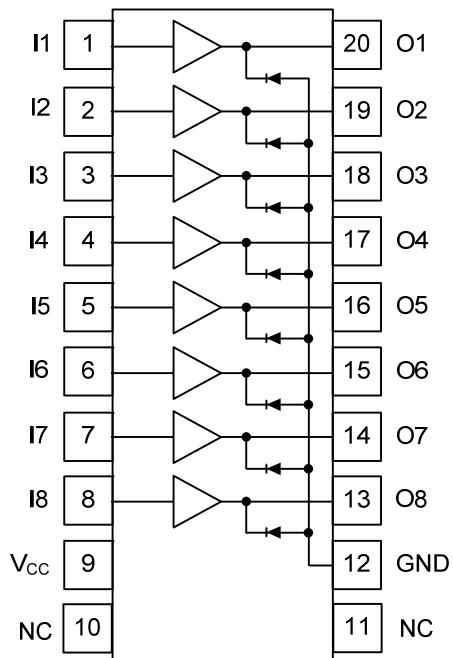
■ MARKING

Packing	MARKING
DIP-18	<p>UTC 62783G</p> <p>18 17 16 15 14 13 12 11 10 1 2 3 4 5 6 7 8 9</p> <p>Date Code</p> <p>Lot Code</p>
SOP-18	<p>UTC 62783G</p> <p>18 17 16 15 14 13 12 11 10 1 2 3 4 5 6 7 8 9</p> <p>Date Code</p> <p>Lot Code</p>
SOP-20	<p>UTC 62783G</p> <p>20 19 18 17 16 15 14 13 12 11 1 2 3 4 5 6 7 8 9 10</p> <p>Date Code</p> <p>Lot Code</p>

■ PIN CONFIGURATION



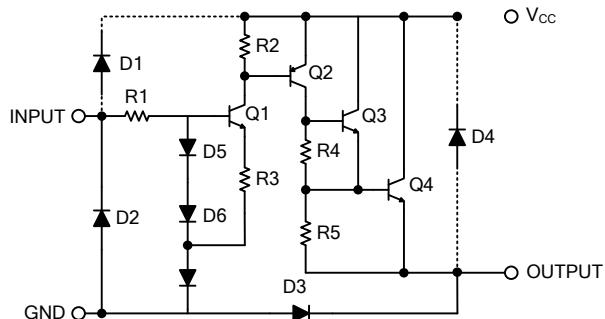
DIP-18/SOP-18



SOP-20

■ PIN DESCRIPTION

PIN NO.		PIN NAME	DESCRIPTION
DIP-18/ SOP-18	SOP-20		
1	1	I1	Input Of CH1
2	2	I2	Input Of CH2
3	3	I3	Input Of CH3
4	4	I4	Input Of CH4
5	5	I5	Input Of CH5
6	6	I6	Input Of CH6
7	7	I7	Input Of CH7
8	8	I8	Input Of CH8
9	9	V _{cc}	Power Supply
10	12	GND	Ground
11	13	O8	Output Of CH8
12	14	O7	Output Of CH7
13	15	O6	Output Of CH6
14	16	O5	Output Of CH5
15	17	O4	Output Of CH4
16	18	O3	Output Of CH3
17	19	O2	Output Of CH2
18	20	O1	Output Of CH1
-	10, 11	NC	Not connected

■ SCHEMATICS (EACH DRIVER)

R1	R2	R3	R4	R5
10kΩ	20kΩ	2.6kΩ	10kΩ	5kΩ

Note: The input and output parasitic diodes (D1 & D4) cannot be used as clamp diodes

■ ABSOLUTE MAXIMUM RATING ($T_A = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS		UNIT
Supply Voltage		V_{CC}	50		V
Input Voltage		V_{IN}	15		V
Clamp Diode Reverse Voltage		V_R	50		V
Output Current		I_{OUT}	-500		mA/ch
Clamp Diode Forward Current		I_F	500		mA
Power Dissipation	DIP-18	P_D	1470		mW
	SOP-18/SOP-20		960		
Derated Above 25°C			7.7		$\text{mW}/^\circ\text{C}$
Operating Temperature		T_{OPR}	-40~+85		$^\circ\text{C}$
Storage Temperature		T_{STG}	-55~+150		$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

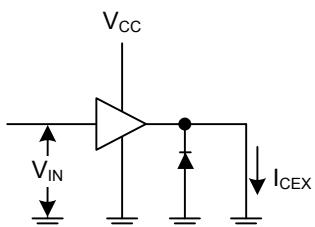
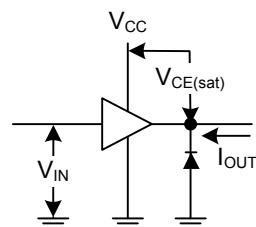

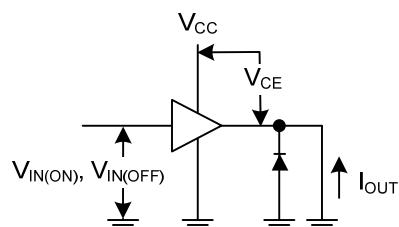
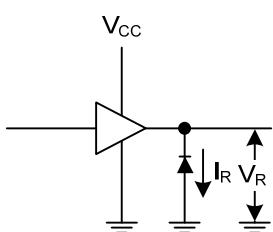
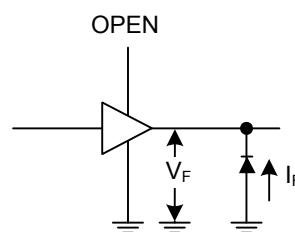
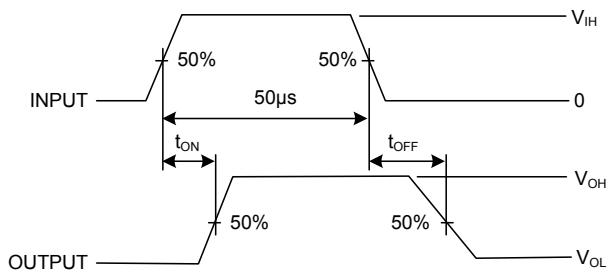
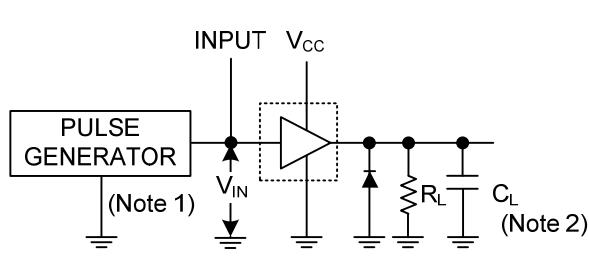
■ RECOMMENDED OPERATING CONDITIONS ($T_A = -40 \sim +80^\circ\text{C}$)

PARAMETER		SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Supply Voltage		V_{CC}					50	V
Output Current		I_{OUT}	$T_A=85^\circ\text{C}, T_J=120^\circ\text{C}, T_P=25\text{ms}$	Duty=10%			-180	mA/ch
				Duty=50%			-38	mA/ch
Input Voltage		V_{IN}					12	V
Input Voltage	Output On	$V_{IN(ON)}$			2.0	5.0	15	V
	Output Off	$V_{IN(OFF)}$			0		0.8	V
Clamp Diode Reverse Voltage		V_R					35	V
Clamp Diode Forward Current		I_F					400	mA
Power Dissipation	DIP-18	P_D					520	mW
	SOP-18 SOP-20						350	

■ ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

PARAMETER		SYMBOL	TEST CIRCUIT	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Leakage Current		I_{CEX}	1	$V_{CC} = V_{CC(\text{MAX})}, V_{IN} = 0.4\text{V}$				100	μA
Output Saturation Voltage		$V_{CE(\text{SAT})}$	2	$V_{IN} = V_{IN(ON)}, I_{OUT} = -350\text{mA}$			2.0		V
				$V_{IN} = V_{IN(ON)}, I_{OUT} = -225\text{mA}$			1.9		V
				$V_{IN} = V_{IN(ON)}, I_{OUT} = -100\text{mA}$			1.8		V
Input Current		$I_{IN(ON)}$	3	$V_{IN} = 2.4\text{V}$		36	52	μA	
				$V_{IN} = 3.85\text{V}$		180	260	μA	
Supply Current		$I_{CC(ON)}$	3	$V_{IN} = V_{IN(ON)}, V_{CC} = 50\text{ V}$			2.5	mA/ch	
Input Voltage	$V_{IN(ON)}$		4	$V_{CE} = 2.0\text{V}$			2.0		V
	$V_{IN(OFF)}$			$I_{OUT} = -500\text{ }\mu\text{A}$	0.8				V
Clamp Diode Reverse Current		I_R	5	$V_R = 50\text{V}$			50	μA	
Clamp Diode Forward Voltage		V_F	6	$I_F = 350\text{mA}$			2.0		V
Turn-On Delay		t_{ON}	7	$V_{CC} = V_{CC(\text{MAX})}, R_L = 125\Omega$		0.15		μs	
Turn-Off Delay		t_{OFF}		$C_L = 15\text{pF}, R_L = 88\Omega$		4.5		μs	

■ TEST CIRCUITS

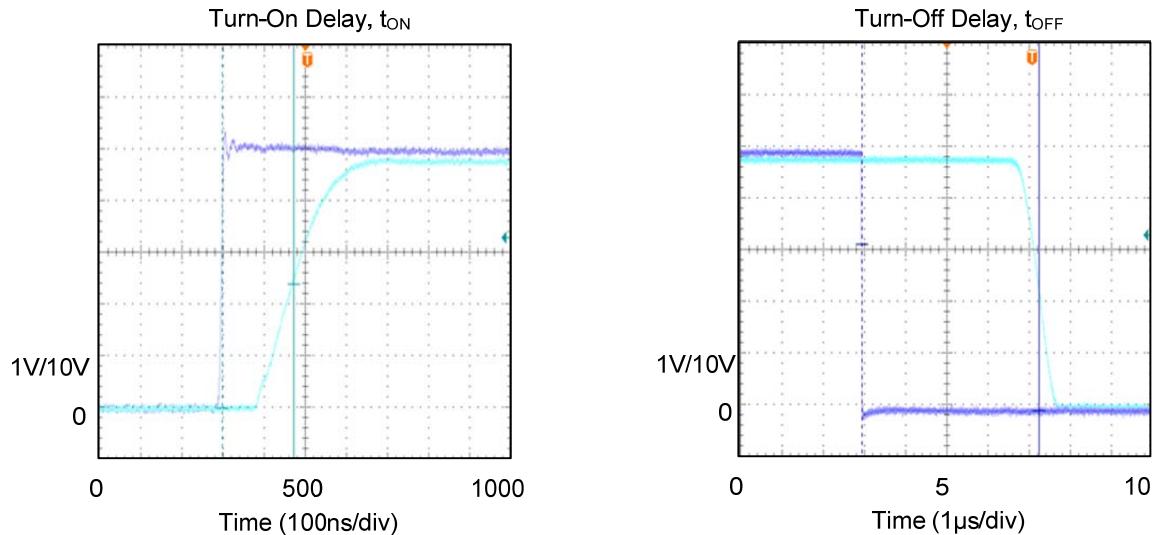
1. I_{CEX} 2. $V_{CE(SAT)}$ 3. $I_{IN(ON)}, I_{CC}$ 4. $V_{IN(ON)}, V_{IN(OFF)}$ 5. I_R 6. V_F 7. t_{ON}, t_{OFF} 

Notes: 1. Pulse width 50 μs, duty cycle 10% Output impedance 50 Ω, $t_R \leq 5\text{ns}$, $t_F \leq 10\text{ns}$
 2. C_L includes probe and jig capacitance

■ PRECAUTIONS FOR USING

This circuit does not integrate protection circuits such as over-current and overvoltage protectors.
 Thus, the IC may be damaged if excess current or voltage is occurred to the IC. Make sure the IC design is fine so that excess current or voltage will not be applied to the IC.

You must take extreme care to the design of the output line, V_{CC} and GND line because IC may be destroyed under the condition of short-circuit between outputs, air contamination fault, or fault by improper grounding.

■ TYPICAL CHARACTERISTICS

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.