

## Automotive P-Channel 20 V (D-S) 175 °C MOSFET

 AUTOMOTIVE  
GRADE


**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**

### PRODUCT SUMMARY


$V_{DS}$ (V)	- 20
$R_{DS(on)}$ ( $\Omega$ ) at $V_{GS} = -4.5$ V	0.115
$R_{DS(on)}$ ( $\Omega$ ) at $V_{GS} = -2.5$ V	0.205
$I_D$ (A)	- 3.2
Configuration	Single

### FEATURES

- TrenchFET® Power MOSFET
- AEC-Q101 Qualified<sup>d</sup>
- 100 %  $R_g$  and UIS Tested
- Material categorization:  
For definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)


 Top View  
SQ2351ES

Marking Code: 8Sxxx



P-Channel MOSFET

### ORDERING INFORMATION

Package	SOT-23
Lead (Pb)-free and Halogen-free	SQ2351ES-T1-GE3

### ABSOLUTE MAXIMUM RATINGS ( $T_C = 25$ °C, unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNIT
Drain-Source Voltage	$V_{DS}$	- 20	V
Gate-Source Voltage	$V_{GS}$	$\pm 12$	
Continuous Drain Current	$I_D$	$T_C = 25$ °C	- 3.2
		$T_C = 125$ °C	- 1.8
Continuous Source Current (Diode Conduction) <sup>a</sup>	$I_S$	- 2.5	A
Pulsed Drain Current <sup>b</sup>	$I_{DM}$	- 12.7	
Single Pulse Avalanche Current	$I_{AS}$	- 6	
Single Pulse Avalanche Energy	$E_{AS}$	1.8	mJ
Maximum Power Dissipation <sup>b</sup>	$P_D$	$T_C = 25$ °C	2
		$T_C = 125$ °C	0.67
Operating Junction and Storage Temperature Range	$T_J, T_{stg}$	- 55 to + 175	°C

### THERMAL RESISTANCE RATINGS

PARAMETER	SYMBOL	LIMIT	UNIT
Junction-to-Ambient	$R_{thJA}$	175	°C/W
Junction-to-Foot (Drain)	$R_{thJF}$	75	

#### Notes

- Package limited.
- Pulse test; pulse width  $\leq 300$   $\mu$ s, duty cycle  $\leq 2$  %.
- When mounted on 1" square PCB (FR-4 material).
- Parametric verification ongoing.



SPECIFICATIONS (T <sub>C</sub> = 25 °C, unless otherwise noted)						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
<b>Static</b>						
Drain-Source Breakdown Voltage	V <sub>DS</sub>	V <sub>GS</sub> = 0, I <sub>D</sub> = - 250 μA	- 20	-	-	V
Gate-Source Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = - 250 μA	- 0.6	- 1.0	- 1.5	
Gate-Source Leakage	I <sub>GSS</sub>	V <sub>DS</sub> = 0 V, V <sub>GS</sub> = ± 12 V	-	-	± 100	nA
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = - 20 V	-	-	- 1	μA
		V <sub>GS</sub> = 0 V, V <sub>DS</sub> = - 20 V, T <sub>J</sub> = 125 °C	-	-	- 50	
		V <sub>GS</sub> = 0 V, V <sub>DS</sub> = - 20 V, T <sub>J</sub> = 175 °C	-	-	- 150	
On-State Drain Current <sup>a</sup>	I <sub>D(on)</sub>	V <sub>GS</sub> = - 4.5 V, V <sub>DS</sub> ≥ 5 V	- 8	-	-	A
Drain-Source On-State Resistance <sup>a</sup>	R <sub>DS(on)</sub>	V <sub>GS</sub> = - 4.5 V, I <sub>D</sub> = - 2.4 A	-	0.080	0.115	Ω
		V <sub>GS</sub> = - 4.5 V, I <sub>D</sub> = - 2.4 A, T <sub>J</sub> = 125 °C	-	-	0.168	
		V <sub>GS</sub> = - 4.5 V, I <sub>D</sub> = - 2.4 A, T <sub>J</sub> = 175 °C	-	-	0.196	
		V <sub>GS</sub> = - 2.5 V, I <sub>D</sub> = - 1.8 A	-	0.150	0.205	
Forward Transconductance <sup>b</sup>	g <sub>fs</sub>	V <sub>DS</sub> = - 10 V, I <sub>D</sub> = - 2.4 A	-	6	-	S
<b>Dynamic<sup>b</sup></b>						
Input Capacitance	C <sub>iss</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = - 10 V, f = 1 MHz	-	265	330	pF
Output Capacitance	C <sub>oss</sub>		-	75	94	
Reverse Transfer Capacitance	C <sub>rss</sub>		-	50	63	
Total Gate Charge <sup>c</sup>	Q <sub>g</sub>	V <sub>GS</sub> = - 4.5 V, V <sub>DS</sub> = - 10 V, I <sub>D</sub> = - 2.4 A	-	3.4	5.5	nC
Gate-Source Charge <sup>c</sup>	Q <sub>gs</sub>		-	0.6	-	
Gate-Drain Charge <sup>c</sup>	Q <sub>gd</sub>		-	1.1	-	
Gate Resistance	R <sub>g</sub>	f = 1 MHz	4.8	9.6	14.4	Ω
Turn-On Delay Time <sup>c</sup>	t <sub>d(on)</sub>	V <sub>DD</sub> = - 10 V, R <sub>L</sub> = 5.21 Ω I <sub>D</sub> ≅ - 1.9 A, V <sub>GEN</sub> = - 4.5 V, R <sub>g</sub> = 1 Ω	-	20	30	ns
Rise Time <sup>c</sup>	t <sub>r</sub>		-	18	27	
Turn-Off Delay Time <sup>c</sup>	t <sub>d(off)</sub>		-	19	28	
Fall Time <sup>c</sup>	t <sub>f</sub>		-	8	12	
<b>Source-Drain Diode Ratings and Characteristics<sup>b</sup></b>						
Pulsed Current <sup>a</sup>	I <sub>SM</sub>		-	-	- 12.7	A
Forward Voltage	V <sub>SD</sub>	I <sub>F</sub> = - 2 A, V <sub>GS</sub> = 0	-	- 0.8	- 1.2	V


**Notes**

- Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2 %.
- Guaranteed by design, not subject to production testing.
- Independent of operating temperature.


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.




TYPICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C, unless otherwise noted)

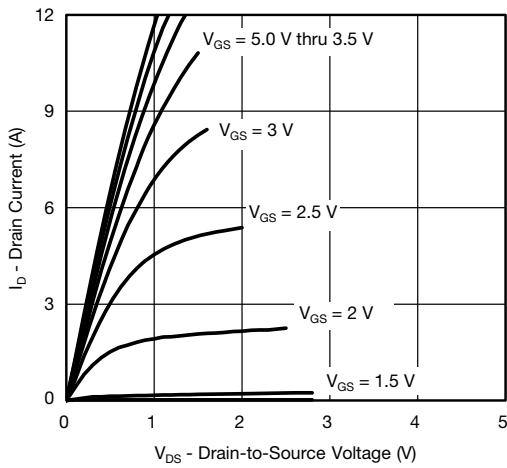


Output Characteristics

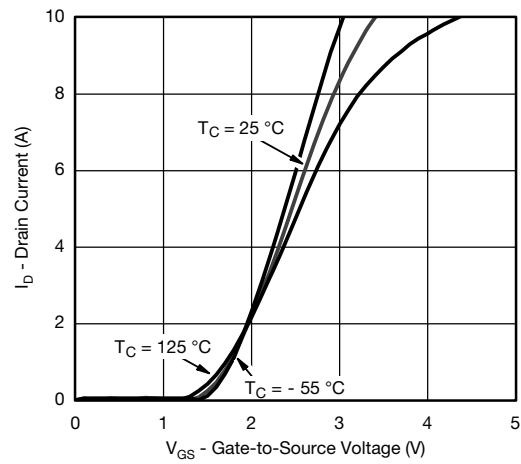


Transfer Characteristics

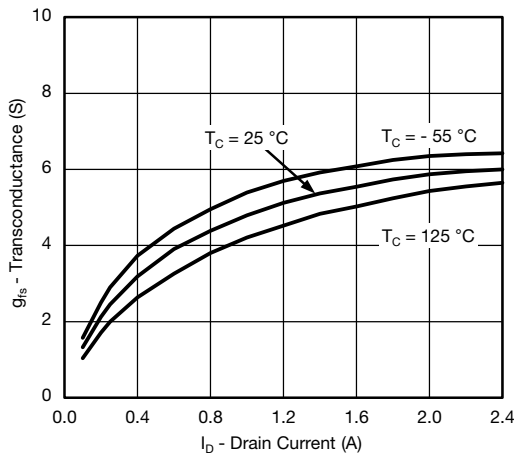


Transconductance

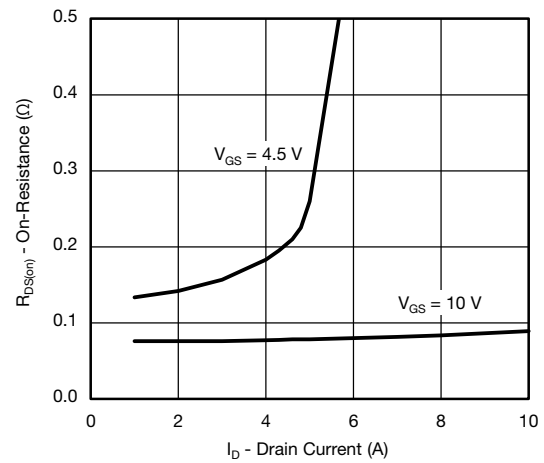

On-Resistance vs. Drain Current

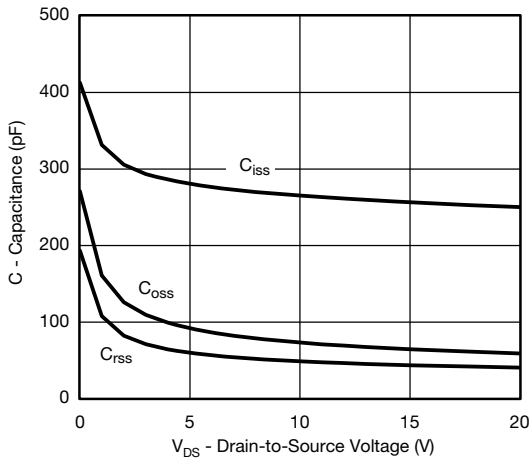


Capacitance

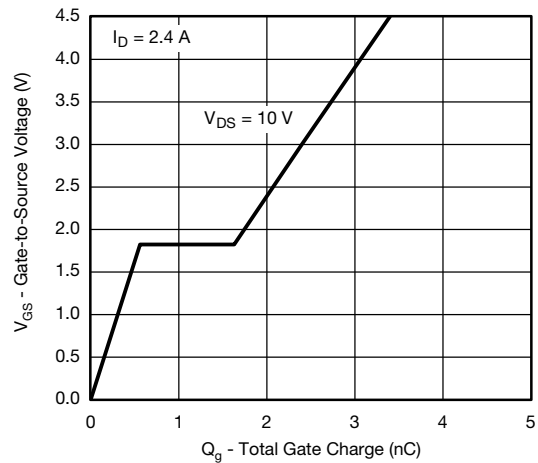


Gate Charge


**TYPICAL CHARACTERISTICS** ( $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise noted)

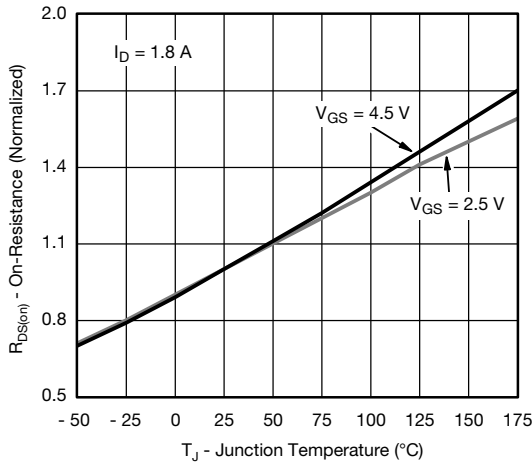


**On-Resistance vs. Junction Temperature**

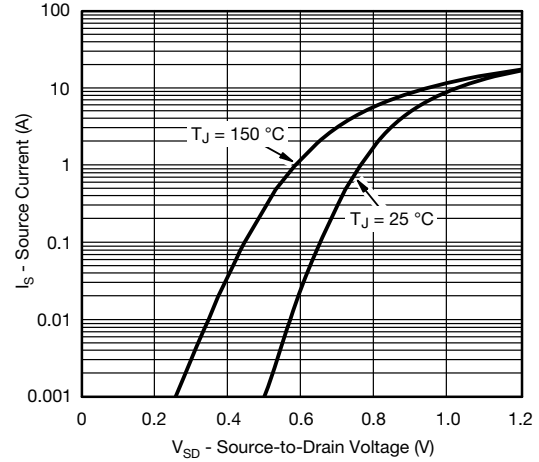


**Source-Drain Diode Forward Voltage**

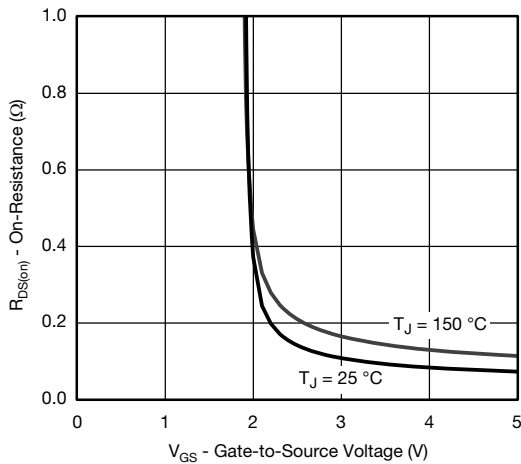

**On-Resistance vs. Gate-to-Source Voltage**

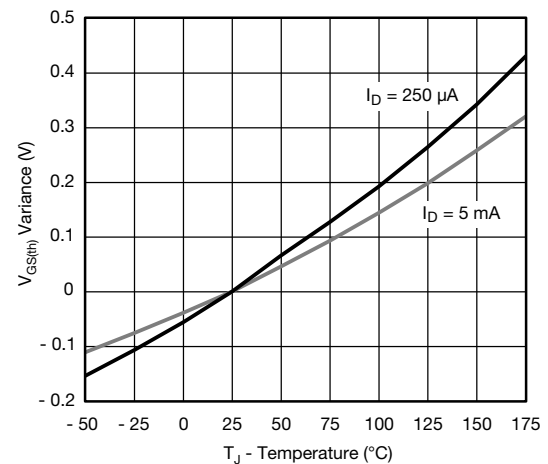


**Threshold Voltage**

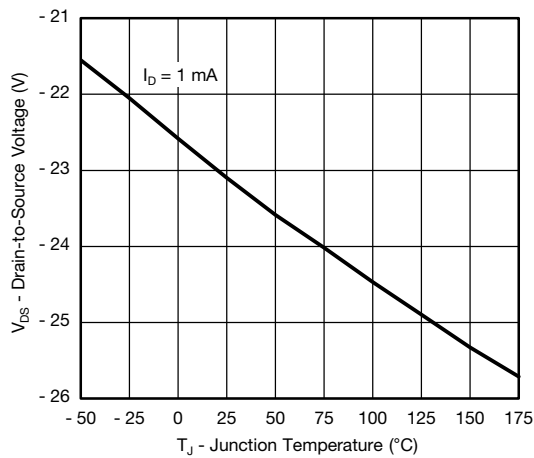


**Drain Source Breakdown vs. Junction Temperature**



**THERMAL RATINGS** ( $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise noted)

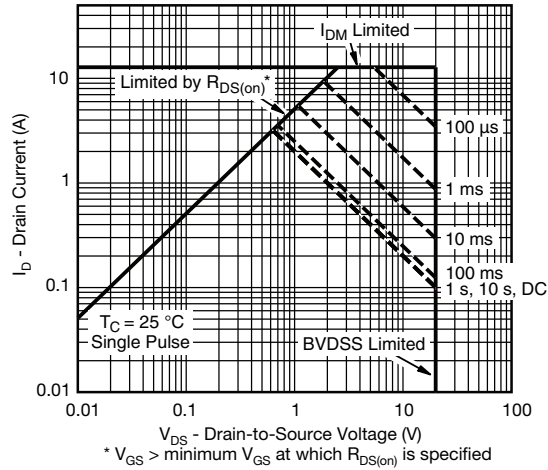


**Safe Operating Area**

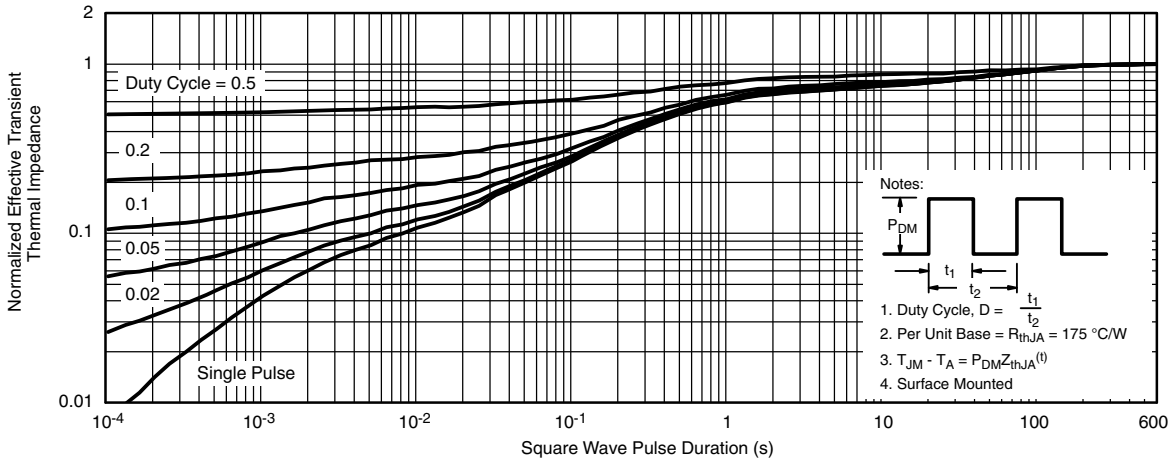

**Normalized Thermal Transient Impedance, Junction-to-Ambient**



**THERMAL RATINGS** ( $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise noted)

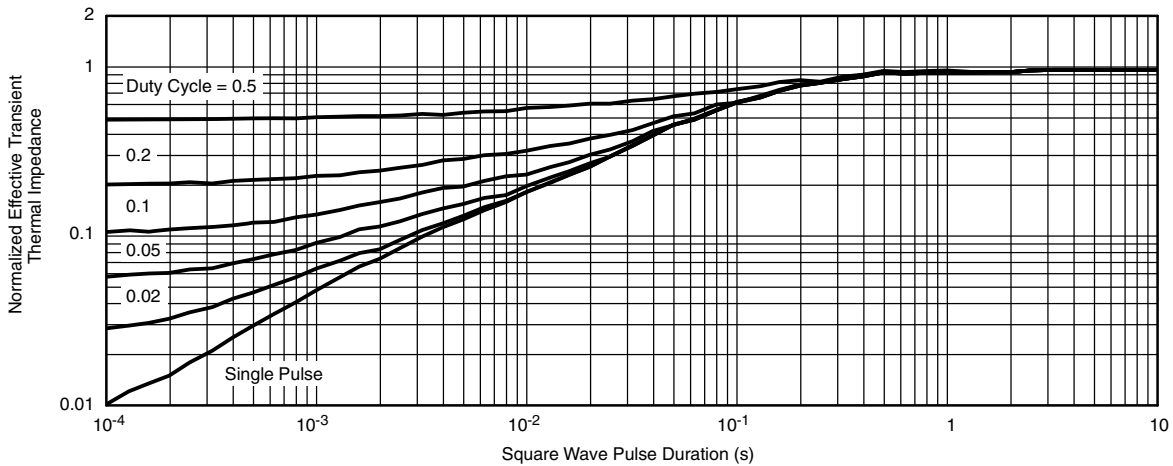

**Normalized Thermal Transient Impedance, Junction-to-Foot**

**Note**

- The characteristics shown in the two graphs
  - Normalized Transient Thermal Impedance Junction-to-Ambient ( $25\text{ }^\circ\text{C}$ )
  - Normalized Transient Thermal Impedance Junction-to-Foot ( $25\text{ }^\circ\text{C}$ )
 are given for general guidelines only to enable the user to get a “ball park” indication of part capabilities. The data are extracted from single pulse transient thermal impedance characteristics which are developed from empirical measurements. The latter is valid for the part mounted on printed circuit board - FR4, size 1" x 1" x 0.062", double sided with 2 oz. copper, 100 % on both sides. The part capabilities can widely vary depending on actual application parameters and operating conditions.

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see [www.vishay.com/ppg?66716](http://www.vishay.com/ppg?66716).



## SOT-23


Ordering codes for the SQ rugged series power MOSFETs in the SOT-23 package:

DATASHEET PART NUMBER	OLD ORDERING CODE <sup>a</sup>	NEW ORDERING CODE
SQ2301ES	SQ2301ES-T1-GE3	<b>SQ2301ES-T1_GE3</b>
SQ2303ES	SQ2303ES-T1-GE3	<b>SQ2303ES-T1_GE3</b>
SQ2308CES	SQ2308CES-T1-GE3	<b>SQ2308CES-T1_GE3</b>
SQ2309ES	SQ2309ES-T1-GE3	<b>SQ2309ES-T1_GE3</b>
SQ2310ES	SQ2310ES-T1-GE3	<b>SQ2310ES-T1_GE3</b>
SQ2315ES	SQ2315ES-T1-GE3	<b>SQ2315ES-T1_GE3</b>
SQ2318AES	SQ2318AES-T1-GE3	<b>SQ2318AES-T1_GE3</b>
SQ2319ADS	-	<b>SQ2319ADS-T1_GE3</b>
SQ2325ES	SQ2325ES-T1-GE3	<b>SQ2325ES-T1_GE3</b>
SQ2337ES	SQ2337ES-T1-GE3	<b>SQ2337ES-T1_GE3</b>
SQ2348ES	SQ2348ES-T1-GE3	<b>SQ2348ES-T1_GE3</b>
SQ2351ES	SQ2351ES-T1-GE3	<b>SQ2351ES-T1_GE3</b>
SQ2361AEES	SQ2361AEES-T1-GE3	<b>SQ2361AEES-T1_GE3</b>
SQ2361ES	-	<b>SQ2361ES-T1_GE3</b>
SQ2362ES	-	<b>SQ2362ES-T1_GE3</b>
SQ2389ES	-	<b>SQ2389ES-T1_GE3</b>
SQ2398ES	-	<b>SQ2398ES-T1_GE3</b>

**Note**

a. Old ordering code is obsolete and no longer valid for new orders

## SOT-23 (TO-236): 3-LEAD

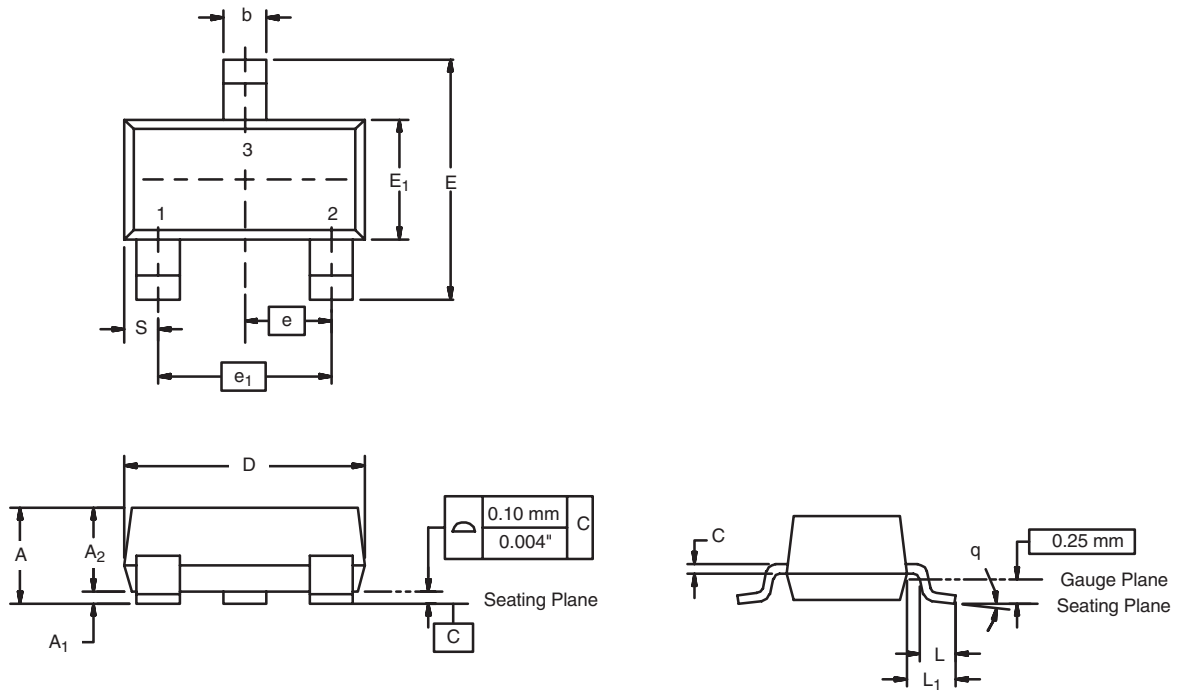

Dim	MILLIMETERS		INCHES	
	Min	Max	Min	Max
A	0.89	1.12	0.035	0.044
A <sub>1</sub>	0.01	0.10	0.0004	0.004
A <sub>2</sub>	0.88	1.02	0.0346	0.040
b	0.35	0.50	0.014	0.020
c	0.085	0.18	0.003	0.007
D	2.80	3.04	0.110	0.120
E	2.10	2.64	0.083	0.104
E <sub>1</sub>	1.20	1.40	0.047	0.055
e	0.95 BSC		0.0374 Ref	
e <sub>1</sub>	1.90 BSC		0.0748 Ref	
L	0.40	0.60	0.016	0.024
L <sub>1</sub>	0.64 Ref		0.025 Ref	
S	0.50 Ref		0.020 Ref	
q	3°	8°	3°	8°

ECN: S-03946-Rev. K, 09-Jul-01  
 DWG: 5479



## Mounting LITTLE FOOT<sup>®</sup> SOT-23 Power MOSFETs

Wharton McDaniel


Surface-mounted LITTLE FOOT power MOSFETs use integrated circuit and small-signal packages which have been modified to provide the heat transfer capabilities required by power devices. Leadframe materials and design, molding compounds, and die attach materials have been changed, while the footprint of the packages remains the same.

See Application Note 826, *Recommended Minimum Pad Patterns With Outline Drawing Access for Vishay Siliconix MOSFETs*, (<http://www.vishay.com/doc?72286>), for the basis of the pad design for a LITTLE FOOT SOT-23 power MOSFET footprint. In converting this footprint to the pad set for a power device, designers must make two connections: an electrical connection and a thermal connection, to draw heat away from the package.

The electrical connections for the SOT-23 are very simple. Pin 1 is the gate, pin 2 is the source, and pin 3 is the drain. As in the other LITTLE FOOT packages, the drain pin serves the additional function of providing the thermal connection from the package to the PC board. The total cross section of a copper trace connected to the drain may be adequate to carry the current required for the application, but it may be inadequate thermally. Also, heat spreads in a circular fashion from the heat source. In this case the drain pin is the heat source when looking at heat spread on the PC board.

Figure 1 shows the footprint with copper spreading for the SOT-23 package. This pattern shows the starting point for utilizing the board area available for the heat spreading copper. To create this pattern, a plane of copper overlies the drain pin and provides planar copper to draw heat from the drain lead and start the process of spreading the heat so it can be dissipated into the

ambient air. This pattern uses all the available area underneath the body for this purpose.

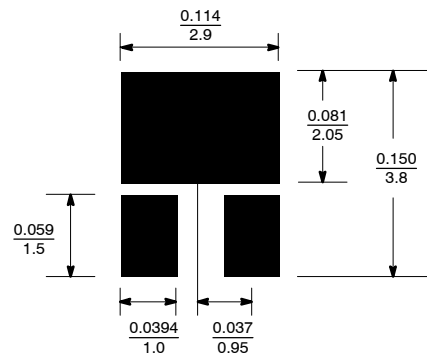

**FIGURE 1.** Footprint With Copper Spreading

Since surface-mounted packages are small, and reflow soldering is the most common way in which these are affixed to the PC board, “thermal” connections from the planar copper to the pads have not been used. Even if additional planar copper area is used, there should be no problems in the soldering process. The actual solder connections are defined by the solder mask openings. By combining the basic footprint with the copper plane on the drain pins, the solder mask generation occurs automatically.

A final item to keep in mind is the width of the power traces. The absolute minimum power trace width must be determined by the amount of current it has to carry. For thermal reasons, this minimum width should be at least 0.020 inches. The use of wide traces connected to the drain plane provides a low-impedance path for heat to move away from the device.



## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

[SQ2351ES-T1-GE3](#) [SQ2351ES-T1\\_GE3](#)