



东莞市耀博电子有限公司

DONG GUAN YAOBO ELECTRONICS CO., LTD

规格书



STYLE品名	PVC INSULATED 105° C 300V HOOK UP WIRE	DATE 日期	2011-8-19
SIZE 规格	UL2651 28AWG 7/0.127TS CONDUTOR	REV 版本	A0
ITEM 类型	HF-XXP-28#-7/0.127TS-1.27		

STANDARD 标准: UL758 UL1581 C22.2
 APPLICATION 用途: INTERNAL WIRING OF APPLIANCES AND ELECTRONIC EQUIPMENT
 CONSTRUCTION 加工:

CONDUCTOR导体	SIZE 规格	28AWG			
	CONSTRUCTION 结构	7/0.127 ± 0.005mmTS			
	MATERIAL 材质	TINNED COPPER CONDUCTOR			
	CONDUCTOR DIAMETER 导体直径	0.381mm			
INSULATION绝缘	MINIMUM THICKNESS 最小厚度	0.21mm			
	AVERAGE THICKNESS 平均厚度	0.26mm			
	COLOR 颜色	UL2651棕红橙黄绿蓝紫灰白黑 FLAT CABLE			
JACKET外被	DIAMETER 外径	0.9 ± 0.1			
	MATERIAL 材质	105° C PVC			
	PITCH 间距	1.27 ± 0.15mm			
	MARKING 印字	无			
ELECTRIC电气 FUNCTION功能	RATE VOLTAGE 额定电压	300V			
	VOLTAGE-WITHSTAND 耐电压	2500V			
	COND. RESISTANCE 导体电阻	MAX: 237Ω/KM 20° C			
	INSU. RESISTANCE 绝缘电阻	MAX: 100MΩ/KM 20° C			
	TENSILE STRENGTH 抗张强度	老化前	1500PSI	老化后	1290 PSI (85%)
	ELONGATION 伸长率	老化前	100%	老化后	75% (65%)

FLAT /WIRE CABLE排线电线:

UNIT单位: mm

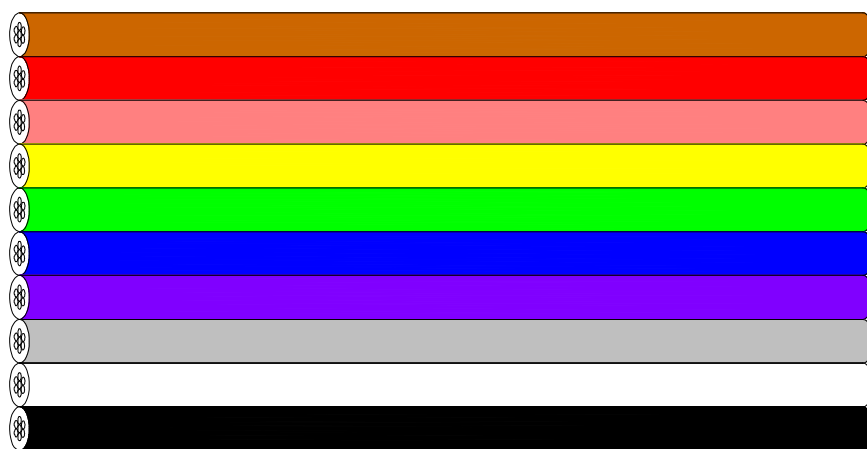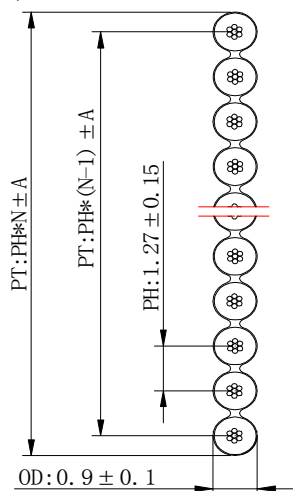

$N \leq 30 \quad A = \pm 0.3$

$N \geq 31 \quad A = \pm 0.4$

制作:	王绍富	审核:		核准:	
-----	-----	-----	--	-----	--