

DG55 300V 25A 10Pitch

材质及规格处理

塑件: PA66 UL 94V-0
端子: 黄铜, 0.8厚 镀锡
螺丝: 钢, M4 镀锌

性能

额定电压/电流: 300V/25A
使用温度: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
耐电压: AC2000V/Min
绝缘阻抗: $500\text{M}\Omega/\text{DC500V}$
适用线径: 22 ~ 12AWG
最大锁紧扭力: 10kg/cm



Materials

Housing: PA66, UL94V-0
Terminal: Brass, 0.8t, Tin-Plated
Screw: Steel, M4 Ni-Plated



Capability

Rated: 300V/25A
Temp. Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Withstand Voltage: AC2000V/Min
Insulation Resistance: $500\text{M}\Omega/\text{DC500V}$
Wire Range: 22 ~ 12AWG
Max. Torque Value: 10kg/cm



订货方式 HOW TO ORDER

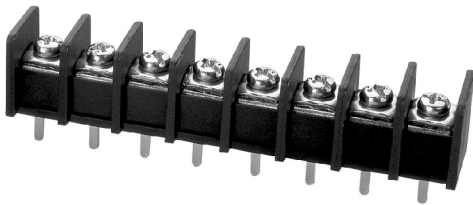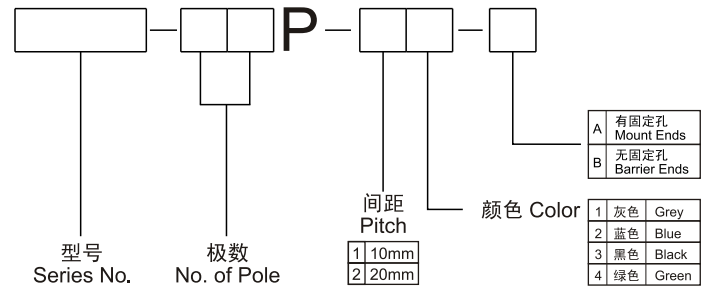



DG55C

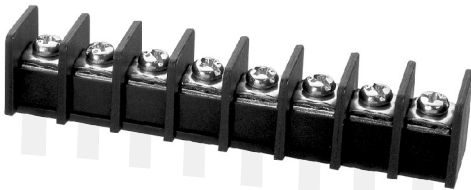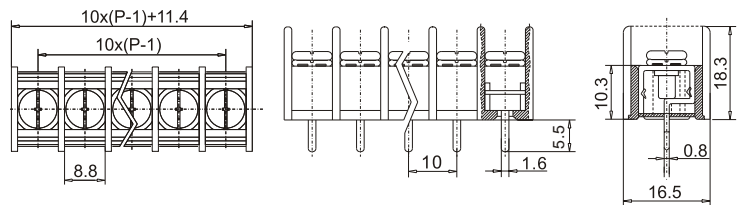

DG55S

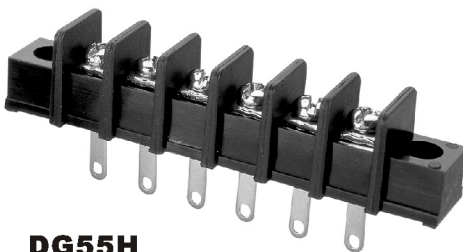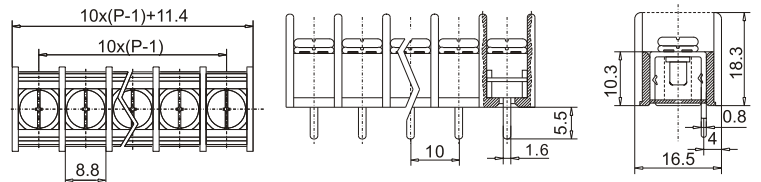

DG55H

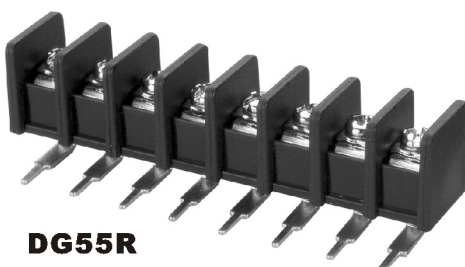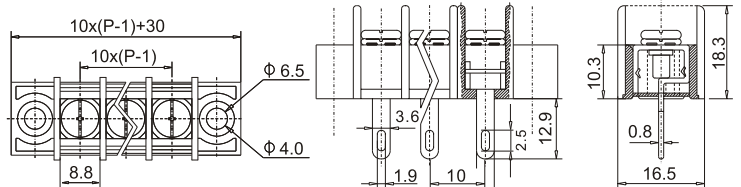

DG55R

