

ITS4300S-SJ-D

Smart High-Side NMOS-Power Switch

Data Sheet

Rev 1.0, 2012-09-01

Standard Power



1 Overview

Features

- CMOS compatible input
- Switching all types of resistive, inductive and capacitive loads
- Fast demagnetization of inductive loads
- Very low standby current
- Optimized Electromagnetic Compatibility (EMC)
- Open drain diagnostic output for overtemperature and short circuit
- Open load detection in OFF-state with external resistor
- Overload protection
- Current limitation
- Short circuit protection
- Thermal shutdown with restart
- Overvoltage protection (including load dump)
- Reverse battery protection with external resistor
- Loss of GND and loss of V_{bb} protection
- Electrostatic Discharge Protection (ESD)
- Green Product (RoHS compliant)

ITS4300S-SJ-D is not qualified and manufactured according to the requirements of Infineon Technologies with regards to automotive and/or transportation applications.

Description


The ITS4300S-SJ-D is a protected single channel Smart High-Side NMOS-Power Switch in a PG-DSO-8 package with charge pump, CMOS compatible input and diagnostic feedback.

Product Summary

Overvoltage protection $V_{SAZmin} = 41V$
 Operating voltage range: $5V < V_S < 34V$
 On-state resistance $R_{DSON} = \text{typ } 300m\Omega$
 Nominal load current $I_{LNOM} = 0.4A$
 Operating Temperature range: $T_j = -40^\circ C$ to $125^\circ C$
 Standby Current: $I_{SSTB} = 26\mu A$

Application

- All types of resistive, inductive and capacitive loads
- Power switch for 12V and 24V DC applications with CMOS compatible control interface
- Driver for electromagnetic relays
- Power management for high-side-switching with low current consumption in OFF-mode

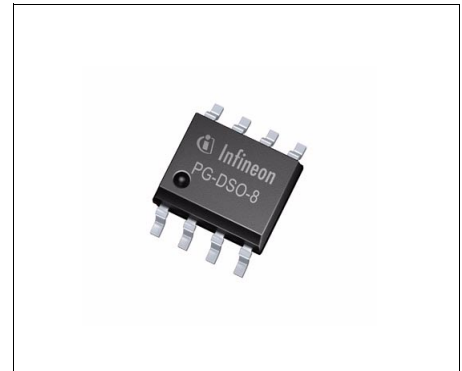

PG-DSO-8

| Type | Package | Marking |
|---------------|----------|---------|
| ITS4300S-SJ-D | PG-DSO-8 | I300SD |

2 Block Diagram and Terms

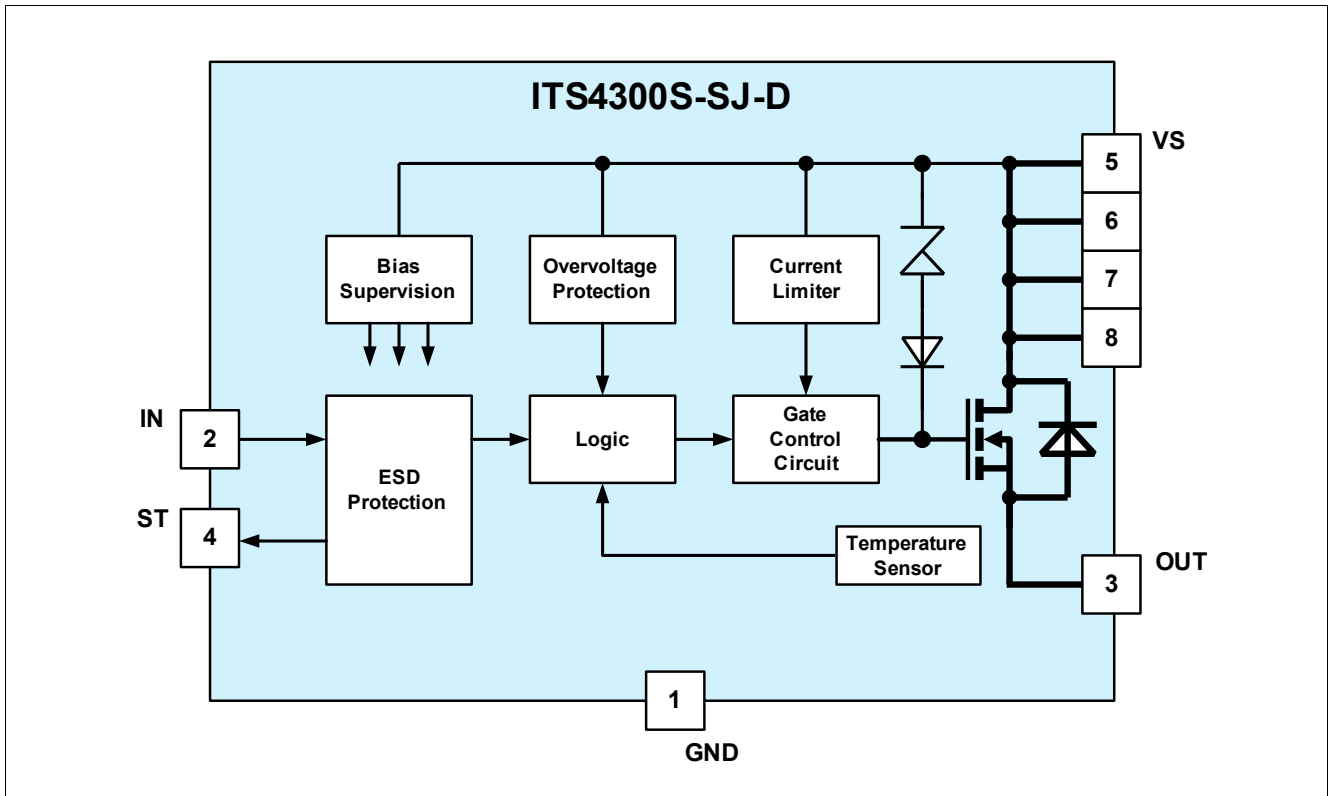


Figure 1 Block diagram

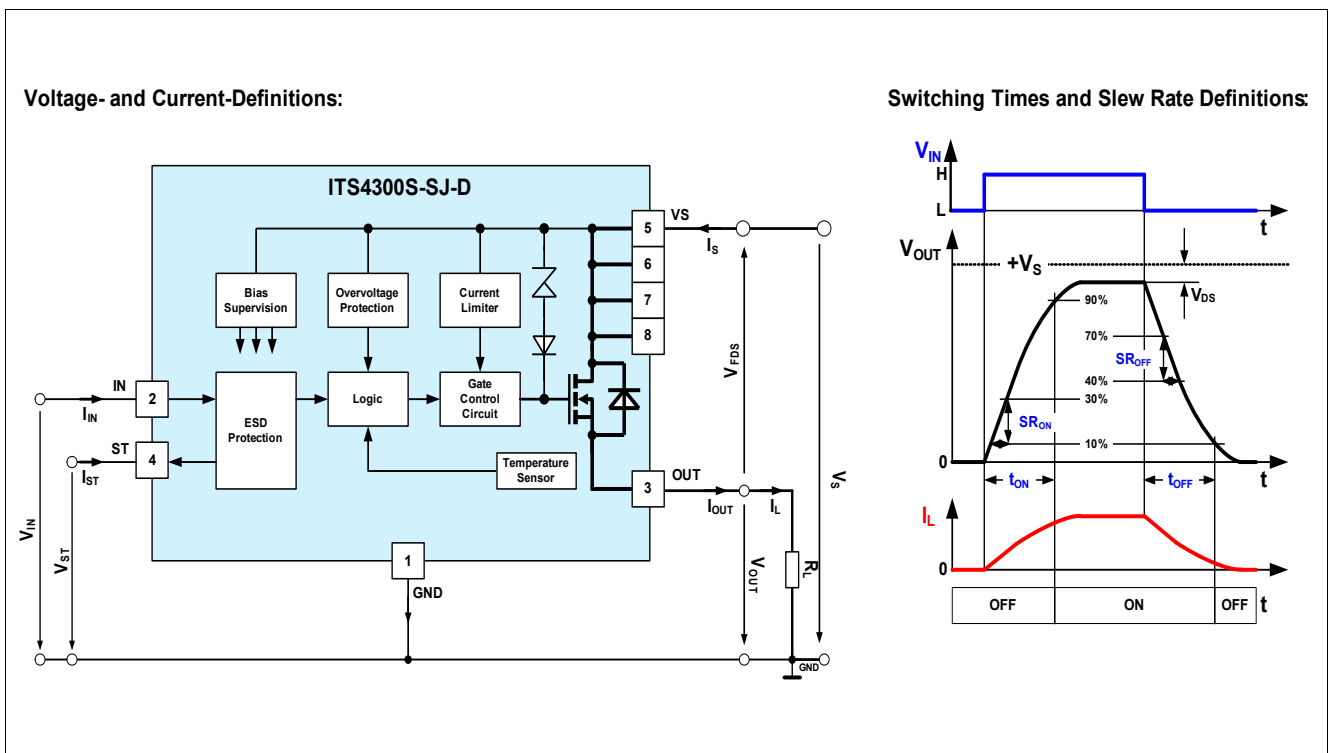


Figure 2 Terms - parameter definition

3 Pin Configuration

3.1 Pin Assignment

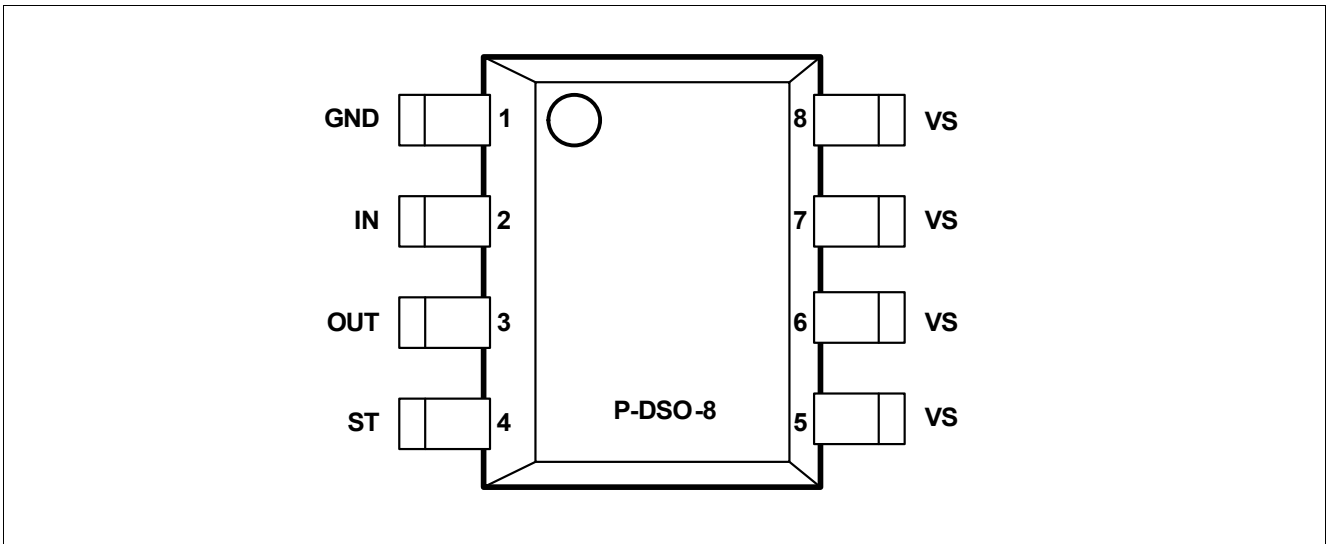


Figure 3 Pin configuration top view, PG-DSO-8

3.2 Pin Definitions and Functions

| Pin | Symbol | Function |
|------------|--------|--------------------------------------------------------------------------------------------------------------|
| 1 | GND | Logic ground |
| 2 | IN | Input, controls the power switch; the powerswitch is ON when high |
| 3 | OUT | Output to the load |
| 4 | ST | Status flag; diagnosis feedback; NMOS open drain |
| 5, 6, 7, 8 | VS | Supply voltage (design the wiring for the maximum short circuit current and also for low thermal resistance) |

4 General Product Characteristics

4.1 Absolute Maximum Ratings

Table 1 Absolute maximum ratings¹⁾ at T_j = 25°C unless otherwise specified. Currents flowing into the device unless otherwise specified in chapter “Block Diagram and Terms”

| Parameter | Symbol | Values | | | Unit | Note / Test Condition | Number |
|------------------------------------------------------------------------|------------------|--------|------|--------------|------|-----------------------|--------|
| | | Min. | Typ. | Max. | | | |
| Supply voltage V_S | | | | | | | |
| Voltage | V _S | – | – | 40 | V | | 4.1.1 |
| Voltage for short circuit protection | V _{SSC} | – | – | 28 | V | | 4.1.2 |
| Output stage OUT | | | | | | | |
| Output Current; (Short circuit current see electrical characteristics) | I _{OUT} | – | – | self limited | A | | 4.1.3 |
| Input IN | | | | | | | |
| Voltage | V _{IN} | -10 | – | 16 | V | | 4.1.4 |
| Current | I _{IN} | -5 | – | 5 | mA | | 4.1.5 |
| Status ST | | | | | | | |
| Current | I _{ST} | -5 | – | 5 | mA | | 4.1.6 |
| Temperatures | | | | | | | |
| Junction Temperature | T _j | -40 | – | 125 | °C | | 4.1.7 |
| Storage Temperature | T _{stg} | -55 | – | 125 | °C | | 4.1.8 |
| Power dissipation | | | | | | | |
| T _a = 25 °C ²⁾ | P _{tot} | | – | 1.4 | W | | 4.1.9 |
| Inductive load switch-off energy dissipation | | | | | | | |
| T _j = 125 °C; V _S =13.5V; IL= 0.3A ³⁾ | E _{AS} | | – | 800 | mJ | single pulse | 4.1.10 |
| ESD Susceptibility | | | | | | | |
| ESD susceptibility (input pin) | V _{ESD} | -1 | – | 1 | kV | HBM ⁴⁾ | 4.1.11 |
| ESD susceptibility (all other pins) | V _{ESD} | -5 | – | 5 | kV | HBM ⁴⁾ | 4.1.12 |

1) Not subject to production test, specified by design

2) Device on 50mm*50mm*1.5mm epoxy PCB FR4 with 6 cm² (one layer, 70mm thick) copper area for V_{bb} connection. PCB is vertical without blown air

3) Not subject to production test, specified by design

4) ESD susceptibility HBM according to EIA/JESD 22-A 114.

Note: Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as “outside” the normal operating range. Protection functions are neither designed for continuous nor repetitive operation.

4.2 Functional Range

Table 2 Functional Range

| Parameter | Symbol | Values | | | Unit | Note / Test Condition | Number |
|---------------------------|--------|--------|------|------|------|-----------------------|--------|
| | | Min. | Typ. | Max. | | | |
| Nominal Operating Voltage | V_S | 5 | | 34 | V | V_S increasing | 4.2.1 |

Note: Within the functional range the IC operates as described in the circuit description. The electrical characteristics are specified within the conditions given in the related electrical characteristics table.

4.3 Thermal Resistance

This thermal data was generated in accordance to JEDEC JESD51 standards.

More information on www.jedec.org

Table 3 Thermal Resistance¹⁾

| Parameter | Symbol | Values | | | Unit | Note / Test Condition | Number |
|---------------------------------------------------------------------|---------------------------|--------|------|------|------|-----------------------|--------|
| | | Min. | Typ. | Max. | | | |
| Thermal Resistance - Junction to pin5 | $R_{thj-pin5}$ | | 34.5 | | K/W | | 4.3.1 |
| Thermal Resistance - Junction to Ambient - 1s0p, minimal footprint | R_{thJA_1s0p} | | 145 | | K/W | ²⁾ | 4.3.2 |
| Thermal Resistance - Junction to Ambient - 1s0p, 300mm ² | $R_{thJA_1s0p_300mm^2}$ | | 89 | | K/W | ³⁾ | 4.3.3 |
| Thermal Resistance - Junction to Ambient - 1s0p, 600mm ² | $R_{thJA_1s0p_600mm^2}$ | | 78 | | K/W | ⁴⁾ | 4.3.4 |
| Thermal Resistance - Junction to Ambient - 2s2p | R_{thJA_2s2p} | | 85 | | K/W | ⁵⁾ | 4.3.5 |
| Thermal Resistance - Junction to Ambient with thermal vias - 2s2p | R_{thJA_2s2p} | | 60.4 | | K/W | ⁶⁾ | 4.3.6 |

1) Not subject to production test, specified by design

2) Specified R_{thJA} value is according to Jedec JESD51-3 at natural convection on FR4 1s0p board, footprint; the Product (Chip+Package) was simulated on a 76.2 x 114.3 x 1.5 mm board with 1x 70 μ m Cu.

3) Specified R_{thJA} value is according to Jedec JESD51-3 at natural convection on FR4 1s0p board, Cu, 300mm²; the Product (Chip+Package) was simulated on a 76.2 x 114.3 x 1.5 mm board with 1x 70 μ m Cu.

4) Specified R_{thJA} value is according to Jedec JESD51-3 at natural convection on FR4 1s0p board, 600mm²; the Product (Chip+Package) was simulated on a 76.2 x 114.3 x 1.5 mm board with 1x 70 μ m Cu.

5) Specified R_{thJA} value is according to Jedec JESD51-2,-5,-7 at natural convection on FR4 2s2p board; the Product (Chip+Package) was simulated on a 76.2 x 114.3 x 1.5 mm board with 2 inner copper layers (2 x 70 μ m Cu, 2 x 35 μ m Cu).

6) Specified R_{thJA} value is according to Jedec JESD51-2,-5,-7 at natural convection on FR4 2s2p board with two thermal vias; the Product (Chip+Package) was simulated on a 76.2 x 114.3 x 1.5 mm board with 2 inner copper layers (2 x 70 μ m Cu, 2 x 35 μ m Cu). The diameter of the two vias are equal 0.3mm and have a plating of 25 μ m with a copper heatsink area of 3mm x 2mm). JEDEC51-7: The two plated-through hole vias should have a solder land of no less than 1.25 mm diameter with a drill hole of no less than 0.85 mm diameter.

5 Electrical Characteristics

Table 4 $V_S=13.5V$; $T_j = -40^\circ C$ to $125^\circ C$; all voltages with respect to ground. Currents flowing into the device unless otherwise specified in chapter "Block Diagram and Terms". Typical values at $V_S = 13.5V$, $T_j = 25^\circ C$

| Parameter | Symbol | Values | | | Unit | Note / Test Condition | Number |
|----------------------------------------------------------------------------------------------------|-------------|--------|------|------|-------------|-------------------------------------------------------------------------------|--------|
| | | Min. | Typ. | Max. | | | |
| Powerstage | | | | | | | |
| NMOS ON Resistance | R_{DSON} | | 300 | 400 | m Ω | $I_{OUT}= 0.3A$; $T_j = 25^\circ C$; $9V < V_S < 34V$; $V_{IN}= 5V$ | 5.0.1 |
| NMOS ON Resistance | R_{DSON} | | 480 | 600 | m Ω | $I_{OUT}= 0.3A$; $T_j = 125^\circ C$; $9V < V_S < 34V$; $V_{IN}= 5V$ | 5.0.2 |
| Nominal Load Current; device on PCB ¹⁾ | I_{LNOM} | 0.4 | | | A | $T_{pin5} = 85^\circ C$ | 5.0.3 |
| Timings of Power Stages²⁾ | | | | | | | |
| Turn ON Time(to 90% of V_{out}); L to H transition of V_{IN} | t_{ON} | | | 140 | μs | $V_S=13.5V$; $R_L = 47\Omega$ | 5.0.4 |
| Turn OFF Time (to 10% of V_{out}); H to L transition of V_{IN} | t_{OFF} | | | 170 | μs | $V_S=13.5V$; $R_L = 47\Omega$ | 5.0.5 |
| ON-Slew Rate (10 to 30% of V_{out}); L to H transition of V_{IN} | SR_{ON} | | | 2.0 | V / μs | $V_S=13.5V$; $R_L = 47\Omega$ | 5.0.6 |
| OFF-Slew Rate; dV_{OUT} / dt_{ON} (70 to 40% of V_{out}); H to L transition of V_{IN} | SR_{OFF} | | | 2.0 | V / μs | $V_S=13.5V$; $R_L = 47\Omega$ | 5.0.7 |
| Under voltage lockout (charge pump start-stop-restart) | | | | | | | |
| Supply undervoltage; charge pump stop voltage | V_{SUV} | | | 5.5 | V | V_S decreasing | 5.0.8 |
| Supply startup voltage; Charge pump restart voltage | V_{SSU} | | | 5.5 | V | V_S increasing | 5.0.9 |
| Current consumption | | | | | | | |
| Operating current | I_{GND} | | | 1.3 | mA | $V_{IN}= 5V$ | 5.0.10 |
| Standby current | I_{SSTB} | | | 26 | μA | $V_{IN}= 0V$; $V_{OUT}= 0V$ $-40^\circ C < T_j < 85^\circ C$ | 5.0.11 |
| Standby current | I_{SSTB} | | | 26 | μA | $V_{IN}= 0V$; $T_j = 125^\circ C$ | 5.0.12 |
| Output leakage current | I_{OUTLK} | | | 12 | μA | $V_{IN}= 0V$; $V_{OUT}= 0V$ | 5.0.13 |
| Protection functions³⁾ | | | | | | | |
| Initial peak short circuit current limit | I_{LSCP} | | | 2 | A | $T_j = -40^\circ C$; $V_S = 20V$; $V_{IN} = 5.0V$ | 5.0.14 |
| Initial peak short circuit current limit | I_{LSCP} | | 1.2 | | A | $T_j = 25^\circ C$; $V_S = 20V$; $V_{IN} = 5.0V$ | 5.0.15 |
| Initial peak short circuit current limit | I_{LSCP} | 0.4 | | | A | $T_j = 125^\circ C$; $V_S = 20V$; $V_{IN} = 5.0V$ | 5.0.16 |

Electrical Characteristics

Table 4 $V_S=13.5V$; $T_j = -40^\circ C$ to $125^\circ C$; all voltages with respect to ground. Currents flowing into the device unless otherwise specified in chapter "Block Diagram and Terms". Typical values at $V_S = 13.5V$, $T_j = 25^\circ C$

| Parameter | Symbol | Values | | | Unit | Note / Test Condition | Number |
|-----------------------------------------------------------------------------------|-------------|--------|------|------|------------|------------------------------------------------------------|--------|
| | | Min. | Typ. | Max. | | | |
| Repetitive short circuit current limit $T_j = T_{jTrip}$; see timing diagrams | I_{LSCR} | | 1 | | A | $V_{IN} = 5.0V$ | 5.0.17 |
| Output clamp at $V_{OUT} = V_S - V_{DSCL}$ (inductive load switch off) | V_{DSCL} | 41 | 47 | | V | $I_S = 4mA$ | 5.0.18 |
| Oversvoltage protection $V_{OUT} = V_S - V_{ONCL}$ | V_{SAZ} | 41 | | | V | $I_S = 4mA$ | 5.0.19 |
| Thermal overload trip temperature | T_{jTrip} | 150 | | | $^\circ C$ | | 5.0.20 |
| Thermal hysteresis | T_{HYS} | | 10 | | K | | 5.0.21 |
| Reverse Battery⁴⁾ | | | | | | | |
| Continuous reverse battery voltage | V_{SREV} | - 32 | | | V | | 5.0.22 |
| Forward voltage of the drain-source reverse diode | V_{FDS} | | 600 | | mV | $I_{FDS} = 200mA$; $V_{IN} = 0V$; $T_j = 125^\circ C$ | 5.0.23 |
| Input interface; pin IN | | | | | | | |
| Input turn-ON threshold voltage | V_{INON} | 2.2 | | | V | | 5.0.24 |
| Input turn-OFF threshold voltage | V_{INOFF} | | | 0.8 | V | | 5.0.25 |
| Input threshold hysteresis | V_{INHYS} | | 0.3 | | V | | 5.0.26 |
| Off state input current | I_{INOFF} | 1 | | 30 | μA | $V_{IN} = 0.7V$ | 5.0.27 |
| On state input current | I_{INON} | 1 | | 30 | μA | $V_{IN} = 5.0V$ | 5.0.28 |
| Input resistance | R_{IN} | 1.5 | 3.5 | 5.0 | k Ω | | 5.0.29 |
| Status output (NMOS open drain); pin ST | | | | | | | |
| Status output zener voltage | V_{STZ} | 5.4 | 6.1 | 6.8 | V | $I_{ST} = 1.6mA$ | 5.0.30 |
| Status output low voltage | V_{STLO} | | | 0.4 | V | $I_{ST} = 1.6mA$ $T_j < 25^\circ C$ | 5.0.31 |
| Status output low voltage | V_{STLO} | | | 0.6 | V | $I_{ST} = 1.6mA$ $T_j < 125^\circ C$ | 5.0.32 |
| Status leakage current | I_{STLK} | | | 2 | μA | $V_{ST} = 5V$ $T_j < 105^\circ C$ | 5.0.33 |
| Status invalid time after positive input slope ⁵⁾ | t_{dP} | | 300 | 600 | μs | $V_S = 20V$ | 5.0.34 |
| Diagnostic characteristics | | | | | | | |
| Short circuit detection voltage | V_{OUTSC} | | 2.8 | | V | | 5.0.35 |
| Open load detection voltage ⁶⁾ | V_{OUTOL} | | 3 | | V | | 5.0.36 |
| Open load detection current ⁷⁾ (included in standby current) | I_{OUTOL} | | 5 | | μA | $V_{OUT} = 4V$ | 5.0.37 |

- 1) Device on 50mm x 50mm x 1,5mm epoxy FR4 PCB with 6cm² (one layer copper 70um thick) copper area for supply voltage connection. PCB in vertical position without blown air.
- 2) Timing values only with high slewrate input signal; otherwise slower.
- 3) Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.


Electrical Characteristics

- 4) Requires a 150 Ω resistor in GND connection. The reverse load current through the intrinsic drain-source diode of the power-MOS has to be limited by the connected load. Power dissipation is higher compared to normal operation due to the voltage drop across the drain-source diode. The temperature protection is not functional during reverse current operation! Input current has to be limited (see max ratings).
- 5) No delay time after overtemperature switch off and short circuit in on-state.
- 6) External pull up resistor required for open load detection in off state.
- 7) External pull up resistor required for open load detection in off state.


6 Typical Performance Graphs

Typical Performance Characteristics


Transient Thermal Impedance Z_{thJA} versus Pulse Time t_p @ 6cm² heatsink area

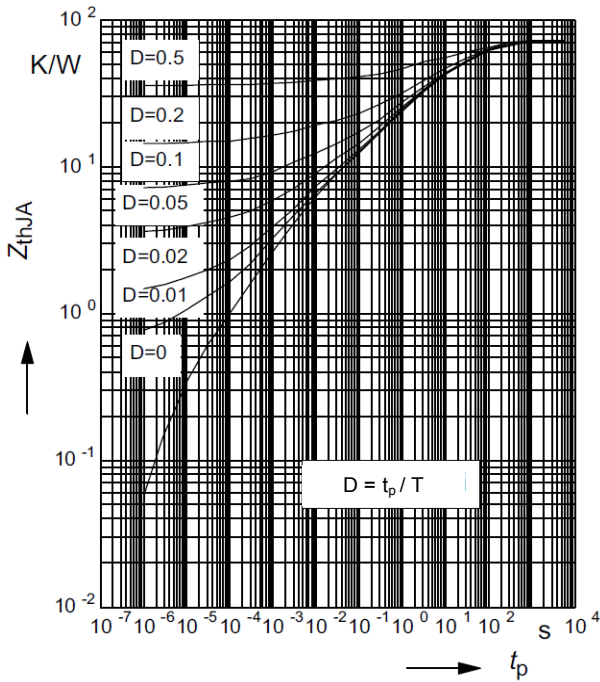


Transient Thermal Impedance Z_{thJA} versus Pulse Time t_p @ min footprint

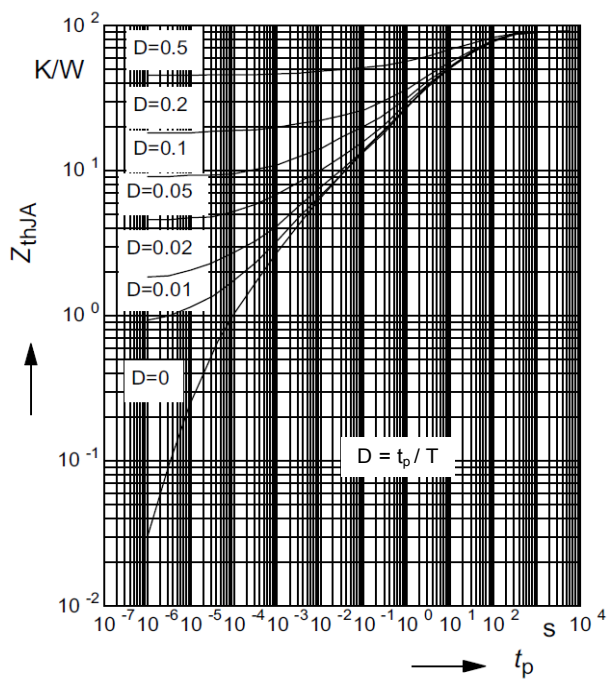

On-Resistance $R_{DS(on)}$ versus Junction Temperature T_j

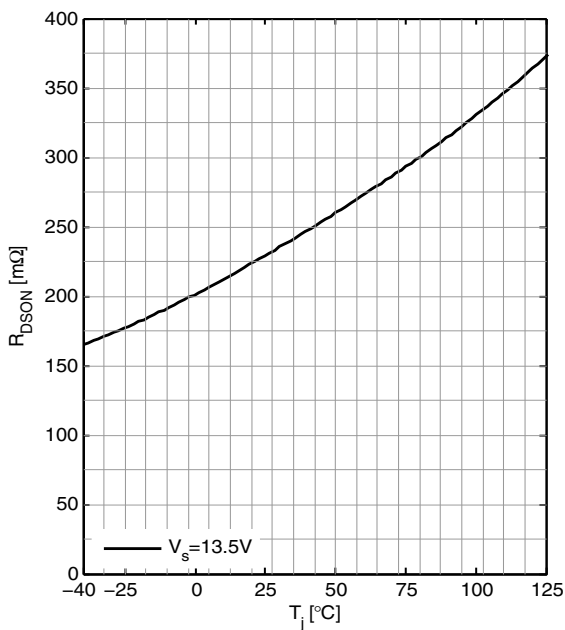


On-Resistance $R_{DS(on)}$ versus Supply Voltage V_s

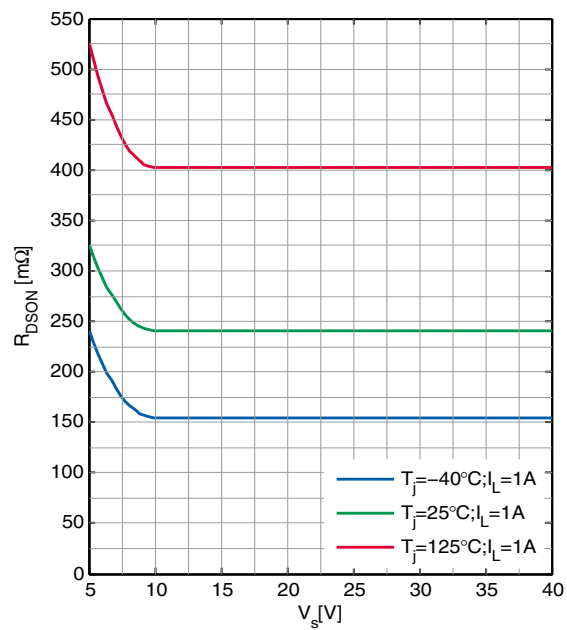


Typical Performance Characteristics


Switch ON Time t_{ON} versus Junction Temperature T_j

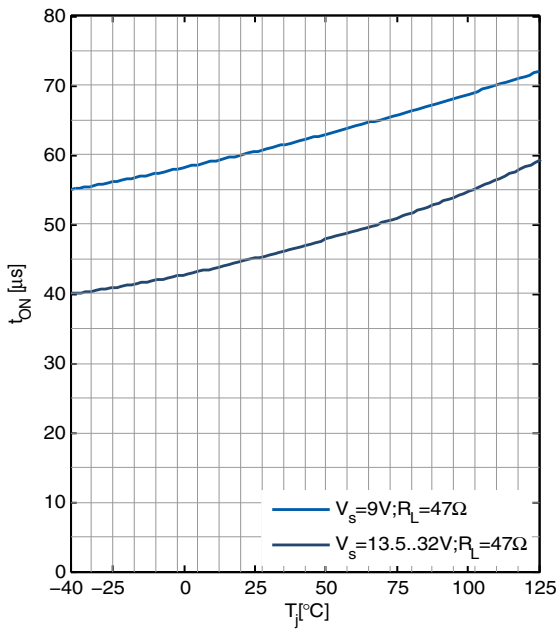


Switch OFF Time t_{OFF} versus Junction Temperature T_j

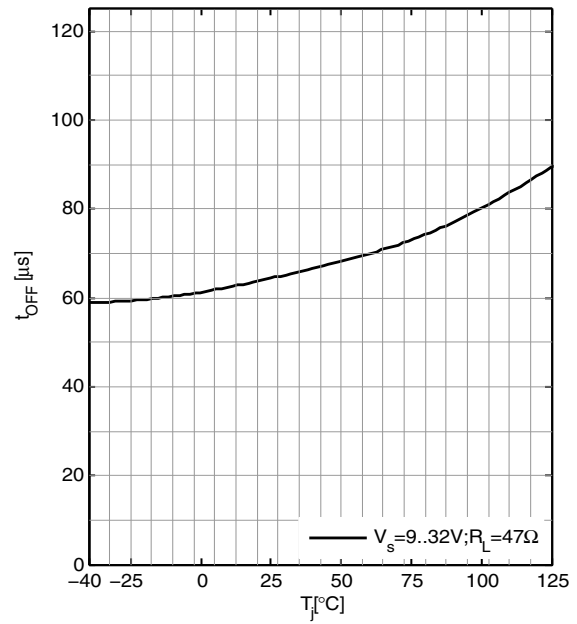

ON Slewwrate SR_{ON} versus Junction Temperature T_j

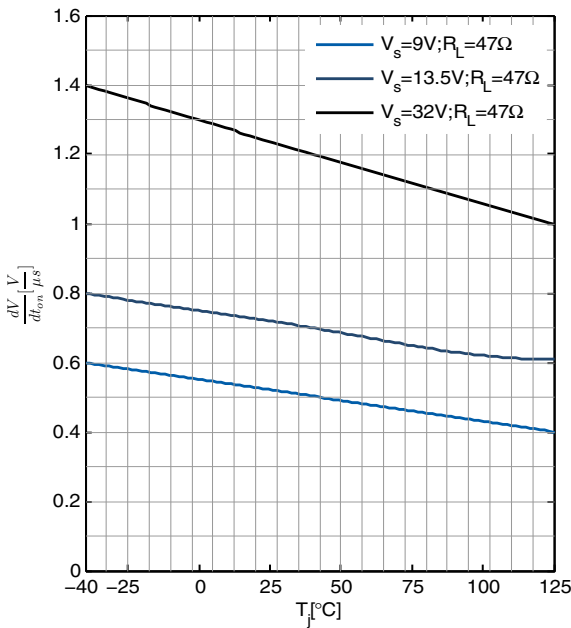


OFF Slewwrate SR_{OFF} versus Junction Temperature T_j

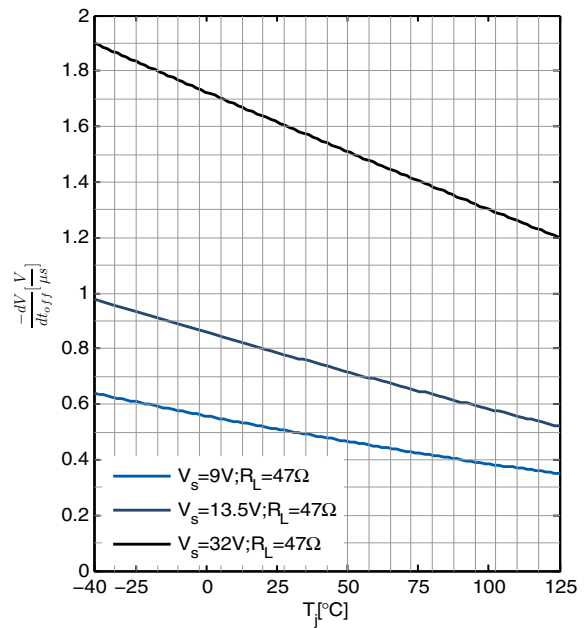


Typical Performance Characteristics


Standby Current I_{SSTB} versus Junction Temperature T_j

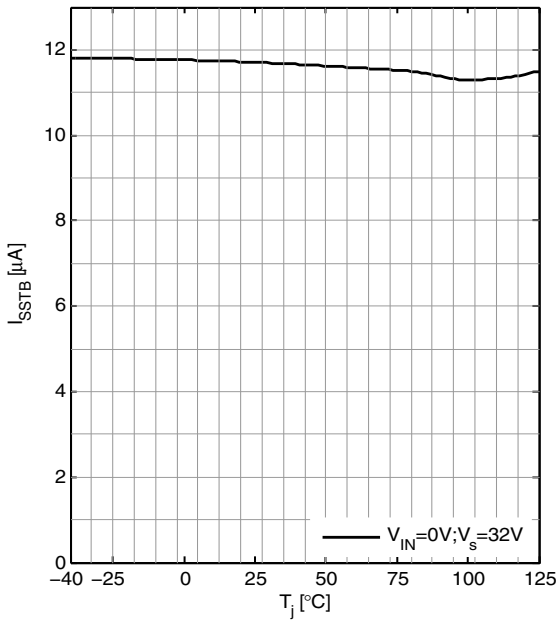


Output Leakage current I_{OUTLK} versus Junction Temperature T_j

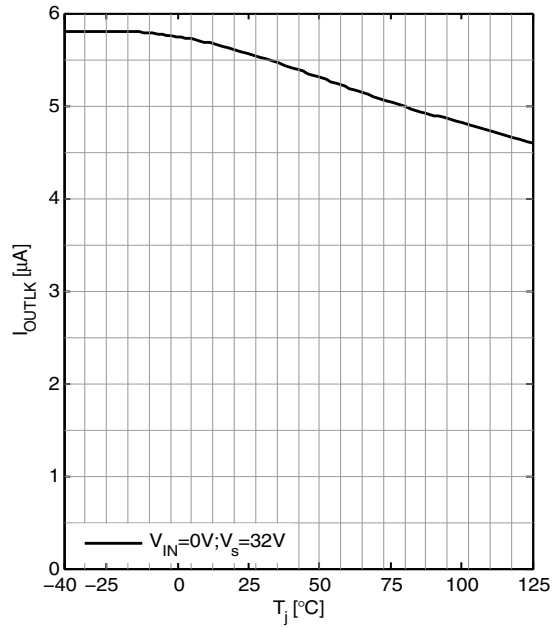

Initial Peak Short Circuit Current Limit I_{LSCP} versus Junction Temperature T_j

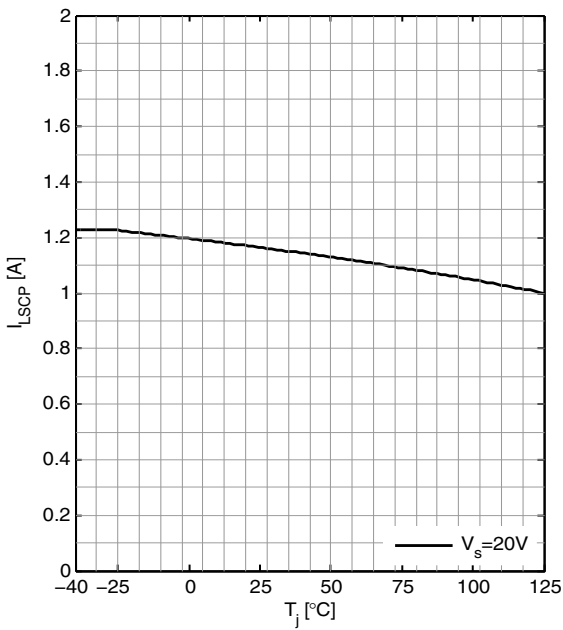


Initial Short Circuit Shutdown time t_{SCOFF} versus Junction Temperature T_j

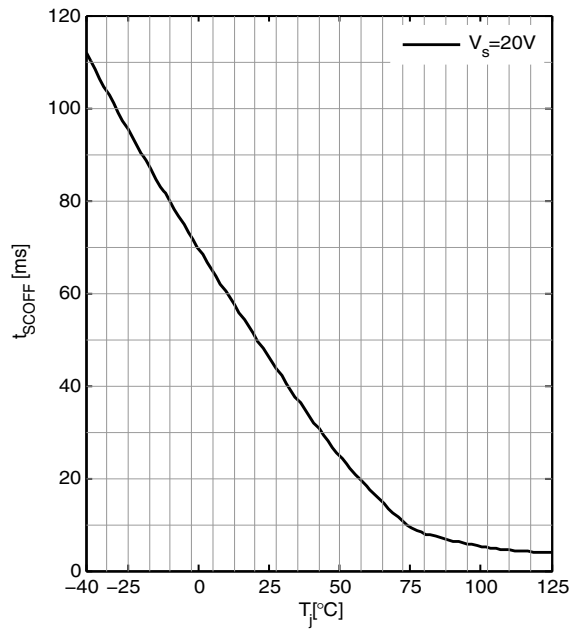


Typical Performance Characteristics


Input Current Consumption I_{IN} versus Junction Temperature T_j

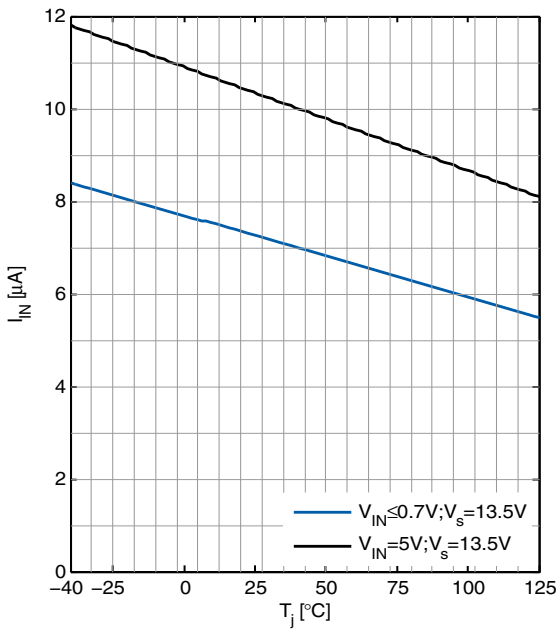


Input Current Consumption I_{IN} versus Input voltage V_{IN}

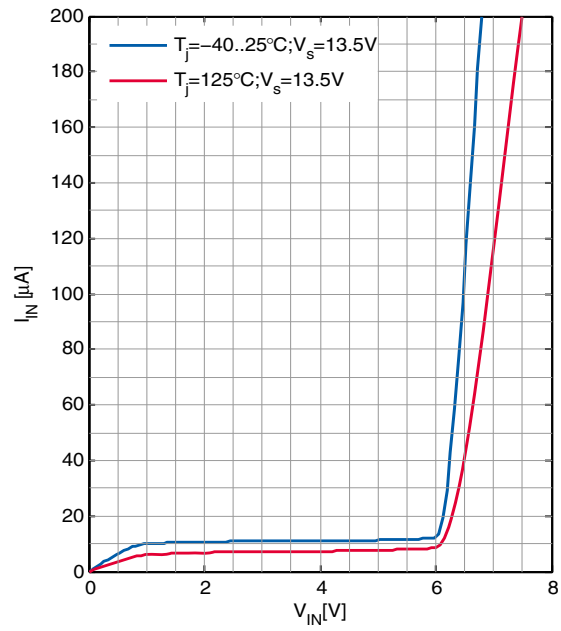

Input Threshold voltage $V_{INH,L}$ versus Junction Temperature T_j

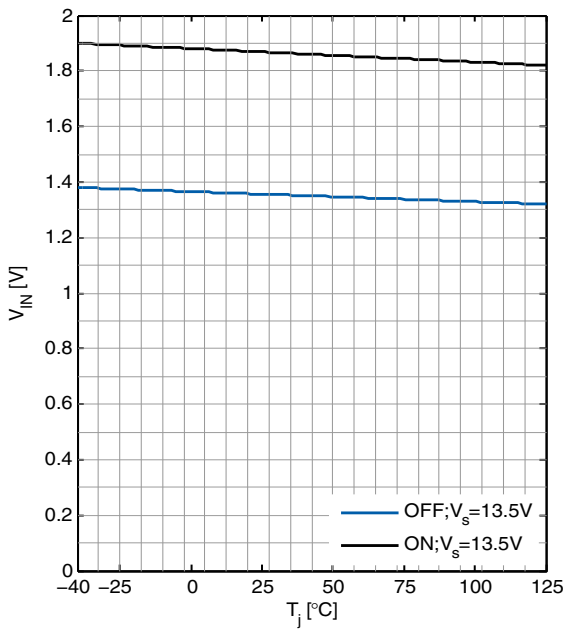


Input Threshold voltage $V_{INH,L}$ versus Supply Voltage V_S

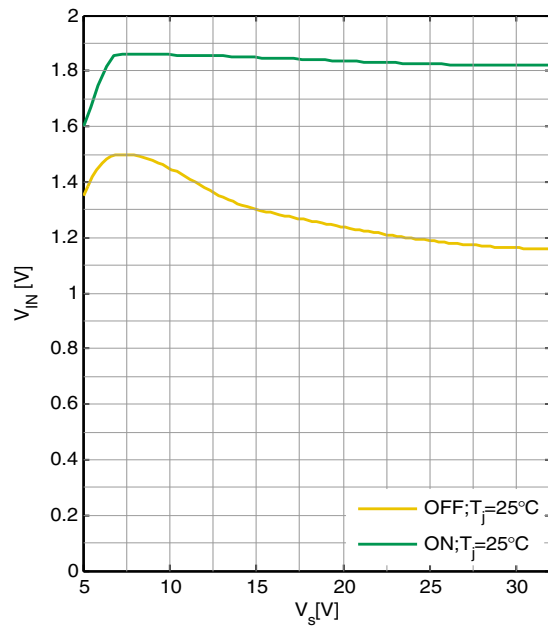


Typical Performance Graphs


Max. allowable Load Inductance L versus Load current I_L

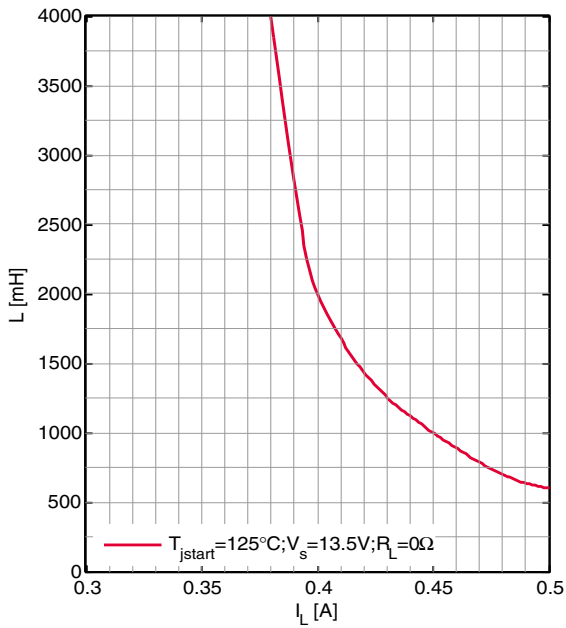

Max. allowable Inductive single pulse Switch-off Energy E_{AS} versus Load current I_L

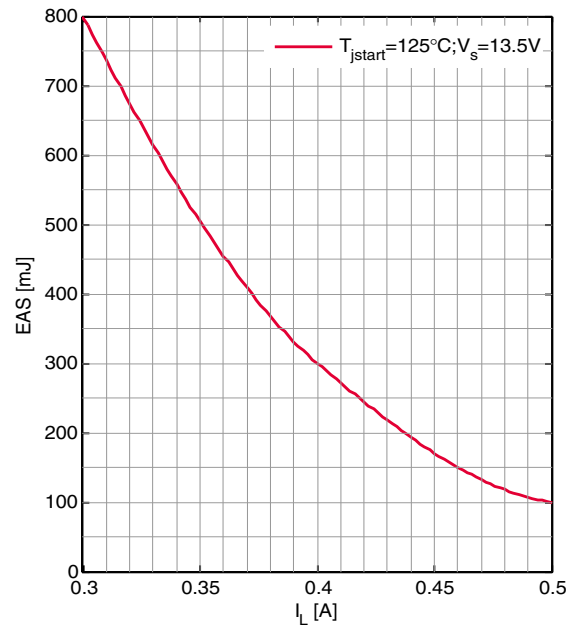

Status Delay Time t_{dP} versus Supply Voltage V_s

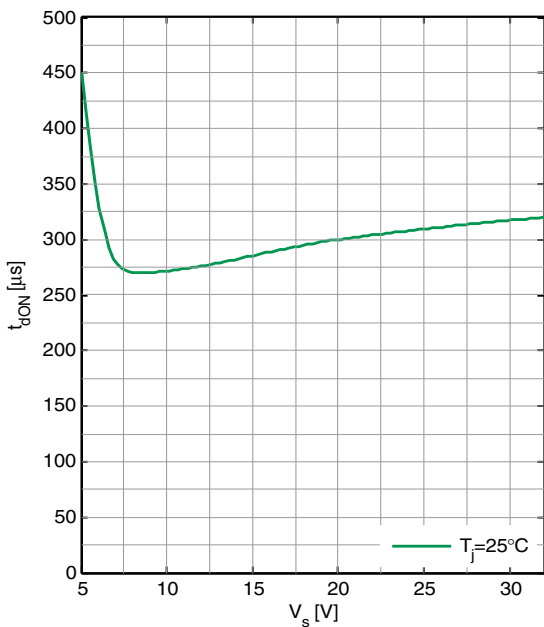

7 Application Information

7.1 Application Diagram

The following information is given as a hint for the implementation of the device only and shall not be regarded as a description or warranty for a certain functionality, condition or quality of the device.

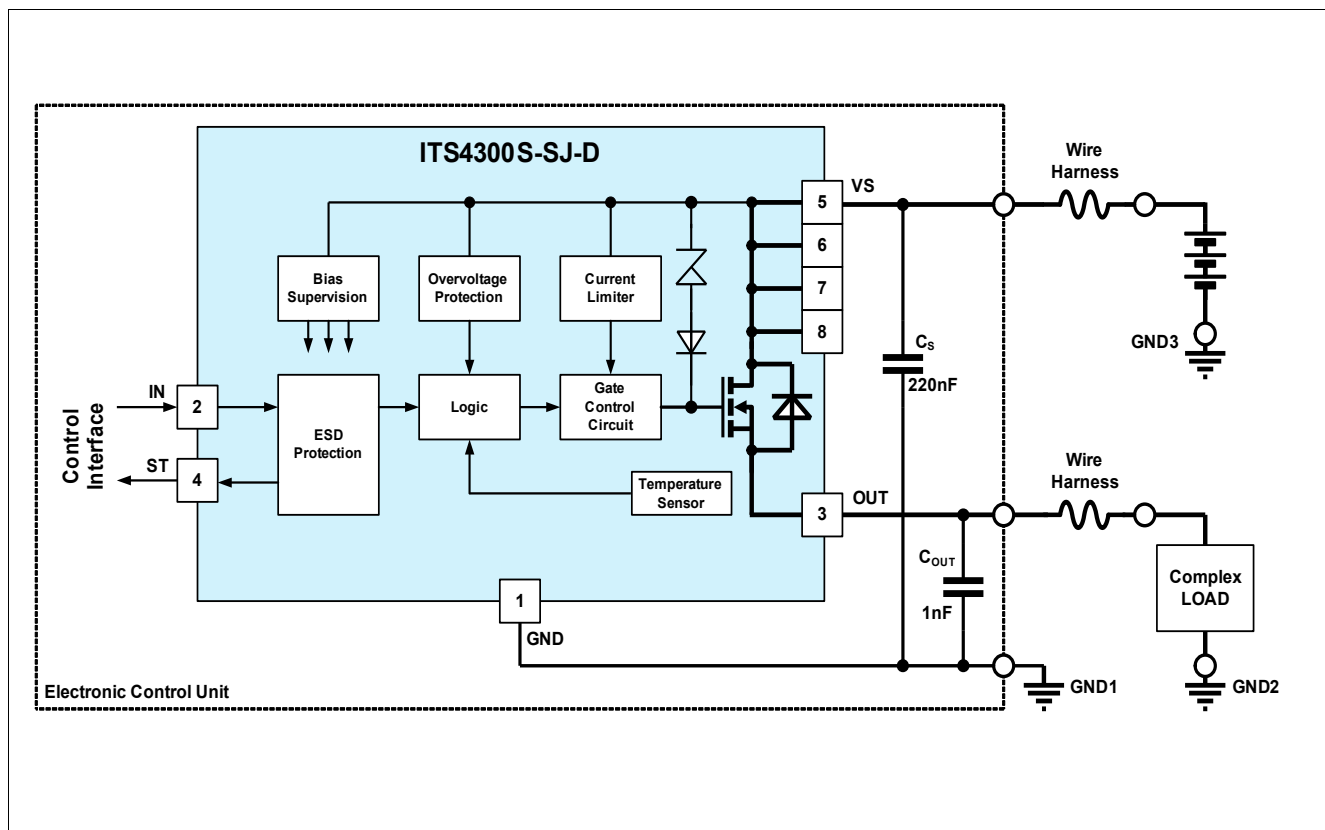


Figure 4 Application Diagram

The ITS4300S-SJ-D can be connected directly to a supply network. It is recommended to place a ceramic capacitor (e.g. $C_S = 220\text{nF}$) between supply and GND to avoid line disturbances. Wire harness inductors/resistors are sketched in the application circuit above.

The complex load (resistive, capacitive or inductive) must be connected to the output pin OUT.

A built-in current limit protects the device against destruction.

The ITS4300S-SJ-D can be switched on and off with standard logic ground related logic signal at pin IN.

In standby mode (IN=L) the ITS4300S-SJ-D is deactivated with very low current consumption.

The output voltage slope is controlled during on and off transition to minimize emissions. Only a small ceramic capacitor $C_{OUT}=1\text{nF}$ is recommended to attenuate RF noise.

In the following chapters the main features, some typical waveforms and the protection behaviour of the ITS4300S-SJ-D is shown. For further details please refer to application notes on the Infineon homepage.

7.2 Diagnosis Description

For diagnostic purpose the device provides a digital output pin ST in order to indicate fault conditions.

The status output (ST) of the ITS4300S-SJ-D is a high voltage open drain output.

In “normal” operation mode the NMOS open drain transistor is switched OFF.

The following truth table defines the status output.

Table 5 Truth Table of diagnosis feature

| Device Operation | IN | OUT | ST | Comment |
|---------------------------------------|----|-----|----|-----------------------------------------------------------------------------|
| Normal Operation | H | H | H | |
| Short circuit to GND | L | L | H | No diagnosis |
| Short circuit to GND | H | L | L | OUT=L: $V_{OUT} < V_{OUTSC}$; Short circuit detection voltage; typ 2.8V |
| Short Circuit to V_S (in OFF state) | L | H | L | |
| Short Circuit to V_S (in ON state) | H | H | H | No diagnosis |
| Overload | L | L | H | No diagnosis |
| Overload | H | H | H | OUT=H: $V_{OUT} > V_{OUTSC}$; Short circuit detection voltage; typ 2.8V |
| Overtemperature | L | L | H | No diagnosis |
| Overtemperature | H | L | L | |
| Open Load in OFF state | L | H | L | |
| Open Load in OFF state | H | H | H | No diagnosis |

7.3 Special Feature Description

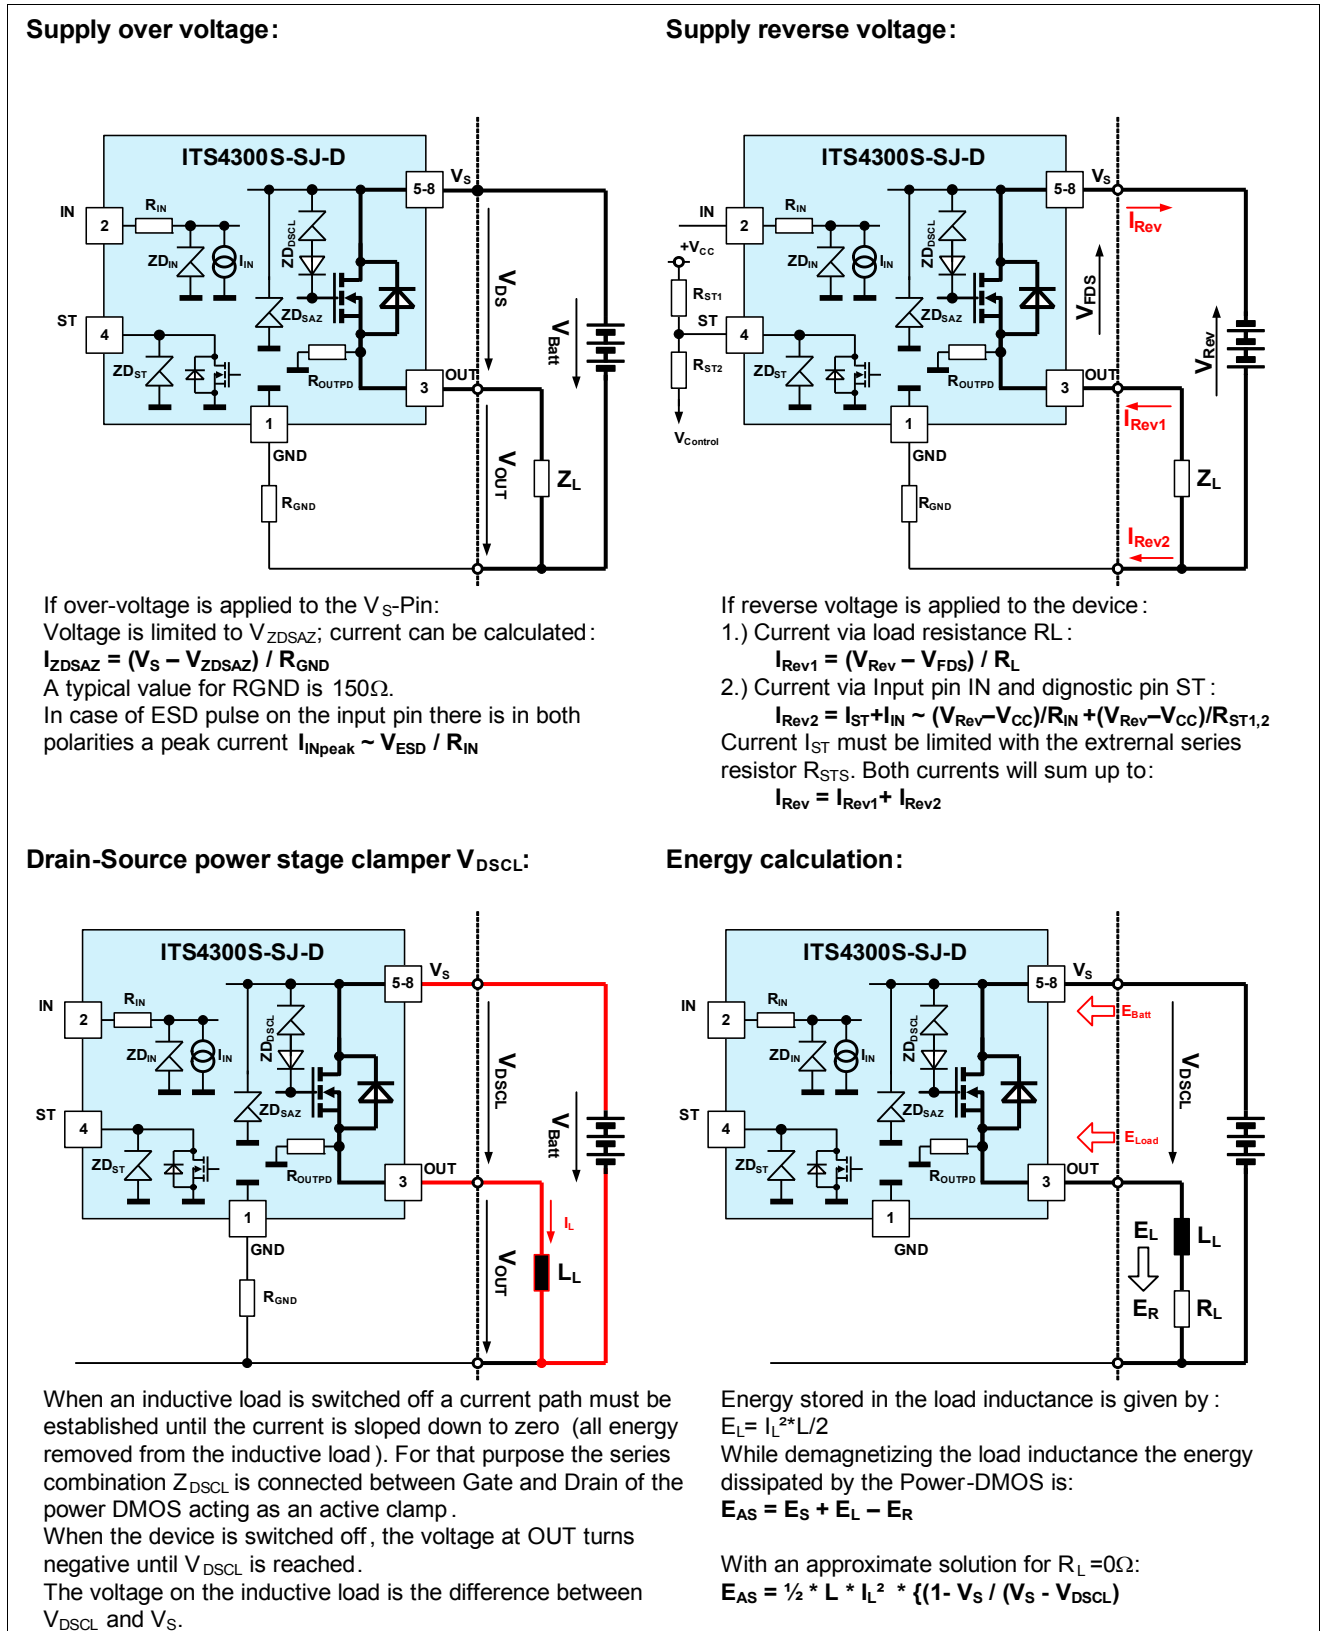


Figure 5 Special feature description

7.4 Typical Application Waveforms

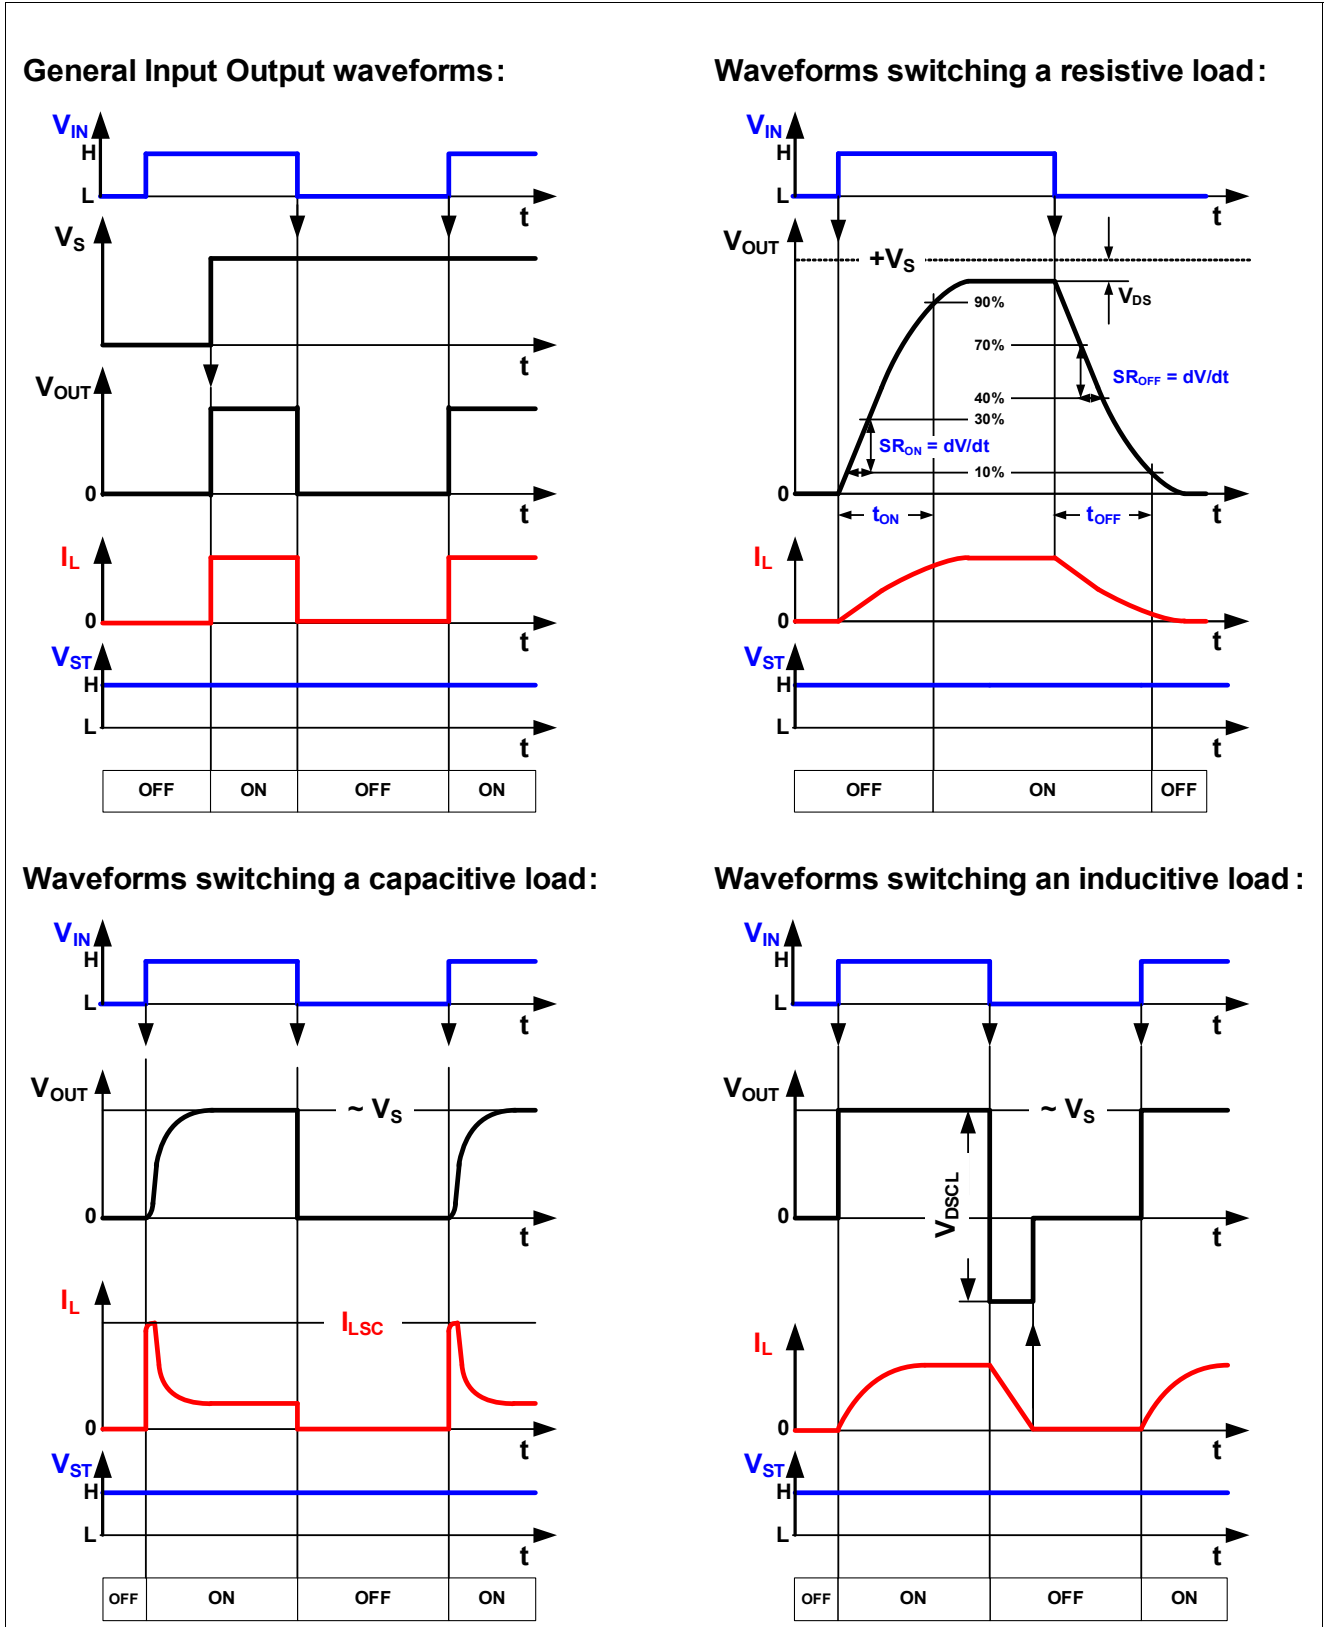


Figure 6 Typical application waveforms of the ITS4300S-SJ-D

7.5 Protection Behavior

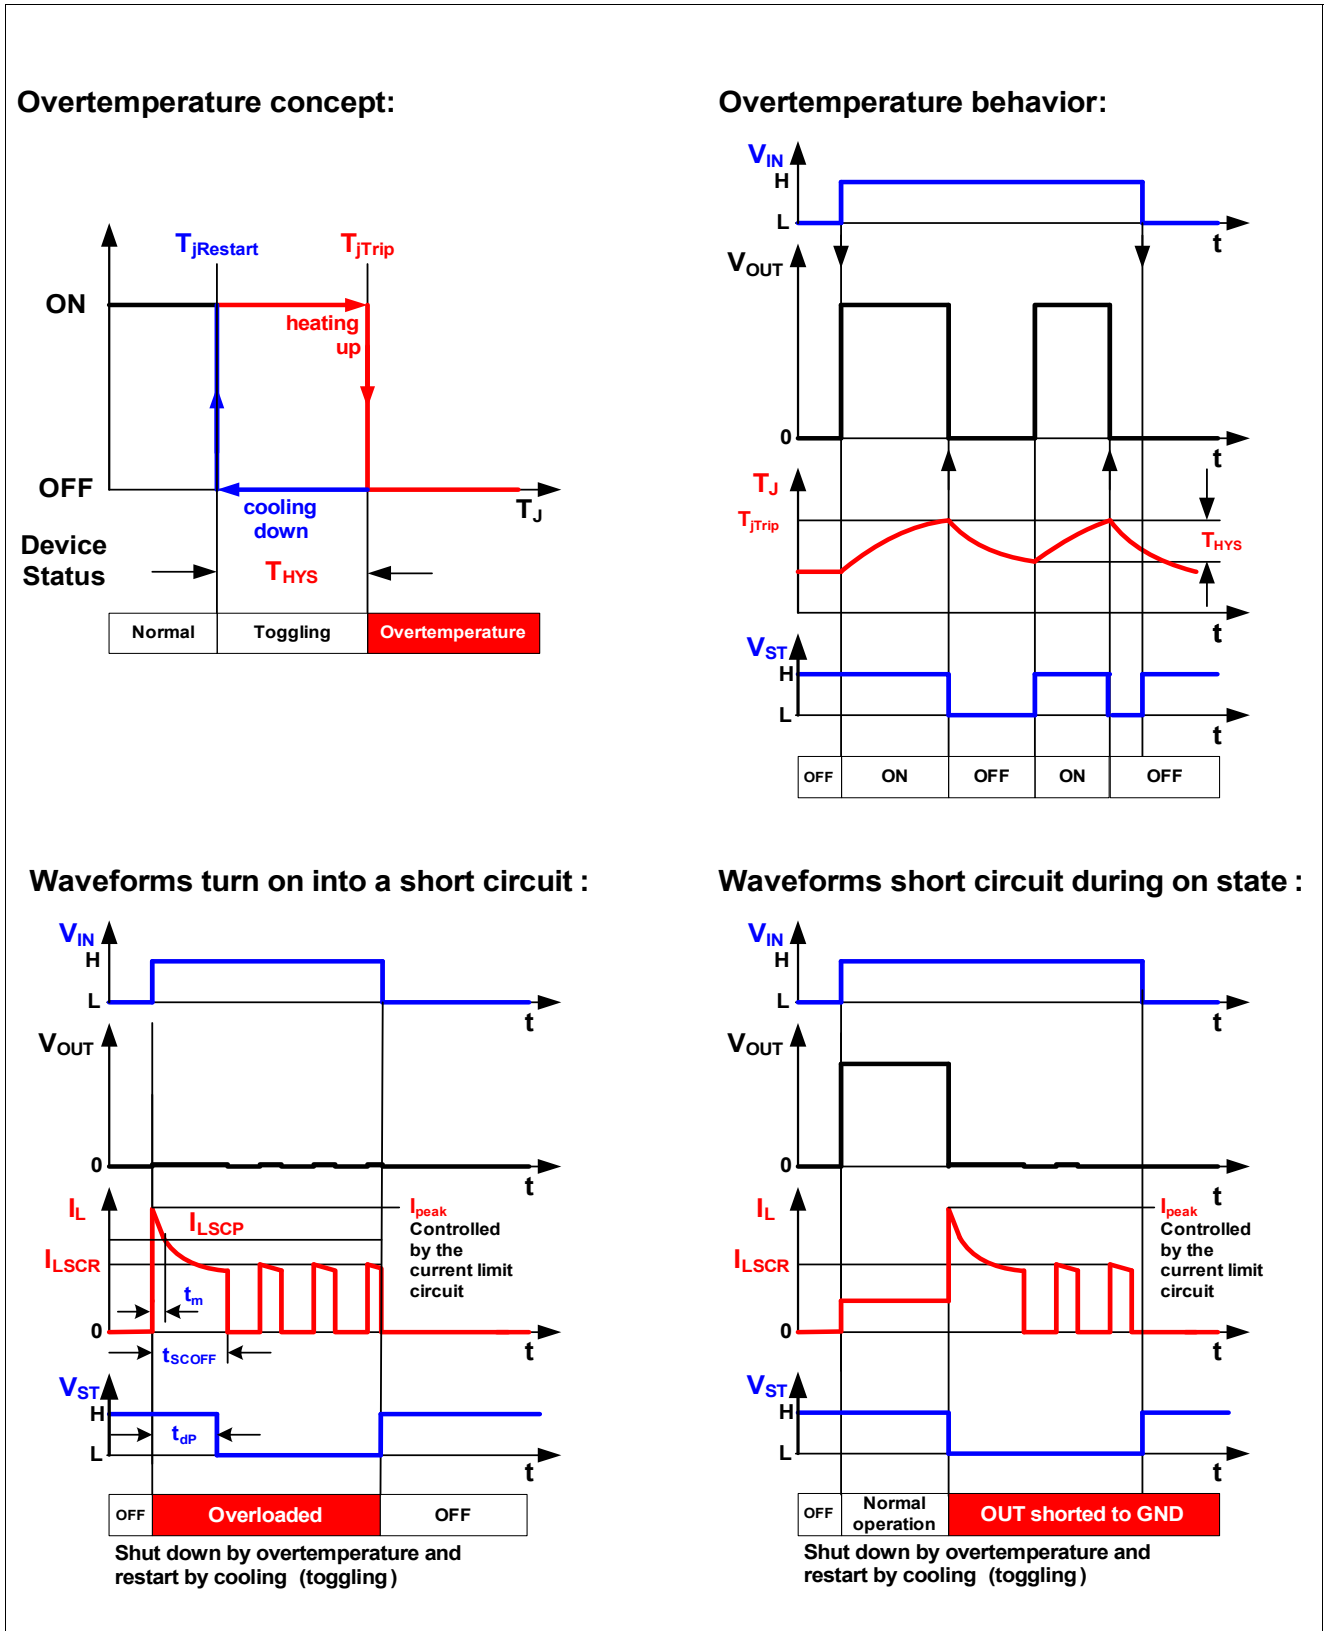


Figure 7 Protective behaviour of the ITS4300S-SJ-D

8 Package outlines and footprint

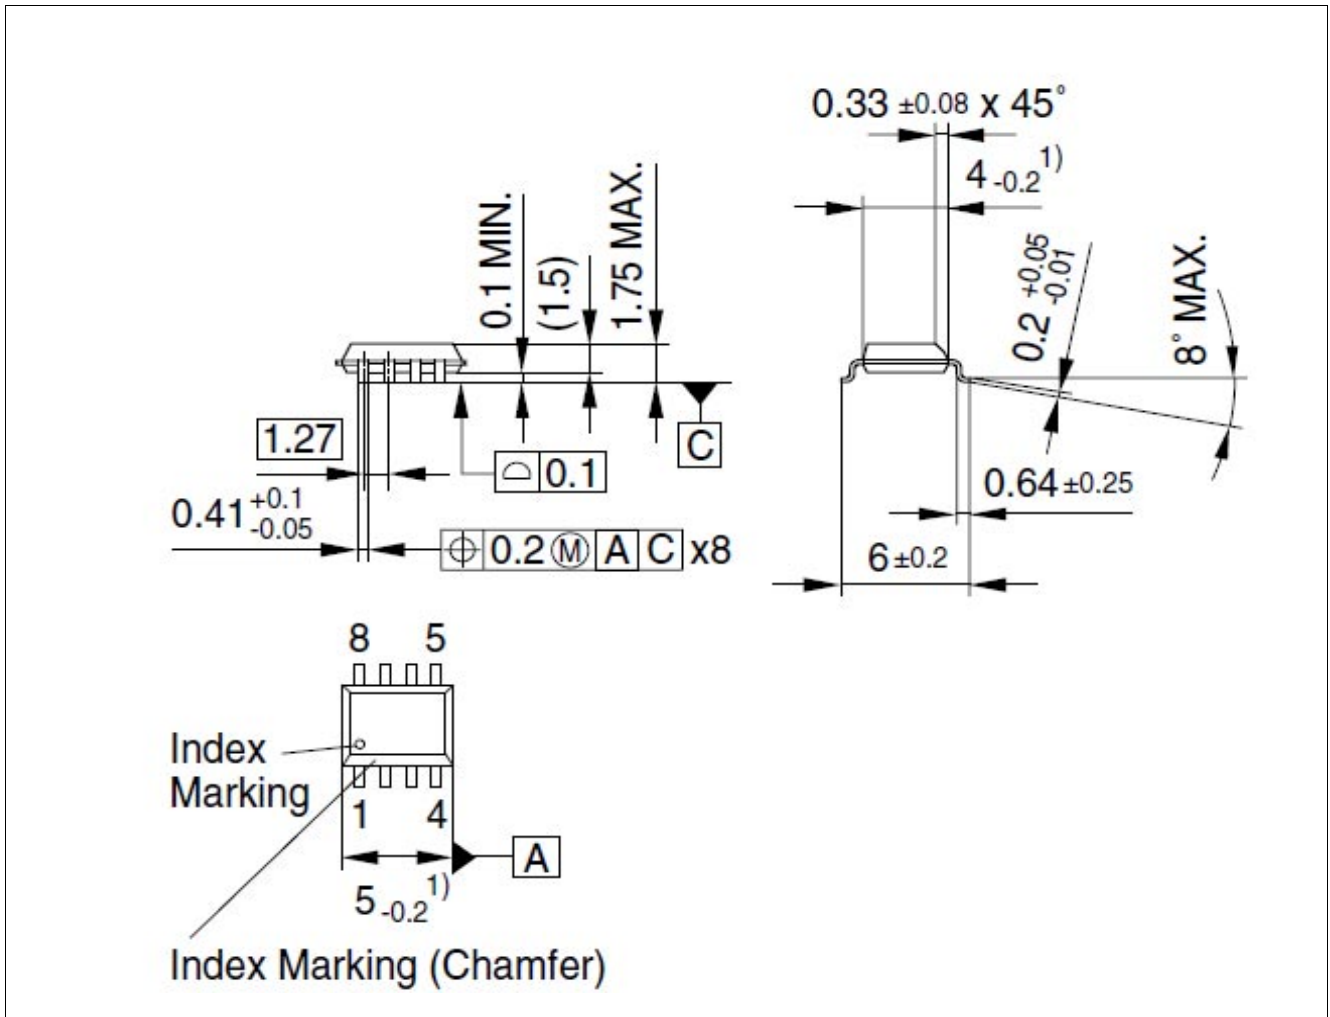


Figure 8 PG-DSO-8 (Plastic Dual Small Outline Package, RoHS-Compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e. Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020)

9 Revision History

| Revision | Date | Changes |
|----------|----------|-------------------|
| V 1.0 | 12-09-01 | Datasheet release |
| | | |
| | | |
| | | |

Trademarks of Infineon Technologies AG

AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, EconoPACK™, CoolMOS™, CoolSET™, CORECONTROL™, CROSSAVE™, DAVE™, DI-POL™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPIM™, EconoPACK™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, I²RF™, ISOFACE™, IsoPACK™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OptiMOS™, ORIGA™, POWERCODE™, PRIMARION™, PrimePACK™, PrimeSTACK™, PRO-SIL™, PROFET™, RASIC™, ReverSave™, SatRIC™, SIEGET™, SINDRION™, SIPMOS™, SmartLEWIS™, SOLID FLASH™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™.

Other Trademarks

Advance Design System™ (ADS) of Agilent Technologies, AMBA™, ARM™, MULTI-ICE™, KEIL™, PRIMECELL™, REALVIEW™, THUMB™, µVision™ of ARM Limited, UK. AUTOSAR™ is licensed by AUTOSAR development partnership. Bluetooth™ of Bluetooth SIG Inc. CAT-iq™ of DECT Forum. COLOSSUS™, FirstGPS™ of Trimble Navigation Ltd. EMV™ of EMVCo, LLC (Visa Holdings Inc.). EPCOS™ of Epcos AG. FLEXGO™ of Microsoft Corporation. FlexRay™ is licensed by FlexRay Consortium. HYPERTERMINAL™ of Hilgraeve Incorporated. IEC™ of Commission Electrotechnique Internationale. IrDA™ of Infrared Data Association Corporation. ISO™ of INTERNATIONAL ORGANIZATION FOR STANDARDIZATION. MATLAB™ of MathWorks, Inc. MAXIM™ of Maxim Integrated Products, Inc. MICROTEC™, NUCLEUS™ of Mentor Graphics Corporation. MIPI™ of MIPI Alliance, Inc. MIPS™ of MIPS Technologies, Inc., USA. muRata™ of MURATA MANUFACTURING CO., MICROWAVE OFFICE™ (MWO) of Applied Wave Research Inc., OmniVision™ of OmniVision Technologies, Inc. Openwave™ Openwave Systems Inc. RED HAT™ Red Hat, Inc. RFMD™ RF Micro Devices, Inc. SIRIUS™ of Sirius Satellite Radio Inc. SOLARIS™ of Sun Microsystems, Inc. SPANSION™ of Spansion LLC Ltd. Symbian™ of Symbian Software Limited. TAIYO YUDEN™ of Taiyo Yuden Co. TEAKLITE™ of CEVA, Inc. TEKTRONIX™ of Tektronix Inc. TOKO™ of TOKO KABUSHIKI KAISHA TA. UNIX™ of X/Open Company Limited. VERILOG™, PALLADIUM™ of Cadence Design Systems, Inc. VLYNQ™ of Texas Instruments Incorporated. VXWORKS™, WIND RIVER™ of WIND RIVER SYSTEMS, INC. ZETEX™ of Diodes Zetex Limited.

Last Trademarks Update 2011-11-11

Edition 2012-09-01

**Published by
Infineon Technologies AG
81726 Munich, Germany**

**© 2012 Infineon Technologies AG
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[ITS4300SSJDXUMA1](#)