sensdar[®]

80 EG fan Series x80x25mm



Optional Features













Bearing Type: Sleeve Bearing & Ball Bearing

Material: Impeller & Frame: Plastic (UL94V-0)

Lead Wire: UL Type

Operation Temperature: $-10^{\circ}\text{C}-70^{\circ}\text{C}$, 35%-85%RH Storage Temperature: $-40^{\circ}\text{C}-80^{\circ}\text{C}$, 35%-85%RH





SPECIFICATIONS

	Model	Bearing System		Rated Voltage	Freq.	Operation Voltage	Rated Current	Power	Rated Speed	Air Flow	Air Pressure	Noise Level	Weight
ı		Ball	Sleeve	VAC	Hz	VAC	Α	W	RPM	CFM	mmH ₂ O	dBA	g
I	SE8025HB	•		115/230	50/60	98-264	0.05	5.0	3200	42.5	4.3	34	76
I	SE8025MX	•	•				0.04	4.0	2800	35.7	3.3	28	
	SE8025LX	•	•				0.03	3.0	2400	30.2	2.2	23	

DIMENSIONS DRAWING

P&Q CURVE (AT RATED VOLTAGE)

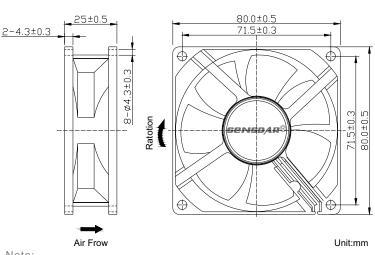

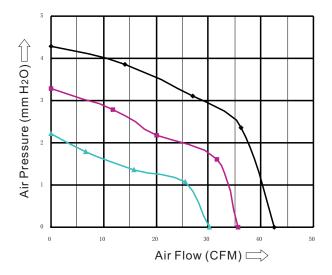

Note:

*Specifications are subject to change without prior notice.

^{*}All readings are typical values at rated voltage.

^{* &}quot;X" in model list can be B, S, and C, meaning Dual Ball Bearing, Sleeve Bearing and 1 Ball 1 Sleeve Bearing