# CD4049UBC,CD4049UBM,CD4050BC,CD4050BM

CD4049UBM CD4049UBC Hex Inverting Buffer CD4050BM CD4050BC Hex

Non-Inverting Buffer



Literature Number: SNOS364A



## CD4049UBM/CD4049UBC Hex Inverting Buffer CD4050BM/CD4050BC Hex Non-Inverting Buffer

#### **General Description**


These hex buffers are monolithic complementary MOS (CMOS) integrated circuits constructed with N- and P-channel enhancement mode transistors. These devices feature logic level conversion using only one supply voltage (V<sub>DD</sub>). The input signal high level (V<sub>IH</sub>) can exceed the V<sub>DD</sub> supply voltage when these devices are used for logic level conversions. These devices are intended for use as hex buffers, CMOS to DTL/TTL converters, or as CMOS current drivers, and at V<sub>DD</sub> = 5.0V, they can drive directly two DTL/TTL loads over the full operating temperature range.

#### Features

- Wide supply voltage range
- Direct drive to 2 TTL loads at 5.0V over full temperature range
- High source and sink current capability
- Special input protection permits input voltages greater than V<sub>DD</sub>

### Applications

- CMOS hex inverter/buffer
- CMOS to DTL/TTL hex converter
- CMOS current "sink" or "source" driver
- CMOS high-to-low logic level converter

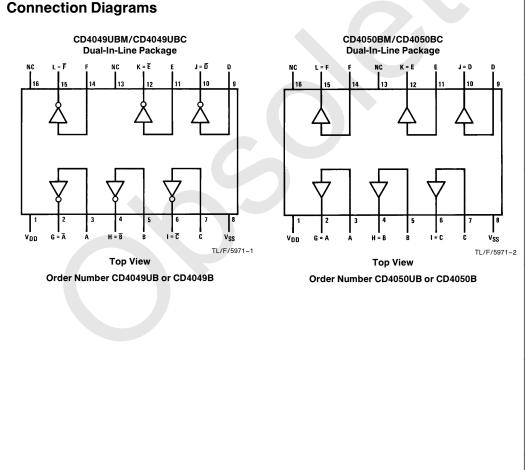

CD4049UBM/CD4049UBC Hex Inverting Buffer CD4050BM/CD4050BC Hex Non-Inverting Buffer

March 1988

3.0V to 15V

©1995 National Semiconductor Corporation TL/F/5971

RRD-B30M105/Printed in U. S. A.

#### Absolute Maximum Ratings (Notes 1 & 2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (V <sub>DD</sub> )	-0.5V to $+18V$
Input Voltage (V <sub>IN</sub> )	-0.5V to $+18V$
Voltage at Any Output Pin (V <sub>OUT</sub> )	$-0.5V$ to $V_{\mbox{DD}}$ $+$ 0.5V
Storage Temperature Range (T <sub>S</sub> )	-65°C to +150°C
Power Dissipation (P <sub>D</sub> )	
Dual-In-Line	700 mW
Small Outline	500 mW
Lead Temperature (TL)	
(Soldering, 10 seconds)	260°C

### **Recommended Operating**

Conditions (Note 2)	C
Supply Voltage (V <sub>DD</sub> )	3V to 15V
Input Voltage (V <sub>IN</sub> )	0V to 15V
Voltage at Any Output Pin (V <sub>OUT</sub> )	0 to V <sub>DD</sub>
Operating Temperature Range (T <sub>A</sub> )	
CD4049UBM, CD4050BM	-55°C to +125°C
CD4049UBC, CD4050BC	-40°C to +85°C

### DC Electrical Characteristics CD4049M/CD4050BM (Note 2)

Symbol	Parameter	Conditions	- 55°C			+ 25°C		+ 125°C		Units
Symbol	Farameter	Conditions	Min	Max	Min	Тур	Max	Min	Max	Unite
I <sub>DD</sub>	Quiescent Device Current	$V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		1.0 2.0 4.0		0.01 0.01 0.03	1.0 2.0 4.0		30 60 120	μΑ μΑ μΑ
V <sub>OL</sub>	Low Level Output Voltage	$ \begin{split} & V_{IH} = V_{DD}, V_{IL} = 0V, \\ &  I_0  < 1 \; \mu A \\ & V_{DD} = 5V \\ & V_{DD} = 10V \\ & V_{DD} = 15V \end{split} $		0.05 0.05 0.05		0 0 0	0.05 0.05 0.05		0.05 0.05 0.05	V V V
V <sub>OH</sub>	High Level Output Voltage	$ \begin{split} V_{IH} &= V_{DD}, V_{IL} = 0V, \\ & I_{O}  < 1 \; \mu A \\ &V_{DD} = 5V \\ &V_{DD} = 10V \\ &V_{DD} = 15V \end{split} $	4.95 9.95 14.95		4.95 9.95 14.95	5 10 15		4.95 9.95 14.95		V V V
VIL	Low Level Input Voltage (CD4050BM Only)	$\begin{split} & I_{O}  < 1 \; \mu A \\ &V_{DD} = 5V,  V_{O} = 0.5V \\ &V_{DD} = 10V,  V_{O} = 1V \\ &V_{DD} = 15V,  V_{O} = 1.5V \end{split}$		1.5 3.0 4.0		2.25 4.5 6.75	1.5 3.0 4.0		1.5 3.0 4.0	V V V
V <sub>IL</sub>	Low Level Input Voltage (CD4049UBM Only)	$\begin{split}  I_{O}  &< 1 \; \mu A \\ V_{DD} &= 5V,  V_{O} = 4.5V \\ V_{DD} &= 10V,  V_{O} = 9V \\ V_{DD} &= 15V,  V_{O} = 13.5V \end{split}$		1.0 2.0 3.0		1.5 2.5 3.5	1.0 2.0 3.0		1.0 2.0 3.0	V V V
V <sub>IH</sub>	High Level Input Voltage (CD4050BM Only)	$\begin{split}  I_{O}  &< 1 \; \mu A \\ V_{DD} &= 5V,  V_{O} = 4.5V \\ V_{DD} &= 10V,  V_{O} = 9V \\ V_{DD} &= 15V,  V_{O} = 13.5V \end{split}$	3.5 7.0 11.0		3.5 7.0 11.0	2.75 5.5 8.25		3.5 7.0 11.0		V V V
V <sub>IH</sub>	High Level Input Voltage (CD4049UBM Only)	$\begin{split}  I_O  &< 1 \; \mu A \\ V_{DD} &= 5 V,  V_O = 0.5 V \\ V_{DD} &= 10 V,  V_O = 1 V \\ V_{DD} &= 15 V,  V_O = 1.5 V \end{split}$	4.0 8.0 12.0		4.0 8.0 12.0	3.5 7.5 11.5		4.0 8.0 12.0		> > >
I <sub>OL</sub>	Low Level Output Current (Note 3) Absolute Maximum Ratings'' are those	$\begin{split} V_{IH} &= V_{DD}, V_{IL} = 0V \\ V_{DD} &= 5V, V_O = 0.4V \\ V_{DD} &= 10V, V_O = 0.5V \\ V_{DD} &= 15V, V_O = 1.5V \end{split}$	5.6 12 35		4.6 9.8 29	5 12 40		3.2 6.8 20		mA mA mA

Note 1: Absolute maximum natings are mose values beyond which the safety of the device cannot be guaranteed; they are not meant to imply that the devices should be operated at these limits. The table of "Recommended Operating Conditions" and "Electrical Characteristics" provides conditions for actual device operation.

Note 2:  $V_{\mbox{SS}}$  = 0V unless otherwise specified.

Note 3: These are *peak* output current capabilities. Continuous output current is rated at 12 mA maximum. The output current should not be allowed to exceed this value for extended periods of time. I<sub>OL</sub> and I<sub>OH</sub> are tested one output at a time.

DC E	DC Electrical Characteristics CD4049M/CD4050BM (Note 2) (Continued)										
Symbol	nbol Parameter	Conditions		-55°C		-55°C +25°C			+ 12	5°C	Units
Cymbol		Conditions	Min	Max	Min	Тур	Мах	Min	Мах	Onits	
I <sub>OH</sub>	High Level Output Current										
	(Note 3)	$V_{DD} = 5V, V_{O} = 4.6V$	-1.3		-1.1	-1.6		-0.72		mA	
		$V_{DD} = 10V, V_{O} = 9.5V$	-2.6		-2.2	-3.6		-1.5		mA	
		$V_{DD} = 15V, V_O = 13.5V$	-8.0		-7.2	-12		-5.0		mA	
I <sub>IN</sub>	Input Current	$V_{DD} = 15V, V_{IN} = 0V$ $V_{DD} = 15V, V_{IN} = 15V$		-0.1		-10-5	-0.1		-1.0	μA	
		$V_{DD} = 15V, V_{IN} = 15V$		0.1		10-5	0.1		1.0	μΑ	

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed; they are not meant to imply that the devices should be operated at these limits. The table of "Recommended Operating Conditions" and "Electrical Characteristics" provides conditions for actual device operation.

Note 2:  $V_{SS} = 0V$  unless otherwise specified.

Note 3: These are *peak* output current capabilities. Continuous output current is rated at 12 mA maximum. The output current should not be allowed to exceed this value for extended periods of time. I<sub>OL</sub> and I<sub>OH</sub> are tested one output at a time.

Symbol	Parameter	Conditions	-40°C			+ 25°C		+ 85°C		Units
Gymbol	rarameter	obhaidona	Min	Max	Min	Тур	Мах	Min	Мах	onita
I <sub>DD</sub>	Quiescent Device Current	$V_{DD} = 5V$ $V_{DD} = 10V$ $V_{DD} = 15V$		4 8 16		0.03 0.05 0.07	4.0 8.0 16.0		30 60 120	μΑ μΑ μΑ
V <sub>OL</sub>	Low Level Output Voltage			0.05 0.05 0.05		0 0 0	0.05 0.05 0.05		0.05 0.05 0.05	v v v
V <sub>OH</sub>	High Level Output Voltage		4.95 9.95 14.95		4.95 9.95 14.95	5 10 15		4.95 9.95 14.95		v v v
V <sub>IL</sub>	Low Level Input Voltage (CD4050BC Only)	$\begin{split} & I_{O}  < 1 \; \mu A \\ &V_{DD} = 5V, V_{O} = 0.5V \\ &V_{DD} = 10V, V_{O} = 1V \\ &V_{DD} = 15V, V_{O} = 1.5V \end{split}$		1.5 3.0 4.0		2.25 4.5 6.75	1.5 3.0 4.0		1.5 3.0 4.0	V V V
V <sub>IL</sub>	Low Level Input Voltage (CD4049UBC Only)	$\begin{split}  I_{O}  &< 1 \; \mu A \\ V_{DD} &= 5V,  V_{O} = 4.5V \\ V_{DD} &= 10V,  V_{O} = 9V \\ V_{DD} &= 15V,  V_{O} = 13.5V \end{split}$		1.0 2.0 3.0		1.5 2.5 3.5	1.0 2.0 3.0		1.0 2.0 3.0	v v v
V <sub>IH</sub>	High Level Input Voltage (CD4050BC Only)	$\begin{split}  I_{O}  &< 1 \; \mu A \\ V_{DD} &= 5 V,  V_{O} = 4.5 V \\ V_{DD} &= 10 V,  V_{O} = 9 V \\ V_{DD} &= 15 V,  V_{O} = 13.5 V \end{split}$	3.5 7.0 11.0		3.5 7.0 11.0	2.75 5.5 8.25		3.5 7.0 11.0		v v v
VIH	High Level Input Voltage (CD4049UBC Only)	$\begin{split} & I_{O}  < 1 \; \mu A \\ &V_{DD} = 5V,  V_{O} = 0.5V \\ &V_{DD} = 10V,  V_{O} = 1V \\ &V_{DD} = 15V,  V_{O} = 1.5V \end{split}$	4.0 8.0 12.0		4.0 8.0 12.0	3.5 7.5 11.5		4.0 8.0 12.0		V V V

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed; they are not meant to imply that the devices should be operated at these limits. The table of "Recommended Operating Conditions" and "Electrical Characteristics" provides conditions for actual device operation.

Note 2:  $V_{\mbox{SS}}\,=\,$  0V unless otherwise specified.

Note 3: These are peak output current capabilities. Continuous output current is rated at 12 mA maximum. The output current should not be allowed to exceed this value for extended periods of time.  $I_{\mbox{OL}}$  and  $I_{\mbox{OH}}$  are tested one output at a time.

Symbol	Parameter	Conditions	-4	0°C	+ 25°C			+ 85°C		Units
Symbol	Farameter	Conditions N		Max	Min	Тур	Max	Min	Max	Onits
IOL	Low Level Output Current	$V_{IH} = V_{DD}, V_{IL} = 0V$								
	(Note 3)	$V_{DD} = 5V, V_{O} = 0.4V$	4.6		4.0	5		3.2		mA
		$V_{DD} = 10V, V_{O} = 0.5V$	9.8		8.5	12		6.8		mA
		$V_{DD} = 15V, V_O = 1.5V$	29		25	40		20		mA
IOH	High Level Output Current	$V_{IH} = V_{DD}, V_{II} = 0V$								
011	(Note 3)	$V_{DD} = 5V, V_{O} = 4.6V$	-1.0		-0.9	-1.6		-0.72		mA
		$V_{DD} = 10V, V_{O} = 9.5V$	-2.1		-1.9	-3.6		-1.5		mA
		$V_{DD} = 15V, V_{O} = 13.5V$	-7.1		-6.2	-12		-5		mA
IIN	Input Current	$V_{DD} = 15V, V_{IN} = 0V$	-0.3		-0.3	-10-5			-1.0	μA
	-	$V_{DD} = 15V, V_{IN} = 15V$	0.3		0.3	10-5			1.0	μΑ

### AC Electrical Characteristics\* CD4049UBM/CD4049UBC

 $T_A$  = 25°C,  $C_L$  = 50 pF,  $R_L$  = 200k,  $t_r$  =  $t_f$  = 20 ns, unless otherwise specified

Symbol	Parameter	Conditions	Min	Тур	Max	Units
t <sub>PHL</sub>	Propagation Delay Time	$V_{DD} = 5V$		30	65	ns
	High-to-Low Level	$V_{DD} = 10V$		20	40	ns
		$V_{DD} = 15V$		15	30	ns
t <sub>PLH</sub>	Propagation Delay Time	$V_{DD} = 5V$		45	85	ns
	Low-to-High Level	$V_{DD} = 10V$		25	45	ns
		$V_{DD} = 15V$		20	35	ns
t <sub>THL</sub>	Transition Time	$V_{DD} = 5V$		30	60	ns
	High-to-Low Level	$V_{DD} = 10V$		20	40	ns
		$V_{DD} = 15V$		15	30	ns
t <sub>TLH</sub>	Transition Time	$V_{DD} = 5V$		60	120	ns
	Low-to-High Level	$V_{DD} = 10V$		30	55	ns
		$V_{DD} = 15V$		25	45	ns
C <sub>IN</sub>	Input Capacitance	Any Input		15	22.5	pF


\*AC Parameters are guaranteed by DC correlated testing.


### AC Electrical Characteristics\* CD4050BM/CD4050BC

 $T_A$  = 25°C,  $C_L$  = 50 pF,  $R_L$  = 200k,  $t_r$  =  $t_f$  = 20 ns, unless otherwise specified

Symbol	Parameter	Conditions	Min	Тур	Max	Units
t <sub>PHL</sub>	Propagation Delay Time	$V_{DD} = 5V$		60	110	ns
	High-to-Low Level	$V_{DD} = 10V$		25	55	ns
		$V_{DD} = 15V$		20	30	ns
t <sub>PLH</sub>	Propagation Delay Time	$V_{DD} = 5V$		60	120	ns
	Low-to-High Level	$V_{DD} = 10V$		30	55	ns
		$V_{DD} = 15V$		25	45	ns
t <sub>THL</sub>	Transition Time	$V_{DD} = 5V$		30	60	ns
	High-to-Low Level	$V_{DD} = 10V$		20	40	ns
		$V_{DD} = 15V$		15	30	ns
t <sub>TLH</sub>	Transition Time	$V_{DD} = 5V$		60	120	ns
	Low-to-High Level	$V_{DD} = 10V$		30	55	ns
		$V_{DD} = 15V$		25	45	ns
C <sub>IN</sub>	Input Capacitance	Any Input		5	7.5	pF

4

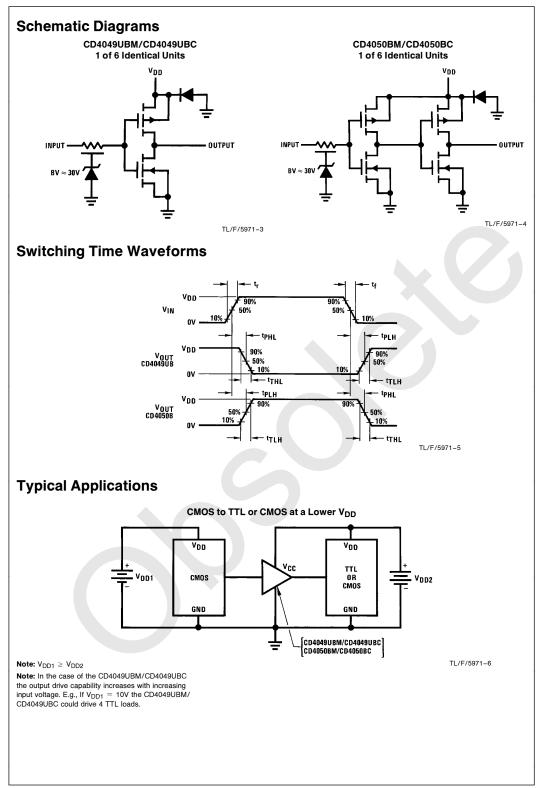

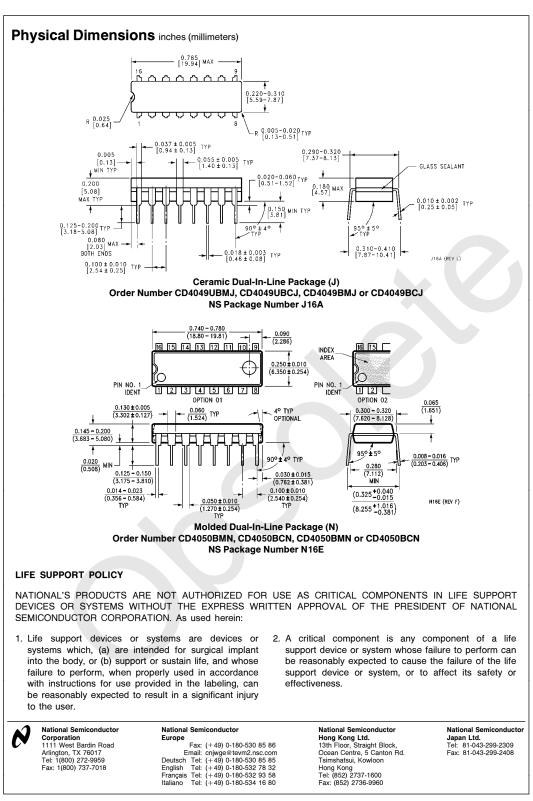

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications

#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Audio	www.ti.com/audio	Communications and Telecom	www.ti.com/communications
Amplifiers	amplifier.ti.com	Computers and Peripherals	www.ti.com/computers
Data Converters	dataconverter.ti.com	Consumer Electronics	www.ti.com/consumer-apps
DLP® Products	www.dlp.com	Energy and Lighting	www.ti.com/energy
DSP	dsp.ti.com	Industrial	www.ti.com/industrial
Clocks and Timers	www.ti.com/clocks	Medical	www.ti.com/medical
Interface	interface.ti.com	Security	www.ti.com/security
Logic	logic.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Power Mgmt	power.ti.com	Transportation and Automotive	www.ti.com/automotive
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Mobile Processors	www.ti.com/omap		
Wireless Connectivity	www.ti.com/wirelessconnectivity		
		u Hama Dawa	a O a Al a a m

**TI E2E Community Home Page** 

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2011, Texas Instruments Incorporated