
July 2011



BD433/435/437 NPN Epitaxial Silicon Transistor

Features

- Medium Power Linear and Switching Applications
- Complement to BD434, BD436 and BD438 respectively



Ordering Information

Part Number	Marking	Package	Packing Method	Remarks
BD433S	BD433	TO-126	BULK	
BD435S	BD435	TO-126	BULK	
BD435STU	BD435	TO-126	RAIL	
BD437S	BD437	TO-126	BULK	

* The suffix "S" of FSID denotes TO126 package.


Absolute Maximum Ratings $T_A = 25^{\circ}C$ unless otherwise noted

Symbol	Parameter	Value	Units	
V _{CBO}	Collector-Base Voltage			
	: BD433	22	V	
	: BD435	32	V	
	: BD437	45	V	
V _{CES}	Collector-Emitter Voltage			
	: BD433	22	V	
	: BD435	32	V	
	: BD437	45	V	
V _{CEO}	Collector-Emitter Voltage			
	: BD433	22	V	
	: BD435	32	V	
	: BD437	45	V	
V _{EBO}	Emitter-Base Voltage	5	V	
۱ _C	Collector Current (DC)	4	А	
I _{CP}	*Collector Current (Pulse)	7	A	
I _B	Base Current	1	A	
P _C	Collector Dissipation ($T_C = 25^{\circ}C$)	36	W	
TJ	Junction Temperature	150	°C	
T _{STG}	Storage Temperature	- 65 to 150	°C	

© 2011 Fairchild Semiconductor Corporation BD433/435/437 Rev. B0


Symbol	Parameter	Test Condition	Min.	Тур.	Max. 100 100 100 100 100 100	Units V V μA μA μA μA
V _{CEO} (sus)	Collector-Emitter Sustaining Voltage : BD433 : BD435 : BD437	$I_{\rm C} = 100 {\rm mA}, I_{\rm B} = 0$	22 32 45			
I _{CBO}	Collector Cut-off Current : BD433 : BD435 : BD437	$V_{CB} = 22V, I_E = 0$ $V_{CB} = 32V, I_E = 0$ $V_{CB} = 45V, I_E = 0$				
I _{CEO}	Collector Cut-off Current : BD433 : BD435 : BD437	$V_{CE} = 22V, V_{BE} = 0$ $V_{CE} = 32V, V_{BE} = 0$ $V_{CE} = 45V, V_{BE} = 0$				
I _{EBO}	Emitter Cut-off Current	$V_{EB} = 5V, I_{C} = 0$			1	mA
h _{FE}	* DC Current Gain : BD433/435 : BD437 : ALL DEVICE : BD433/435 : BD437	$V_{CE} = 5V, I_{C} = 10mA$ $V_{CE} = 1V, I_{C} = 500mA$ $V_{CE} = 1V, I_{C} = 2A$	40 30 85 50 40	130 130 140		
V _{CE} (sat)	* Collector-Emitter Saturation Volt- age : BD433 : BD435 : BD437	$I_{\rm C} = 2$ A, $I_{\rm B} = 0.2$ A		0.2 0.2 0.2	0.5 0.5 0.6	V V V
V _{BE} (on)	* Base-Emitter ON Voltage : BD433 : BD435 : BD437	$V_{CE} = 1V, I_{C} = 2A$			1.1 1.1 1.2	V V V
f _T	Current Gain Bandwidth Product	V _{CE} = 1V, I _C = 250mA	3			MH

Pulse Test: PW \leq 300µs, duty Cycle \leq 1.5% Pulsed

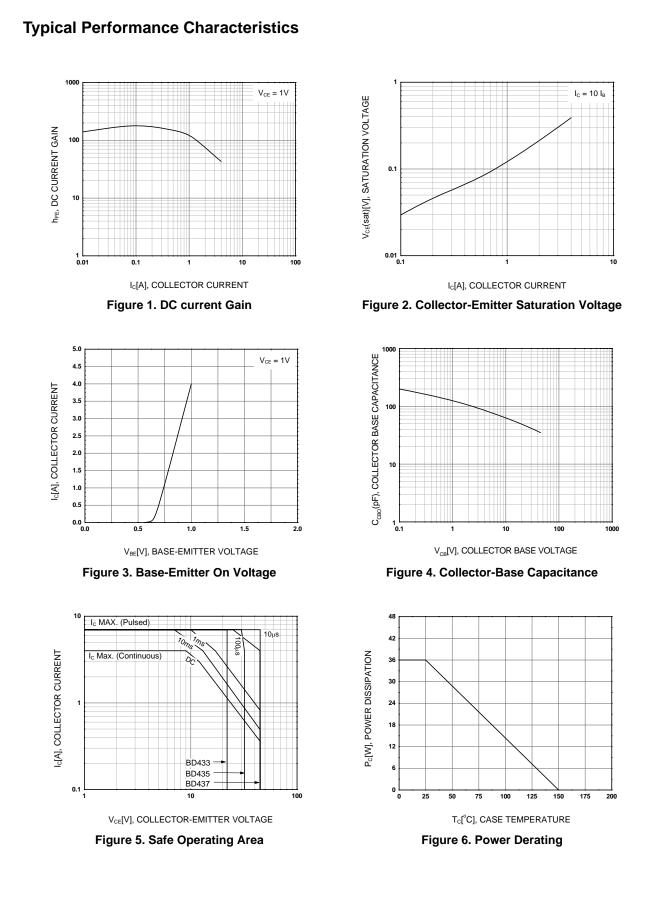

3

www.fairchildsemi.com

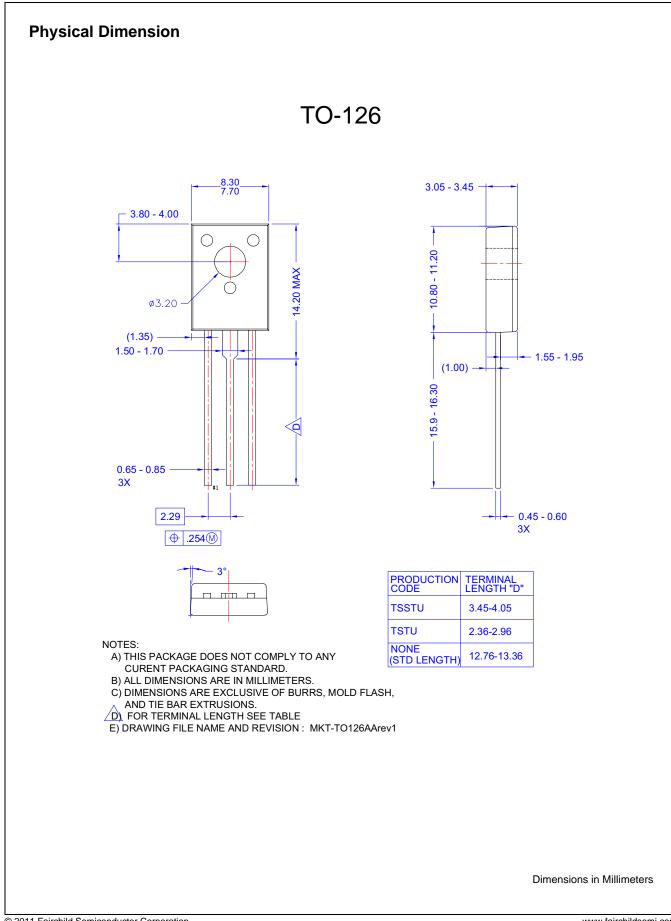

4

BD433/435/437 — NPN Epitaxial Silicon Transistor

FAIRCHILD

SEMICONDUCTOR®

TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

FPS™ AccuPower™ Auto-SPM™ F-PFS™ AX-CAP™* FRFET® Global Power Resource[™] **BitSiC**® Build it Now™ Green FPS™ Green FPS™ e-Series™ CorePLUS™ CorePOWER™ CROSSVOLT™ CTL™ Current Transfer Logic™ DEUXPEED[®] Dual Cool^{TI} EcoSPARK[®] EfficientMax™ ESBC™ F® Fairchild® Fairchild Semiconductor® FACT Quiet Series™ FACT FAST® FastvCore™ FFTBench™ FlashWriter^{®*} PDP SPM™

Gmax™ GTO™ IntelliMAX™ ISOPLANAR™ MegaBuck™ MICROCOUPLER™ MicroFET™ MicroPak™ MicroPak2™ MillerDrive™ MotionMax™ Motion-SPM™ mWSaver™ OptoHiT™ **OPTOLOGIC[®] OPTOPLANAR**[®]

Power-SPM™ PowerTrench[®] PowerXS[™] Programmable Active Droop™ QFĔT QS™ Quiet Series™ RapidConfigure™ Saving our world, 1mW/W/kW at a time™ SignalWise™ SmartMax™ SMART START™ SPM® STEALTH™ SuperFET SuperSOT™-3 . SuperSOT™-6 SuperSOT™-8 SupreMOS® SvncFET™ Sync-Lock™ GENERAL ®*

Uwer p we franchise TinyBoost™ TinyBuck™ TinyCalc™ TinyLogic® **TINYOPTO™** TinyPower™ TinyPWM™ TinyWire™ TranSiC[®] TriFault Detect™ TRUECURRENT®*

The Power Franchise®

The Right Technology for Your Success™



UHC Ultra FRFET™ UniFET™ VCX™ VisualMax™ XS™

* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Product Status	Definition	
Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.	
First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.	
Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.	
Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.	
-	Formative / In Design First Production Full Production	

www.fairchildsemi.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fairchild Semiconductor: BD435S BD435STU