

December 2014

FCP190N60E / FCPF190N60E

N-Channel SuperFET® II Easy-Drive MOSFET

600 V, 20.6 A, 190 mΩ

Features


- 650 V @ T_J = 150°C
- Typ. $R_{DS(on)}$ = 160 m Ω
- Ultra Low Gate Charge (Typ. Q_q = 63 nC)
- Low Effective Output Capacitance (Typ. C_{oss(eff.)} = 178 pF)
- 100% Avalanche Tested
- · An Integrated Gate Resistor
- · RoHS Compliant

Applications


- · LCD / LED / PDP TV Lighting
- · Solar Inverter
- · AC-DC Power Supply

Description

SuperFET® II MOSFET is Fairchild Semiconductor's brand-new high voltage super-junction (SJ) MOSFET family that is utilizing charge balance technology for outstanding low on-resistance and lower gate charge performance. This technology is tailored to minimize conduction loss, provide superior switching performance, dv/dt rate and higher avalanche energy. Consequently, SuperFET II MOSFET easy-drive series offers slightly slower rise and fall times compared to the SuperFET II MOSFET series. Noted by the "E" part number suffix, this family helps manage EMI issues and allows for easier design implementation. For faster switching in applications where switching losses must be at an absolute minimum, please consider the SuperFET II MOSFET series.







MOSFET Maximum Ratings T_C = 25°C unless otherwise noted.

Symbol		Parameter		FCP190N60E	FCPF190N60E	Unit	
V_{DSS}	Drain to Source Voltage			6	00	V	
V	Cata to Source Voltage	- DC		±	20	V	
V _{GSS} Gate to Source Voltage		- AC (f > 1 Hz)		±	30	V	
	Drain Current	- Continuous (T _C = 25°C)		20.6 20.6*		^	
I _D Drain Current		- Continuous (T _C = 100°C)		13.1	13.1*	Α	
I _{DM}	Drain Current	- Pulsed	(Note 1)	61.8	61.8*	Α	
E _{AS}	Single Pulsed Avalanche Energy (Note 2)		(Note 2)	400		mJ	
I _{AR}	Avalanche Current		(Note 1)	4.0		Α	
E _{AR}	Repetitive Avalanche Energy		(Note 1)	2.1		mJ	
dv/dt	MOSFET dv/dt			1	00	1//20	
av/at	Peak Diode Recovery dv/dt		(Note 3)	20		V/ns	
D	Dower Dissinction	$(T_C = 25^{\circ}C)$		208	39	W	
P_D	Power Dissipation - Derate Above 25°C			1.67	0.31	W/°C	
T _J , T _{STG}	Operating and Storage Temperature Range		-55 to	+150	°C		
TL	Maximum Lead Temperature for	or Soldering, 1/8" from Case for	5 Seconds	3	00	°С	

*Drain current limited by maximum junction temperature. Thermal Characteristics

Symbol	Parameter	FCP190N60E	FCPF190N60E	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case, Max.	0.6	3.2	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient, Max.	62.5	62.5	C/VV

Package Marking and Ordering Information

Part Number	Top Mark	Package	Packing Method	Reel Size	Tape Width	Quantity
FCP190N60E	FCP190N60E	TO-220	Tube	N/A	N/A	50 units
FCPF190N60E	FCPF190N60E	TO-220F	Tube	N/A	N/A	50 units

Test Conditions

Min.

Тур.

Max.

Unit

Electrical Characteristics $T_C = 25^{\circ}C$ unless otherwise noted.

Parameter

Off Chara	acteristics					
BV _{DSS}	Drain to Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = 10 \text{ mA}, T_J = 25^{\circ}\text{C}$	600	-	-	V
		$V_{GS} = 0 \text{ V}, I_D = 10 \text{ mA}, T_J = 150^{\circ}\text{C}$	650	-	-	V
ΔBV _{DSS} / ΔT _J	Breakdown Voltage Temperature Coefficient	I _D = 10 mA, Referenced to 25°C	-	0.67	-	V/°C
BV _{DS}	Drain to Source Avalanche Breakdown Voltage	V _{GS} = 0 V, I _D = 20 A	-	700	-	V
ı	Zoro Cata Voltago Drain Current	V _{DS} = 600 V, V _{GS} = 0 V	-	-	1	^
I _{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 480 \text{ V}, T_{C} = 125^{\circ}\text{C}$	-	2.8	-	μΑ
I _{GSS}	Gate to Body Leakage Current	V _{GS} = ±20 V, V _{DS} = 0 V	-	-	±100	nA

On Characteristics

Symbol

V _{GS(th)}	Gate Threshold Voltage	$V_{GS} = V_{DS}, I_{D} = 250 \mu A$	2.5	-	3.5	V
R _{DS(on)}	Static Drain to Source On Resistance	$V_{GS} = 10 \text{ V}, I_D = 10 \text{ A}$	-	0.16	0.19	Ω
9 _{FS}	Forward Transconductance	$V_{DS} = 20 \text{ V}, I_{D} = 10 \text{ A}$	-\	20	-	S

Dynamic Characteristics

C _{iss}	Input Capacitance	.,	-	2385	3175	pF
C _{oss}	Output Capacitance	V _{DS} = 25 V, V _{GS} = 0 V, f = 1 MHz	-	1795	2396	pF
C _{rss}	Reverse Transfer Capacitance	1 - 1 1011 12		110	165	pF
C _{oss}	Output Capacitance	V _{DS} = 380 V, V _{GS} = 0 V, f = 1 MHz	-	42	-	pF
C _{oss(eff.)}	Effective Output Capacitance	$V_{DS} = 0 \text{ V to } 480 \text{ V}, V_{GS} = 0 \text{ V}$	-	178	-	pF
Q _{g(tot)}	Total Gate Charge at 10V	V _{DS} = 380 V, I _D = 10 A,	-	63	82	nC
Q_{gs}	Gate to Source Gate Charge	V _{GS} = 10 V	-	10	-	nC
Q_{gd}	Gate to Drain "Miller" Charge	(Note 4)	- /	24	-	nC
ESR	Equivalent Series Resistance	f = 1 MHz	- /	5	-	Ω

Switching Characteristics

t _{d(on)}	Turn-On Delay Time		/ -	23	56	ns
t _r	Turn-On Rise Time	$V_{DD} = 380 \text{ V}, I_{D} = 10 \text{ A},$	-	14	38	ns
t _{d(off)}	Turn-Off Delay Time	$V_{GS} = 10 \text{ V}, R_G = 4.7 \Omega$	-	101	212	ns
t _f	Turn-Off Fall Time	(Note 4)	-	15	40	ns

Drain-Source Diode Characteristics

I _S	Maximum Continuous Drain to Source Diode Forward Current		-	-	20.2	Α
I _{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	60.6	Α
V_{SD}	Drain to Source Diode Forward Voltage	V _{GS} = 0 V, I _{SD} = 10 A	-	-	1.2	V
t _{rr}	Reverse Recovery Time	V _{GS} = 0 V, I _{SD} = 10 A,	-	308	-	ns
Q_{rr}	Reverse Recovery Charge	$dI_F/dt = 100 A/\mu s$	-	4.8	-	μС

Notes

- ${\it 1. Repetitive\ rating: pulse-width\ limited\ by\ maximum\ junction\ temperature.}$
- 2. I_{AS} = 4 A, V_{DD} = 50 V, R_G = 25 Ω , starting T_J = 25°C.
- 3. I $_{SD} \leq$ 10 A, di/dt \leq 200 A/µs, V $_{DD} \leq$ BV $_{DSS}$, starting T $_{J}$ = 25°C.
- 4. Essentially independent of operating temperature typical characteristics.

Typical Performance Characteristics

Figure 1. On-Region Characteristics




Figure 3. On-Resistance Variation vs.

Drain Current and Gate Voltage




Figure 5. Capacitance Characteristics




Figure 2. Transfer Characteristics




Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature





Figure 6. Gate Charge Characteristics



Typical Performance Characteristics (Continued)

Figure 7. Breakdown Voltage Variation vs. Temperature




Figure 9. Maximum Safe Operating Area for FCP190N60E




Figure 11. Maximum Drain Current vs. Case Temperature




Figure 8. On-Resistance Variation vs. Temperature




Figure 10. Maximum Safe Operating Area for FCPF190N60E





Figure 12. Eoss vs. Drain to Source Voltage



Typical Performance Characteristics (Continued)

Figure 13. Transient Thermal Response Curve for FCP190N60E

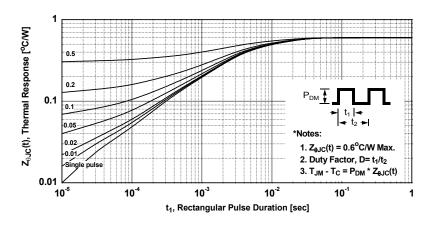
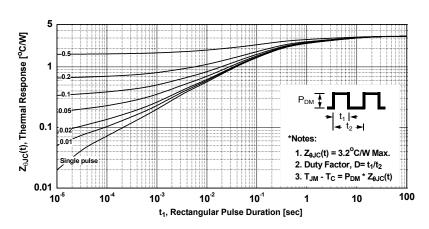


Figure 14. Transient Thermal Response Curve for FCPF190N60E



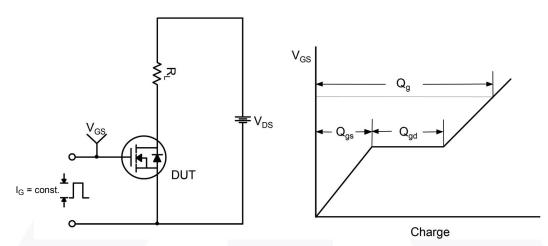


Figure 15. Gate Charge Test Circuit & Waveform

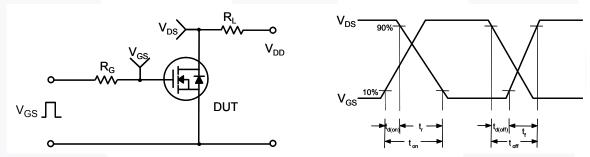


Figure 16. Resistive Switching Test Circuit & Waveforms

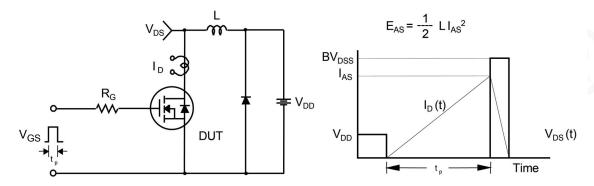


Figure 17. Unclamped Inductive Switching Test Circuit & Waveforms



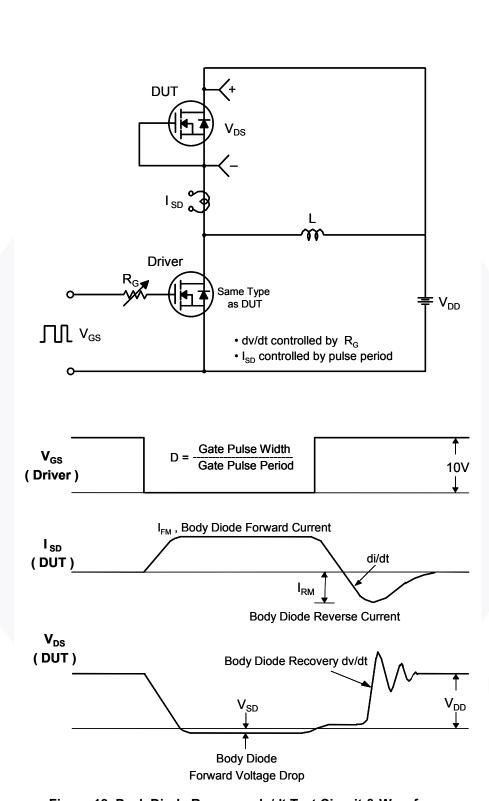


Figure 18. Peak Diode Recovery dv/dt Test Circuit & Waveforms





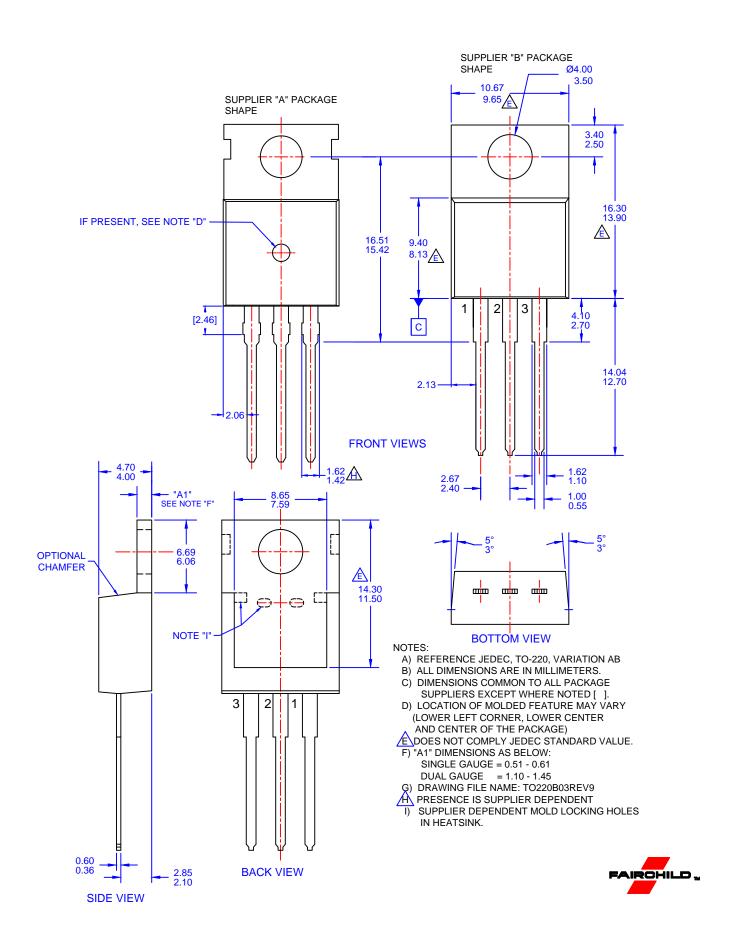

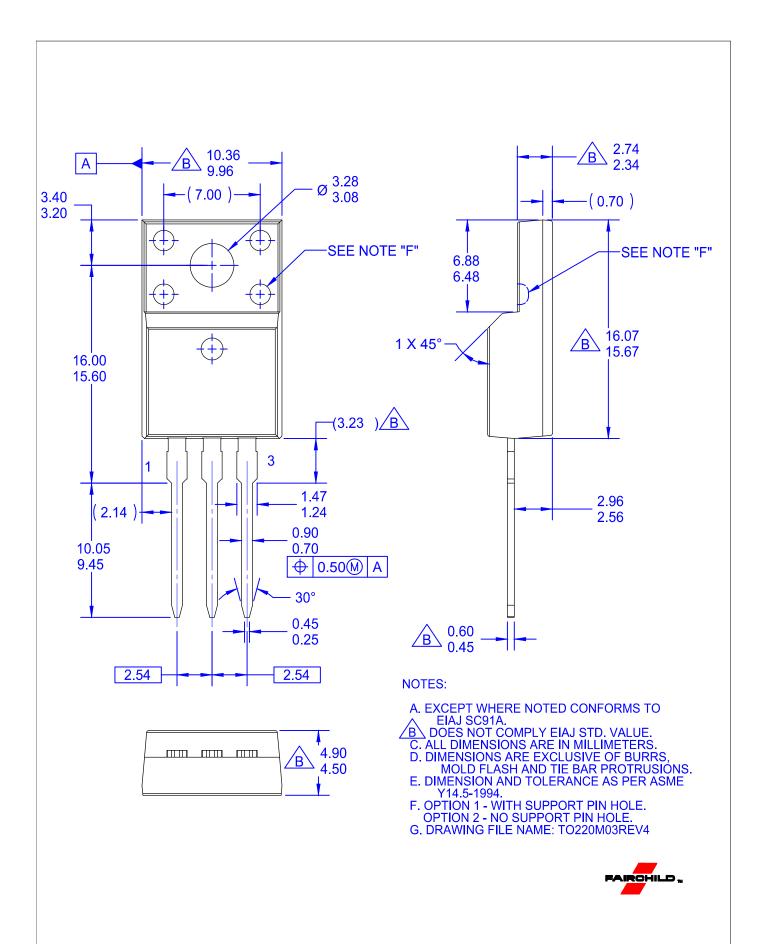

TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

 $\begin{array}{lll} \mathsf{AccuPower^{\mathsf{TM}}} & \mathsf{F-PFS^{\mathsf{TM}}} \\ \mathsf{AttitudeEngine^{\mathsf{TM}}} & \mathsf{FRFET}^{\texttt{®}} \end{array}$

Awinda[®] Global Power Resource SM

AX-CAP®* GreenBridge™
BitSiC™ Green FPS™
Build it Now™ Green FPS™ e-Series™

Current Transfer Logic™ Making Small Speakers Sound Louder

DEUXPEED® and Better™

Dual Cool™ MegaBuck™

EcoSPARK® MICROCOUPLER™

EfficientMax™ MicroFET™

EfficientMax™ MicroFET™
ESBC™ MicroPak™
MicroPak™
MicroPak2™
Fairchild® MillerDrive™
MotionMax™
Fairchild Semiconductor®

Farchild Semiconductor

FACT Quiet Series™
FACT®

FastvCore™
FETBench™
FPS™

MotionGrid®
MTI®
MTX®
MVN®
FETBench™
MVN®
FPS™

OptoHiT™
OPTOLOGIC®

OPTOPLANAR®

Power Supply WebDesigner™ PowerTrench®

PowerXS™

Programmable Active Droop™ OFFT®

QS™ Quiet Series™ RapidConfigure™

T TM

Saving our world, 1mW/W/kW at a time™

SignalWise™ SmartMax™ SMART START™

Solutions for Your Success™

SPM®
STEALTH™
SuperFET®
SuperSOT™-3
SuperSOT™-6
SuperSOT™-8
SupreMOS®
SyncFET™
Sync-Lock™

SYSTEM GENERAL®'
TinyBoost®
TinyBuck®
TinyCalc™
TinyLogic®
TINYOPTO™
TinyPower™
TinyPWM™
TinyPWM™
TranSiC™
TriFault Detect™
TRUECURRENT®**
uSerDes™

SerDes"
UHC[®]
Ultra FRFET™
UniFET™
VCX™
VisualMax™
VoltagePlus™
XS™
XS™
XS™

仙童®

* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT http://www.fairchildsemi.com, FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

AUTHORIZED USE

Unless otherwise specified in this data sheet, this product is a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability. This product may not be used in the following applications, unless specifically approved in writing by a Fairchild officer: (1) automotive or other transportation, (2) military/aerospace, (3) any safety critical application – including life critical medical equipment – where the failure of the Fairchild product reasonably would be expected to result in personal injury, death or property damage. Customer's use of this product is subject to agreement of this Authorized Use policy. In the event of an unauthorized use of Fairchild's product, Fairchild accepts no liability in the event of product failure. In other respects, this product shall be subject to Fairchild's Worldwide Terms and Conditions of Sale, unless a separate agreement has been signed by both Parties.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Terms of Use

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Deminition of Terms				
Datasheet Identification		Definition		
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.		
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.		
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.		

Rev. 177

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fairchild Semiconductor:

FCP190N60E