

December 2014

FCP260N60E / FCPF260N60E N-Channel SuperFET[®] II Easy-Drive MOSFET

600 V, 15 A, 260 m Ω

Features


- 650 V @ T_J = 150°C
- Typ. R_{DS(on)} = 220 mΩ
- Ultra Low Gate Charge (Typ. Q_q = 48 nC)
- Low Effective Output Capacitance (Typ. Coss(eff.) = 129 pF)
- 100% Avalanche Tested
- An Integrated Gate Resistor
- RoHS Compliant

Applications

- LCD / LED / PDP TV Lighting
- Solar Inverter
- AC-DC Power Supply

Description

SuperFET[®] II MOSFET is Fairchild Semiconductor's brand-new high voltage super-junction (SJ) MOSFET family that is utilizing charge balance technology for outstanding low on-resistance and lower gate charge performance. This technology is tailored to minimize conduction loss, provide superior switching performance, dv/dt rate and higher avalanche energy. Consequently, SuperFET II MOSFET easy-drive series offers slightly slower rise and fall times compared to the SuperFET II MOSFET series. Noted by the "E" part number suffix, this family helps manage EMI issues and allows for easier design implementation. For faster switching in applications where switching losses must be at an absolute minimum, please consider the Super-FET II MOSFET series.

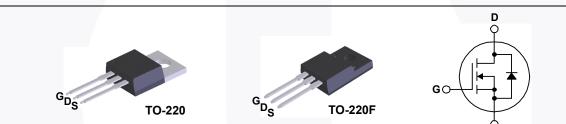


MOSFET Maximum Ratings T_C = 25°C unless otherwise noted.

Symbol		FCP260N60E	FCPF260N60E	Unit		
V _{DSS}	Drain to Source Voltage		6	V		
V _{GSS}	Cata ta Sauraa Valtaga	- DC	- DC		20	V
	Gate to Source Voltage	- AC	(f > 1 Hz)	±30		V
I _D	Drain Current	- Continuous (T _C = 25°C)		15	15*	Α
		- Continuous (T _C = 100 ^o C)		9.5	9.5*	A
I _{DM}	Drain Current	- Pulsed	45	45*	Α	
E _{AS}	Single Pulsed Avalanche Er	29	mJ			
I _{AR}	Avalanche Current	(Note 1)	3.0		Α	
E _{AR}	Repetitive Avalanche Energy			1.56		mJ
dv/dt	MOSFET dv/dt	1	V/ns			
	Peak Diode Recovery dv/dt (Note			20		
P _D	Dower Discipation	(T _C = 25 ^o C)		156	36	W
	Power Dissipation	- Derate Above 25°C		1.25	0.29	W/ºC
T _J , T _{STG}	Operating and Storage Tem	-55 te	°C			
ΤL	Maximum Lead Temperatur	3	°C			
Drain current	limited by maximum junction temp	perature	1			

Thermal Characteristics

Symbol	Parameter	FCP260N60E	FCPF260N60E	Unit
$R_{ ext{ heta}JC}$	Thermal Resistance, Junction to Case, Max.	0.8	3.5	°C/W
$R_{ hetaJA}$	Thermal Resistance, Junction to Ambient, Max.	62.5	62.5	°C/W

Part Number Top Mark P		Packag	ckage Packing Method Reel Siz		e	Tape Widt	h Qι	uantity			
		TO-22	0	Tube	N/A		N/A	50) units		
FCPF260N60E FCPF260N60E TC			TO-220	220F Tube N/A			N/A		50	50 units	
Electrica	I Char		C unless	otherwi	se noted.						
Symbol	nbol Parameter			Test Conditions			Min.	Тур.	Max.	Unit	
Off Charac	teristic	S									
BV _{DSS}	Drain to	Source Breakdown Voltage		$V_{GS} = 0 V, I_D = 10 mA, T_J = 25^{\circ}C$ $V_{GS} = 0 V, I_D = 10 mA, T_J = 150^{\circ}C$			600 650	-	-	v	
ΔΒV _{DSS} /ΔT _J		Breakdown Voltage Temperature Coefficient			$I_D = 10$ mA, Referenced to $25^{\circ}C$			0.67	-	V/ºC	
BV _{DS}	Drain to Voltage	Drain to Source Avalanche Breakdown			V _{GS} = 0 V, I _D = 15 A			700	-	V	
I _{DSS}	Zero Gate Voltage Drain Current			V _{DS} = 600 V, V _{GS} = 0 V			-	-	1	μA	
		,		50	$V, T_{C} = 125^{\circ}C$		-	2.6	-		
I _{GSS}	Gate to Body Leakage Current			/ _{GS} = ±2	0 V, V _{DS} = 0 V		-	-	±100	nA	
On Charac	teristic	S									
V _{GS(th)}	Gate Threshold Voltage			$V_{GS} = V_{DS}, I_{D} = 250 \ \mu A$			2.5	-	3.5	V	
R _{DS(on)}	Static Drain to Source On Resistance			V _{GS} = 10 V, I _D = 7.5 A			-	0.22	0.26	Ω	
9 _{FS}	Forward Transconductance			V _{DS} = 20 V, I _D = 7.5 A			-	15.5	-	S	
Dynamic C	haracte	eristics									
C _{iss}	-	apacitance					-	1880	2500	pF	
C _{oss}		out Capacitance erse Transfer Capacitance		$V_{\rm DS} = 25 \text{ V}, \text{ V}_{\rm GS} = 0 \text{ V},$		-	1330	1770	pF		
C _{rss}				f = 1 MHz			-	85	130	pF	
C _{oss}		Dutput Capacitance			V _{DS} = 380 V, V _{GS} = 0 V, f = 1 MHz			32	-	pF	
C _{oss(eff.)}		fective Output Capacitance		$V_{DS} = 0 V \text{ to } 480 V, V_{GS} = 0 V$			-	129	-	pF	
Q _{g(tot)}		Gate Charge at 10V		$V_{DS} = 380 \text{ V}, \text{ I}_{D} = 7.5 \text{ A},$ $V_{GS} = 10 \text{ V}$			-	48	62	nC	
Q _{gs}		o Source Gate Charge					-	7.4	-	nC	
Q _{gd}		to Drain "Miller" Charge		(Note 4)			-	17	-	nC	
ESR	-	ivalent Series Resistance		f = 1 MHz			-	5.8	-	Ω	
Switching	Charac	toristics				I					
t _{d(on)}	Turn-On Delay Time						1.	20	50	ns	
t _r		Turn-On Rise Time Turn-Off Delay Time		V _{DD} = 380 V, I _D = 7.5 A,			-	11	32	ns	
t _{d(off)}				$V_{GS} = 10 \text{ V}, \text{ R}_{G} = 4.7 \Omega$ (Note 4)		-	89	188	ns		
t _f Turn-Off Fall						-	13	36	ns		
						(1			
	1	le Characteristics			rd Curront				15	۸	
I _S	Maximum Continuous Drain to Source D Maximum Pulsed Drain to Source Diode						-	-	15 45	A	
I _{SM}	Drain to Source Diode Forward Voltage						-	-	45	A V	
V _{SD}				00 05			-	- 270	1.2		
$\frac{t_{rr}}{0}$	Reverse Recovery Time Reverse Recovery Charge			V _{GS} = 0 V, I _{SD} = 7.5 A, dI _F /dt = 100 A/μs					-	ns	
Q _{rr}	NEVEISE	Tecovery Charge	U		00 Αγμο		-	3.6	-	μC	
2. I _{AS} = 3 A, V _{DD} =	50 V, R _G = 2	limited by maximum junction tempe 5 Ω , starting T _J = 25°C. V _{DD} ≤ BV _{DSS} , starting T _J = 25°C.	erature.								

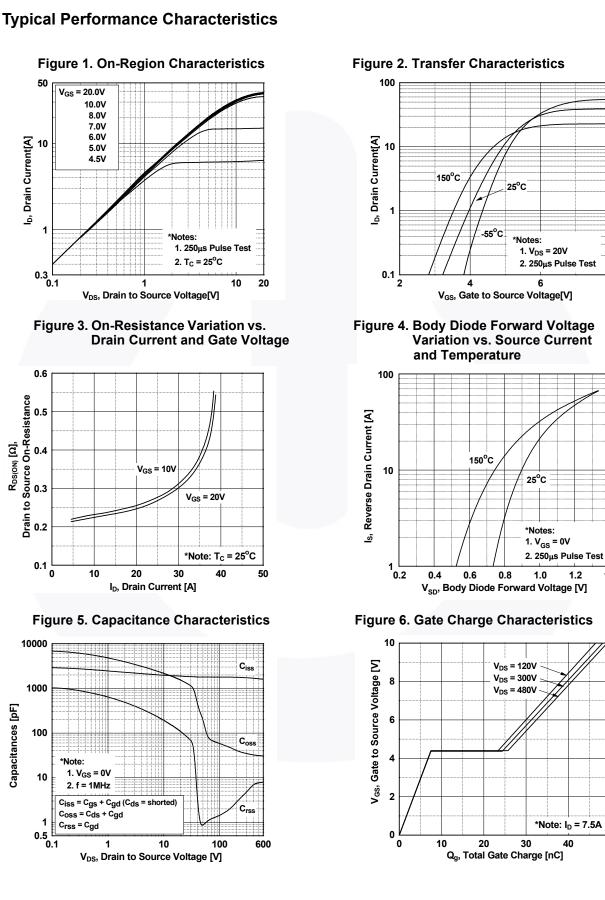


8

1.4


www.fairchildsemi.com

50

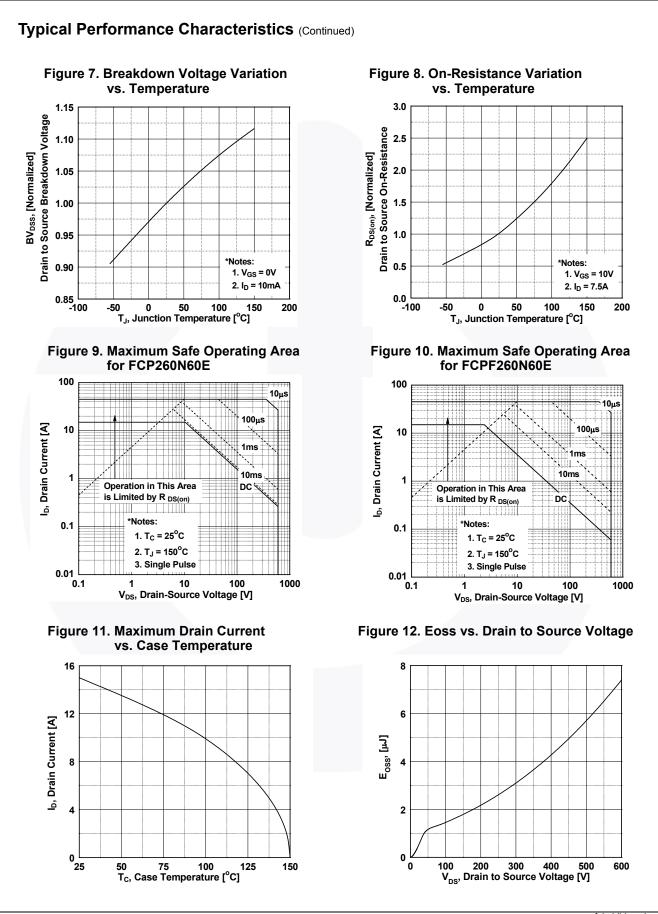


©2012 Fairchild Semiconductor Corporation FCP260N60E / FCPF260N60E Rev. C6 4

www.fairchildsemi.com

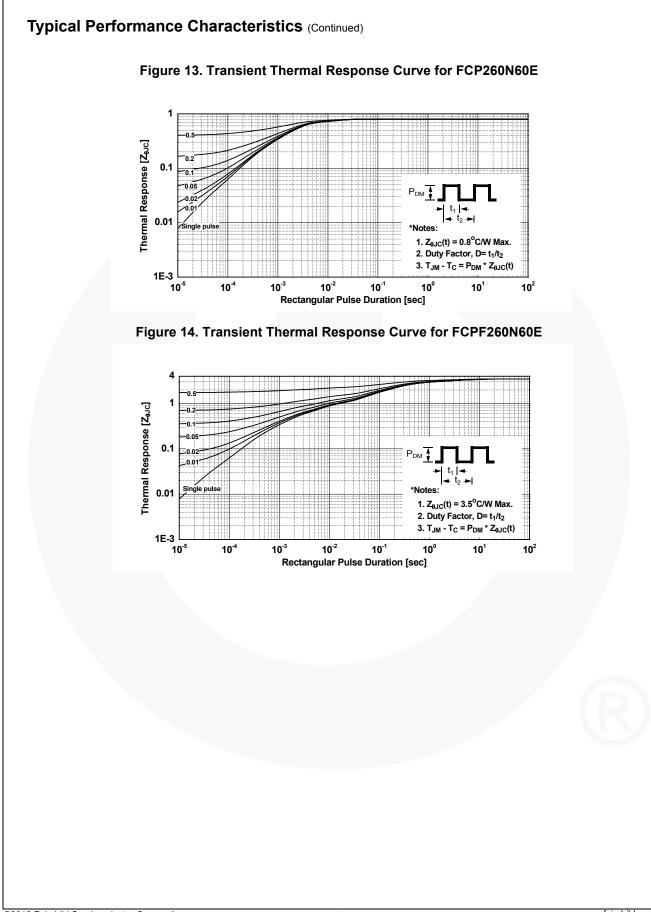



5

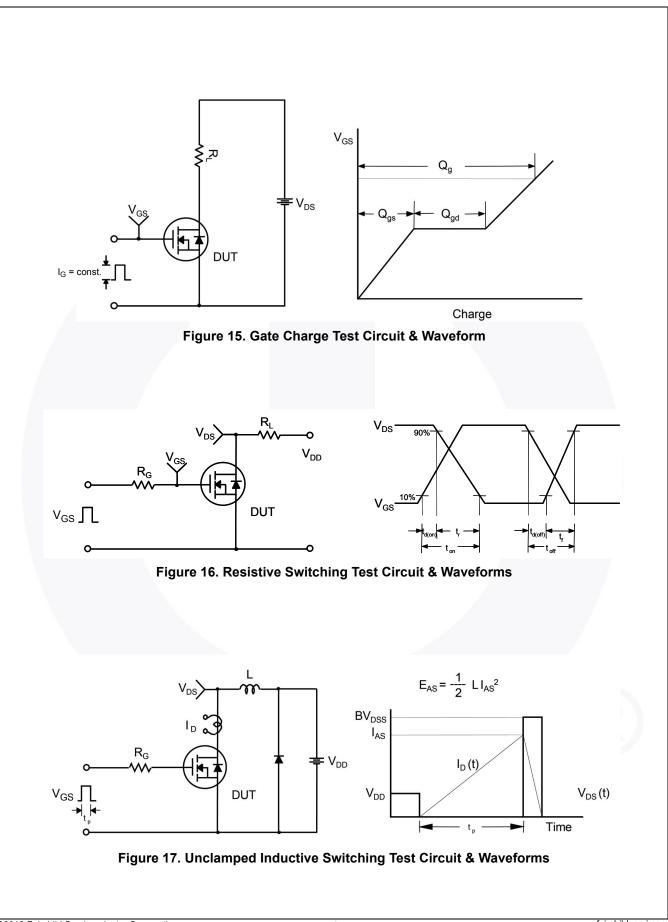


FCP260N60E / FCPF260N60E — N-Channel SuperFET[®] II Easy-Drive MOSFET

6

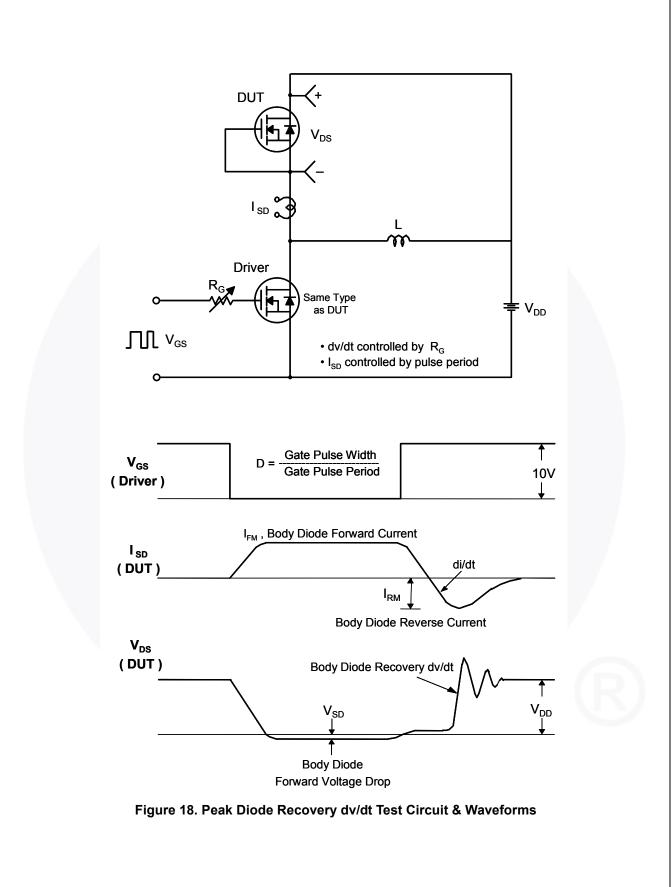

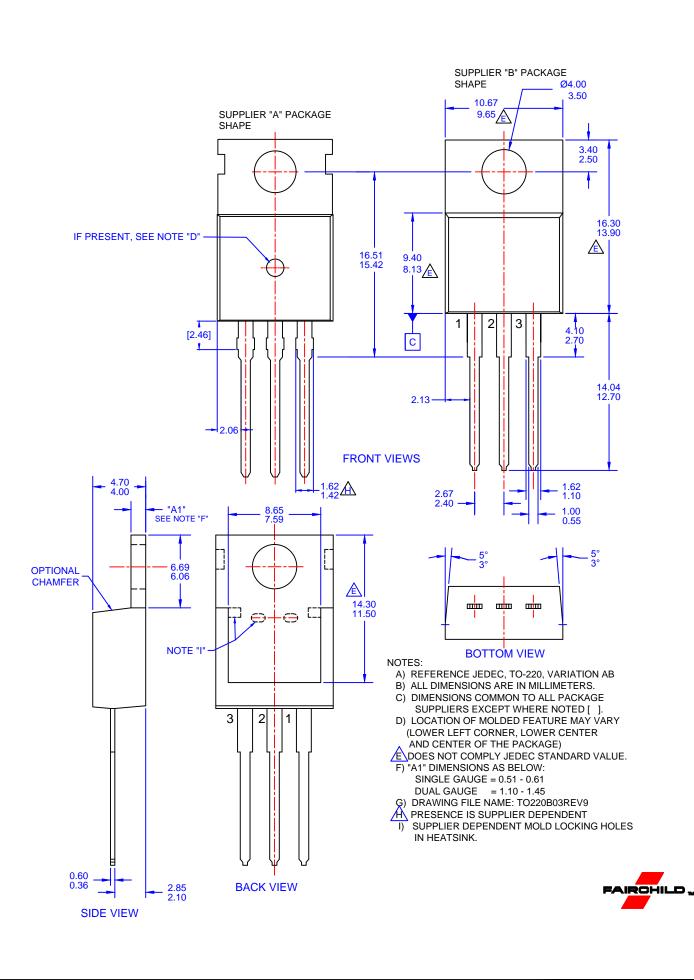

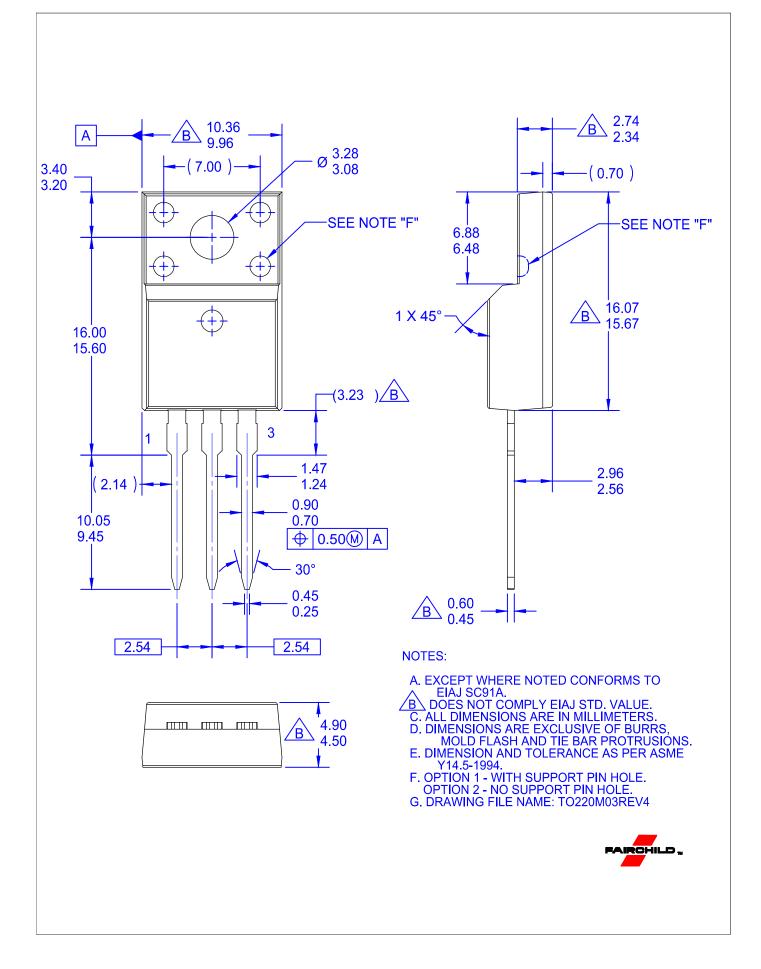



* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT <u>HTTP://WWW.FAIRCHILDSEMI.COM</u>, FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

AUTHORIZED USE

Unless otherwise specified in this data sheet, this product is a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability. This product may not be used in the following applications, unless specifically approved in writing by a Fairchild officer: (1) automotive or other transportation, (2) military/aerospace, (3) any safety critical application – including life critical medical equipment – where the failure of the Fairchild product reasonably would be expected to result in personal injury, death or property damage. Customer's use of this product is subject to agreement of this Authorized Use policy. In the event of an unauthorized use of Fairchild's product, Fairchild accepts no liability in the event of product failure. In other respects, this product shall be subject to Fairchild's Worldwide Terms and Conditions of Sale, unless a separate agreement has been signed by both Parties.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Terms of Use

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms							
Datasheet Identification	Product Status	Definition					
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.					
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.					
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.					
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.					

Rev. 177

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fairchild Semiconductor: FCP260N60E