

April 2014

FQA62N25C

N-Channel QFET® MOSFET


250 V, 62 A, 35 mΩ


Description

This N-Channel enhancement mode power MOSFET is produced using Fairchild Semiconductor's proprietary planar stripe and DMOS technology. This advanced MOSFET technology has been especially tailored to reduce on-state resistance, and to provide superior switching performance and high avalanche energy strength. These devices are suitable for switched mode power supplies, active power factor correction (PFC), and electronic lamp ballasts.

Features

- + 62 A, 250 V, $R_{DS(on)}$ = 35 m Ω (Max.) @ V_{GS} = 10 V, I_{D} = 31 A
- Low Gate Charge (Typ. 100 nC)
- Low Crss (Typ. 63.5 pF)
- 100% Avalanche Tested





Absolute Maximum Ratings T_C = 25°C unless otherwise noted.

Symbol	Parameter	FQA62N25C	Unit
V_{DSS}	Drain-Source Voltage	250	V
I _D	Drain Current - Continuous (T _C = 25°C)	62	Α
	- Continuous (T _C = 100°C)	39	Α
I _{DM}	Drain Current - Pulsed (Note 1)	248	Α
V_{GSS}	Gate-Source Voltage	± 30	V
E _{AS}	Single Pulsed Avalanche Energy (Note 2)	2300	mJ
I _{AR}	Avalanche Current (Note 1)	62	Α
E _{AR}	Repetitive Avalanche Energy (Note 1)	29.8	mJ
dv/dt	Peak Diode Recovery dv/dt (Note 3)	5.5	V/ns
P_D	Power Dissipation (T _C = 25°C)	298	W
	- Derate above 25°C	2.38	W/°C
T _J , T _{STG}	Operating and Storage Temperature Range	-55 to +150	°C
T _L	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	300	°C

Thermal Characteristics

Symbol	Parameter	FQA62N25C	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case, Max.	0.42	°C/W
R _{θCS} Thermal Resistance, Case-to-Sink, Typ.		0.24	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient, Max.	40	°C/W

Package Marking and Ordering Information

Part Number	Top Mark	Package	Packing Method	Reel Size	Tape Width	Quantity
FQA62N25C	FQA62N25C	TO-3PN	Tube	N/A	N/A	30 units

Electrical Characteristics T_c = 25°C unless otherwise noted.

Symbol	Parameter	Test Conditions		Тур.	Max.	Unit
Off Cha	aracteristics					
BV _{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$	250			V
ΔBV_{DSS} / ΔT_{J}	Breakdown Voltage Temperature Coefficient	I_D = 250 μ A, Referenced to 25°C		0.28		V/°C
I _{DSS}	Zana Cata Valtana Duain Comment	V _{DS} = 250 V, V _{GS} = 0 V			10	μА
Zero Gate Voltage Drain Current	V _{DS} = 200 V, T _C = 125°C			100	μА	
I _{GSSF}	Gate-Body Leakage Current, Forward	V _{GS} = 30 V, V _{DS} = 0 V			100	nΑ
I _{GSSR}	Gate-Body Leakage Current, Reverse	$V_{GS} = -30 \text{ V}, V_{DS} = 0 \text{ V}$			-100	nA
On Cha	racteristics					
V _{GS(th)}	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_{D} = 250 \mu A$	2.0		4.0	V
R _{DS(on)}	Static Drain-Source On-Resistance	V _{GS} = 10 V, I _D = 31 A		0.029	0.035	Ω
9 _{FS}	Forward Transconductance	V _{DS} = 40 V, I _D = 31 A		55		S
Dynam	ic Characteristics					
C _{iss}	Input Capacitance	V _{DS} = 25 V, V _{GS} = 0 V, f = 1.0 MHz		4830	6280	pF
C _{oss}	Output Capacitance			945	1230	pF
C _{rss}	Reverse Transfer Capacitance			63.5	83	pF
						ы
Switch	ing Characteristics					рі
	ing Characteristics Turn-On Delay Time	Von = 125 V In = 62 A		75	160	ns
Switch t _{d(on)} t _r		$V_{DD} = 125 \text{ V}, I_{D} = 62 \text{ A},$ $R_{C} = 25 \Omega$		75 395	160 800	
$t_{d(on)}$	Turn-On Delay Time	$R_G = 25 \Omega$				ns
$t_{d(on)}$ t_r $t_{d(off)}$	Turn-On Delay Time Turn-On Rise Time	00 . 0		395	800	ns
$t_{d(on)}$ t_r $t_{d(off)}$	Turn-On Delay Time Turn-On Rise Time Turn-Off Delay Time	$R_G = 25 \Omega$	 	395 245	800 500	ns ns
$\begin{array}{c} t_{d(on)} \\ t_{r} \\ \\ t_{d(off)} \\ \end{array}$	Turn-On Delay Time Turn-On Rise Time Turn-Off Delay Time Turn-Off Fall Time	$R_G = 25 \Omega$ (Note 4)		395 245 335	800 500 680	ns ns ns

Drain-Source Diode Characteristics and Maximum Ratings

I _S	Maximum Continuous Drain-Source Diode Forward Current				62	Α
I _{SM}	Maximum Pulsed Drain-Source Diode Forward Current				248	Α
V _{SD}	Drain-Source Diode Forward Voltage	V _{GS} = 0 V, I _S = 62 A	-		1.5	V
t _{rr}	Reverse Recovery Time	$V_{GS} = 0 \text{ V, } I_{S} = 62 \text{ A,}$	-	340		ns
Q _{rr}	Reverse Recovery Charge	dI _F / dt = 100 A/μs		4.77	/	μС

- **Notes:** 1. Repetitive rating: pulse-width limited by maximum junction temperature. 2. L = 0.96 mH, I_{AS} = 62 A, V_{DD} = 50 V, R_G = 25 Ω , starting T_J = 25°C. 3. $I_{SD} \le$ 62 A, di/dt \le 300 A/ μ s, $V_{DD} \le$ BV $_{DSS}$, starting T_J = 25°C. 4. Essentially independent of operating temperature.

Typical Performance Characteristics

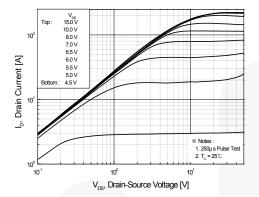


Figure 1. On-Region Characteristics

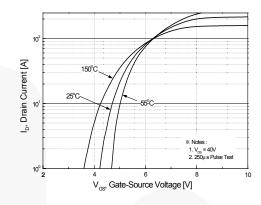


Figure 2. Transfer Characteristics

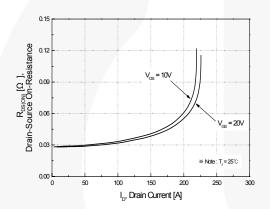


Figure 3. On-Resistance Variation vs Drain Current and Gate Voltage

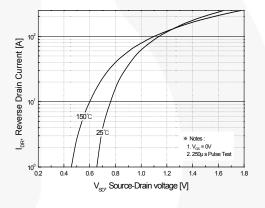


Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature

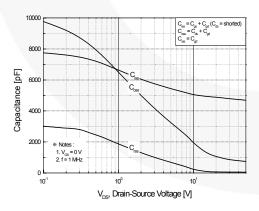


Figure 5. Capacitance Characteristics

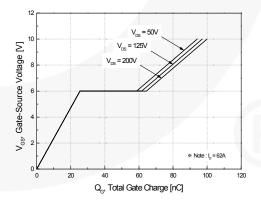


Figure 6. Gate Charge Characteristics

Typical Performance Characteristics (Continued)

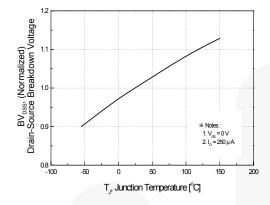


Figure 7. Breakdown Voltage Variation vs Temperature

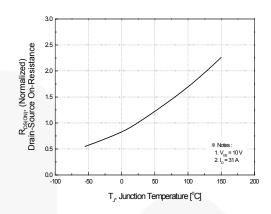


Figure 8. On-Resistance Variation vs Temperature

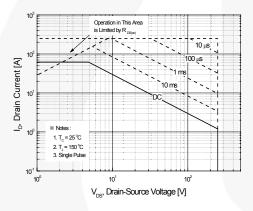


Figure 9. Maximum Safe Operating Area

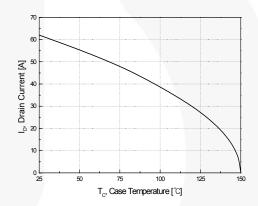


Figure 10. Maximum Drain Current vs Case Temperature

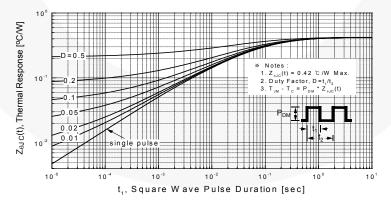


Figure 11. Transient Thermal Response Curve

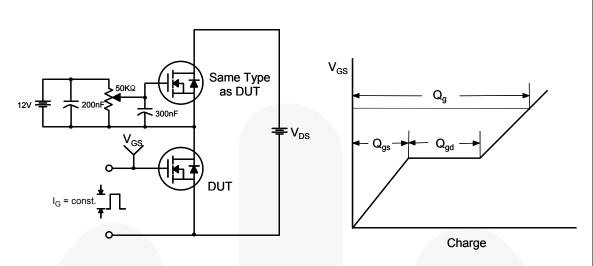


Figure 12. Gate Charge Test Circuit & Waveform

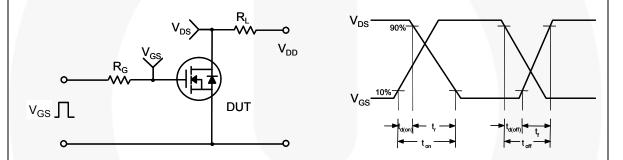


Figure 13. Resistive Switching Test Circuit & Waveforms


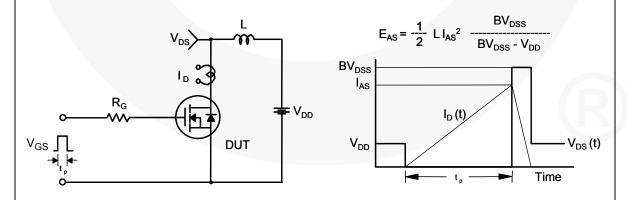


Figure 14. Unclamped Inductive Switching Test Circuit & Waveforms

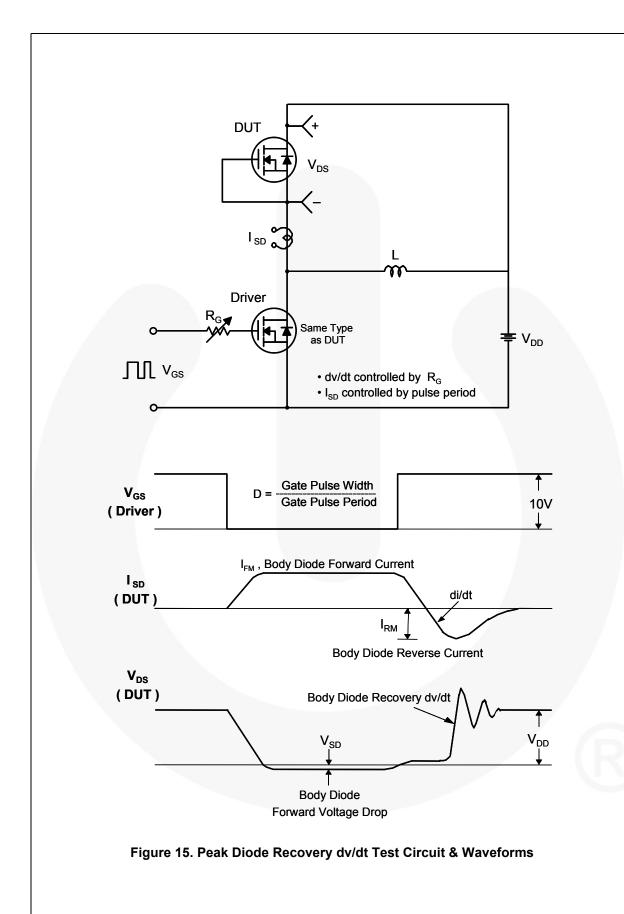

Mechanical Dimensions

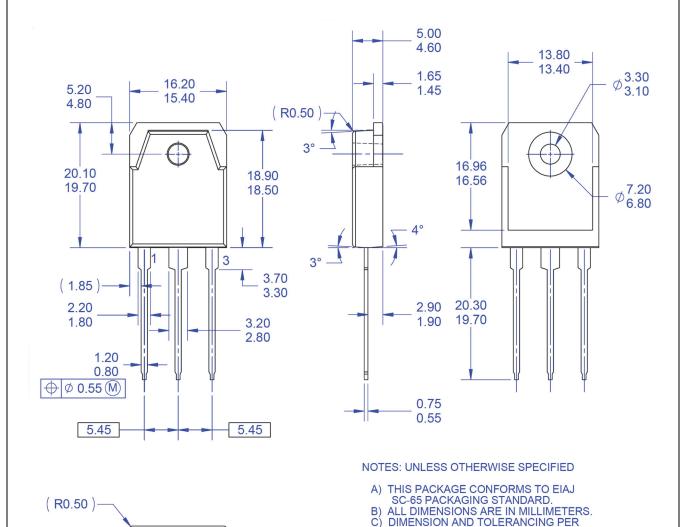


Figure 16. TO3PN, 3-Lead, Plastic, EIAJ SC-65

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

7

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/package/packageDetails.html?id=PN_TT3PN-003

ASME14.5-2009.

D) DIMENSIONS ARE EXCLUSSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSSIONS.
E) DRAWING FILE NAME: TO3PN03AREV1.

FAIRCHILD SEMICONDUCTOR.





TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™ AX-CAP®* BitSiC™ Build it Now™

CorePLUS™ CorePOWER™ CROSSVOLT™ CTL™

Current Transfer Logic™ DEUXPEED[®] Dual Cool™

EcoSPARK® EfficentMax™ ESBC™

Fairchild® Fairchild Semiconductor® FACT Quiet Series™ FAST®

FastvCore™ FETBench™ FPS™

F-PFS™ FRFFT®

Global Power ResourceSM GreenBridge™

Green FPS™ Green FPS™ e-Series™

G*max*™ GTO™ IntelliMAX™ ISOPLANAR™

Marking Small Speakers Sound Louder

and Better™ MegaBuck™ MICROCOUPLER™ MicroFET™ MicroPak™ MicroPak2™ MillerDrive™ MotionMax™

mWSaver® OptoHiT™ OPTOLOGIC® OPTOPLANAR® (1)_® PowerTrench® PowerXS™

Programmable Active Droop™

QFET QSTM Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™

SignalWise™ SmartMax™ SMART START™ Solutions for Your Success™

STEALTH™ SuperFET® SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS®

SyncFET™

Sync-Lock™

TRUECURRENT®* μSerDes™ UHC^{\circledR} Ultra FRFET™ UniFET™ VCX™ VisualMax™ VoltagePlus™ XS™

仙童 ™

SYSTEM ®*

GENERAL ®

TinyBoost[®]

TinyBuck[®]

TinyCalc™

 $\mathsf{TinyLogic}^{\mathbb{R}}$

TINYOPTO™

TinyPower™

TinvPWM™

TinyWire™

TranSiC™

TriFault Detect™

*Trademarks of System General Corporation, used under license by Fairchild Semiconductor

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS **Definition of Terms**

Datasheet Identification Product Status		Definition
		Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary First Production		Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed Full Production		Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete Not In Production		Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 168

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FQA62N25C