July 2013



FQPF2N80YDTU

N-Channel QFET® MOSFET


8\$0 V, 1.5 A, * " Ω


Description

This N-Channel enhancement mode power MOSFET is • 1.5 A, 8 \in 0 V, R_{DS(on)}=Î \not EH $\acute{\Omega}$ (Max.)@V_{GS}=10 V, I_D=0.75 A produced using Fairchild Semiconductor®'s proprietary

Low Gate Charge (Typ. 12 nC) planar stripe and DMOS technology. This advanced MOSFET technology has been especially tailored to $\,^{\bullet}$ Low C_{rss} (Typ. 5.5 pF) reduce on-state resistance, and to provide superior • 100% Avalanche Tested switching performance and high avalanche energy strength. These devices are suitable for switched mode power supplies, active power factor correction (PFC), and electronic lamp ballasts.

Features





Absolute Maximum Ratings T_C = 25°C unless otherwise noted

| Symbol | Parameter | | FQPF2N80YDTU | Unit | |
|-----------------------------------|--|----------|--------------|------|--|
| V _{DSS} | Drain-Source Voltage | | 800 | V | |
| I _D | Drain Current - Continuous (T _C = 25°C) | | 1.5 | Α | |
| | - Continuous (T _C = 100°C) | | 0.95 | Α | |
| I _{DM} | Drain Current - Pulsed | (Note 1) | 6.0 | А | |
| V _{GSS} | Gate-Source Voltage | | ± 30 | V | |
| E _{AS} | Single Pulsed Avalanche Energy | (Note 2) | 5.2 | mJ | |
| I _{AR} | Avalanche Current | (Note 1) | 1.5 | А | |
| E _{AR} | Repetitive Avalanche Energy | (Note 1) | 3.5 | mJ | |
| dv/dt | Peak Diode Recovery dv/dt | (Note 3) | 4.0 | V/ns | |
| P_D | Power Dissipation (T _C = 25°C) | | 35 | W | |
| | - Derate above 25°C | | 0.28 | W/°C | |
| T _J , T _{STG} | Operating and Storage Temperature Range | | -55 to +150 | °C | |
| TL | . Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds | | 300 | °C | |
| . L | | | 300 | | |

Thermal Characteristics

| Symbol | Parameter | FQPF2N80YDTU | Unit | |
|-----------------|---|--------------|------|--|
| $R_{\theta JC}$ | Thermal Resistance, Junction-to-Case, Max. | 3.57 | °C/W | |
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient, Max. | 62.5 | °C/W | |

| Symbol | Parameter | Parameter Test Conditions | | Тур | Max | Unit |
|---|---|--|-----|-----------|-----------|----------|
| Off Cha | aracteristics | | | | | |
| BV _{DSS} | Drain-Source Breakdown Voltage | $V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$ | 800 | | | V |
| ΔBV _{DSS} / ΔT _J | Breakdown Voltage Temperature Coefficient | I _D = 250 μA, Referenced to 25°C | | 0.9 | | V/°C |
| I _{DSS} | Zero Gate Voltage Drain Current | V _{DS} = 800 V, V _{GS} = 0 V | | | 10 | μΑ |
| | | V _{DS} = 640 V, T _C = 125°C | | | 100 | μΑ |
| I _{GSSF} | Gate-Body Leakage Current, Forward | V _{GS} = 30 V, V _{DS} = 0 V | | | 100 | nA |
| I _{GSSR} | Gate-Body Leakage Current, Reverse | $V_{GS} = -30 \text{ V}, V_{DS} = 0 \text{ V}$ | | | -100 | nA |
| On Cha | aracteristics | | | | | |
| V _{GS(th)} | Gate Threshold Voltage | $V_{DS} = V_{GS}, I_{D} = 250 \mu\text{A}$ | 3.0 | | 5.0 | V |
| R _{DS(on)} | Static Drain-Source On-Resistance | V _{GS} =10 V, I _D =0.75 A | | 4.9 | 6.3 | Ω |
| 9 _{FS} | Forward Transconductance | V _{DS} = 50 V, I _D = 0.75 A | | 2.2 | | S |
| C _{oss} C _{rss} | Output Capacitance Reverse Transfer Capacitance | f = 1.0 MHz | | 45 5.5 | 60 7.0 | pF pF |
| Orss | Reverse Hansier Capacitance | | | 5.5 | 7.0 | рг |
| Switchi | ing Characteristics | | | | | |
| t _{d(on)} | Turn-On Delay Time | $V_{DD} = 400 \text{ V}, I_{D} = 2.4 \text{ A},$ | | 12 | 35 | ns |
| t _r | Turn-On Rise Time | $R_G = 25 \Omega$ | | 30 | 70 | ns |
| t _{d(off)} | Turn-Off Delay Time | | | 25 | 60 | ns |
| t _f | Turn-Off Fall Time | (Note 4) | | 28 | 65 | ns |
| Qg | Total Gate Charge | $V_{DS} = 640 \text{ V}, I_{D} = 2.4 \text{ A},$ | | 12 | 15 | nC |
| Q _{gs} | Gate-Source Charge | V _{GS} = 10 V | | 2.6 | | nC |
| Q _{gd} | Gate-Drain Charge | (Note 4) | | 6.0 | | nC |
| Drain-S | Source Diode Characteristics a | nd Maximum Ratings | | | | |
| I _S | Maximum Continuous Drain-Source Diode Forward Current | | | | 1.5 | Α |
| I _{SM} | Maximum Pulsed Drain-Source Diode Forward Current | | | | 6.0 | Α |
| V _{SD} | Drain-Source Diode Forward Voltage | $V_{GS} = 0 \text{ V}, I_{S} = 1.5 \text{ A}$ | | | 1.4 | V |
| V SD | Ziani Coaroc Zioac i cinara romage | | | | | |
| t _{rr} | Reverse Recovery Time | V _{GS} = 0 V, I _S = 2.4 A, | | 480 | | ns |

Typical Characteristics




Figure 1. On-Region Characteristics




Figure 2. Transfer Characteristics




Figure 3. On-Resistance Variation vs Drain Current and Gate Voltage




Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature




Figure 5. Capacitance Characteristics




Figure 6. Gate Charge Characteristics

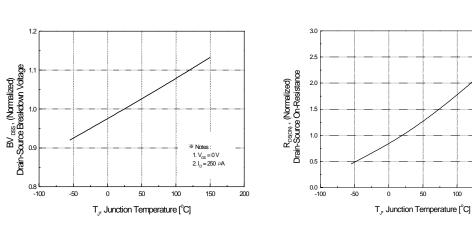


Figure 7. Breakdown Voltage Variation vs Temperature

Typical Characteristics (Continued)

Figure 8. On-Resistance Variation vs Temperature

1. V_{GS} = 10 V 2. I_D = 1.2 A

150




Figure 9. Maximum Safe Operating Area




Figure 10. Maximum Drain Current vs Case Temperature



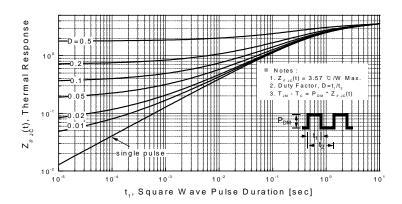


Figure 11. Transient Thermal Response Curve


Gate Charge Test Circuit & Waveform

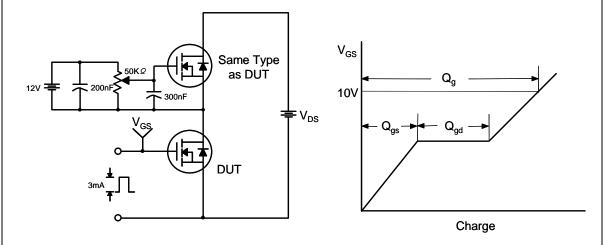


Resistive Switching Test Circuit & Waveforms

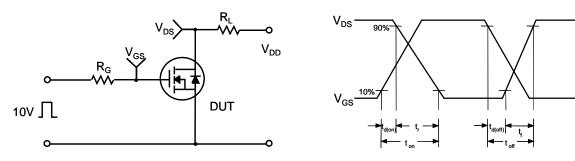


Unclamped Inductive Switching Test Circuit & Waveforms

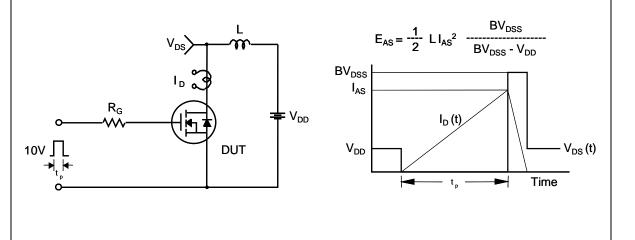

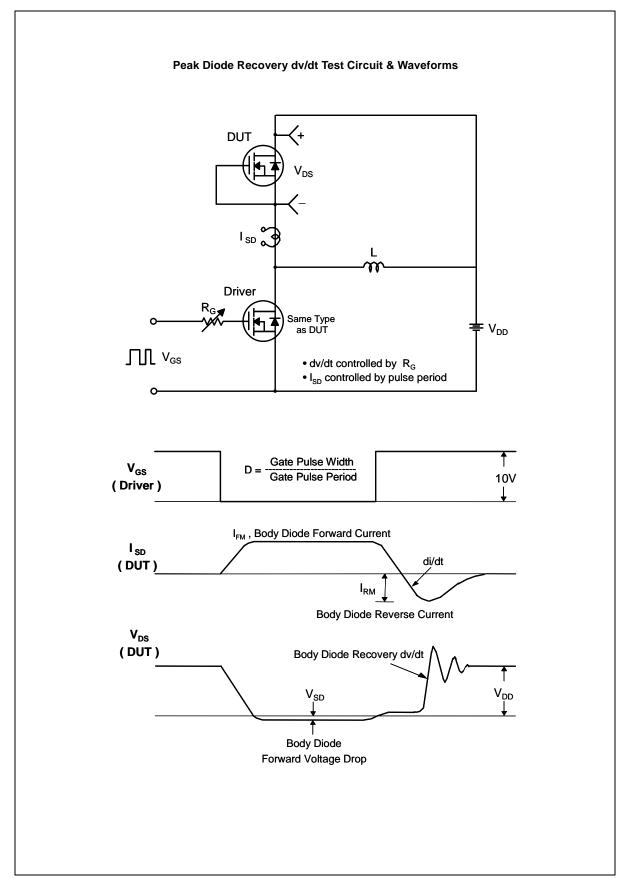

Mechanical Dimensions

TO220Q03

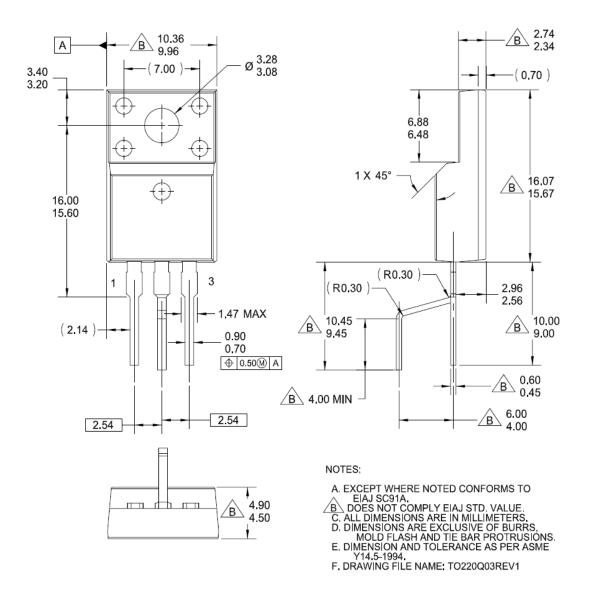

TO-220F 3L - TO220, MOLDED, 3LD, FULL PACK, EIAJ SC91, Y FORMED LEAD

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/package/packageDetails.html?id=PN_TF220-FA3

Dimensions in Millimeters





TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

2Cool™ FPS™ AccuPower™ F-PFS™ AX-CAP® FRFET® BitSiC™ Build it Now™

Green Bridge™ Green FPS™ CorePLUS™ Green FPS™ e-Series™ CorePOWER™ CROSSVOLT™ Gmax™

GTO™ CTL^{TN} Current Transfer Logic™ DEUXPEED® IntelliMAX™ ISOPLANAR™ Marking Small Speakers Sound Louder Dual Cool™

EcoSPARK® and Better™ MegaBuck™ EfficentMax™ MICROCOUPLER™ **ESBC™** MicroFET™

Fairchild[®] Fairchild Semiconductor®

FACT Quiet Series™ FACT® FAST[®] FastvCore[™] FETBench™

(1)_® PowerTrench® Global Power ResourceSM PowerXS™

Programmable Active Droop™

QFET® OSTM Quiet Series™ RapidConfigure™

Saving our world, 1mW/W/kW at a time™

SignalWise™ SmartMax™ SMART START™

Solutions for Your Success™

SPM® STEALTH™ SuperFET® SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS[®] SyncFET™

Sync-Lock™

SYSTEM ®*
GENERAL TinyBoost™ TinyBuck™ TinyCalc™ TinyLogic[®] TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™ TranSiC® TriFault Detect™ TRUECURRENT®* μSerDes™

UHC® Ultra FRFET™ UniFET™ VCX^{TM} VisualMax™ VoltagePlus™ XST

*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

MicroPak™

MicroPak2™

 $MillerDrive^{TM}$

MotionMax™

mWSaver™

OPTOLOGIC®

OPTOPLANAR®

OptoHiT™

DISCLAIMER
FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY
FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS **Definition of Terms**

| Datasheet Identification | Product Status | Definition |
|--------------------------|-----------------------|---|
| Advance Information | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design. |
| Obsolete | Not In Production | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only. |

Rev. 164

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fairchild Semiconductor: FQPF2N80YDTU