## SENSDAR®

# 92 EG fan Series x92x25mm



**Optional Features** 













Bearing Type: Sleeve Bearing & Ball Bearing

Material: Impeller & Frame: Plastic (UL94V-0)

Lead Wire: UL Type


Operation Temperature:  $-10^{\circ}$ C $-70^{\circ}$ C, 35%-85%RH Storage Temperature:  $-40^{\circ}$ C $-80^{\circ}$ C, 35%-85%RH




### **SPECIFICATIONS**

	Model	Bearing System		Rated Voltage	Freq.	Operation Voltage	Rated Current	Power	Rated Speed	Air Flow	Air Pressure	Noise Level	Weight
		Ball	Sleeve	VAC	Hz	VAC	Α	W	RPM	CFM	mmH <sub>2</sub> O	dBA	g
	SE9225HX	•		115/230	50/60	98-264	0.06	6.0	2800	55.2	3.0	33	85
	SE9225MX	•	•				0.05	5.0	2500	49.3	2.4	30	
	SE9225LX	•	•				0.03	3.0	2000	39.4	1.5	25	

#### **DIMENSIONS DRAWING**

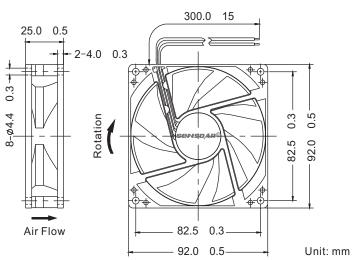

### **P&Q CURVE (AT RATED VOLTAGE)**

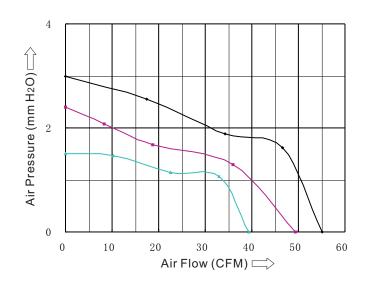

#### Note:

\*Specifications are subject to change without prior notice.

<sup>\*</sup>All readings are typical values at rated voltage.

<sup>\* &</sup>quot;X" in model list can be B, S, and C, meaning Dual Ball Bearing, Sleeve Bearing and 1 Ball 1 Sleeve Bearing