





### SINGLE STAGE PRIMARY SIDE REGULATION PFC CONTROLLER FOR LED DRIVER

### Description

The AP1682E is a high performance AC/DC universal input Primary Side Regulation Power Factor Controller for LED driver applications. The device uses Pulse Frequency Modulation (PFM) technology to regulate output current while achieving high power factor and low THD.

The AP1682E provides accurate constant current (CC) regulation while removing the opto-coupler and secondary control circuitry. It also eliminates the need of loop compensation circuitry while maintaining stability. The AP1682E achieves excellent regulation and high efficiency, yet meets the requirement of IEC61000-3-2 harmonic standard.

The AP1682E features low start-up current, low operation current and high efficiency. It also has rich protection features including over voltage, short circuit, over current protection etc.

The AP1682E is available in SO-8 package.

#### Features

- Primary Side Control for Output Current Regulation Without Opto-coupler and Secondary CV/CC Control Circuitry
- Low Start-up Current
- High Power Factor and Low THD for Universal Input Range
- Tight CC Regulation Performance for Universal Input Mains
   Voltage Range
- Eliminates Control Loop Compensation Circuitry
- Built-in Acceleration Start
- Open-load and Reload Detection
- Over Voltage and Short Circuit Protection
- Over Current Protection
- Cost Effective Total PFC LED Driver Solution
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)

Notes:

1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.

- 2. See http://www.diodes.com/quality/lead\_free.html for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

## Pin Assignments

	(Top View)	
NC 1 VS 2 VPK 3	0	8 VCC 7 OUT 6 GND
CS 4		5 FB
	SO-8	


### Applications

Single Stage Power Factor Correction Power Supply for LED
Lighting






### **Typical Applications Circuit**

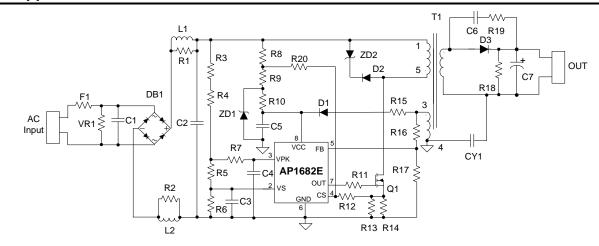

### **Pin Descriptions**

Pin Number	Pin Name	Function
1	NC	No connection
2	VS	The rectified input voltage sensing pin. The pin is detecting the instantaneous rectified sine waveform of input voltage
3	VPK	The rectified input voltage peak value sensing pin. The pin is detecting the rectified sine waveform peak value of input voltage
4	CS	Primary current sensing
5	FB	This pin captures the feedback voltage from the auxiliary winding. FB voltage is used to control no load output voltage and determine acceleration stop point at start-up phase
6	GND	Ground. Current return for gate driver and control circuits of the IC
7	OUT	Gate driver output
8	VCC	Supply voltage of gate driver and control circuits of the IC

### **Functional Block Diagram**

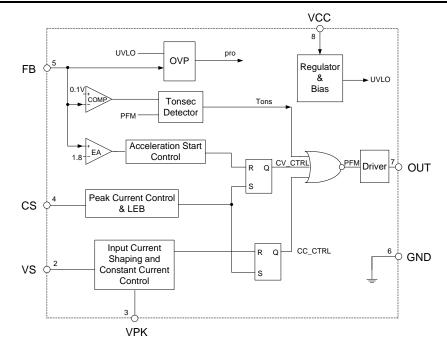





#### Absolute Maximum Ratings (Note 4)

Symbol	Parameter	Rating	Unit	
V <sub>CC</sub>	Power Supply Voltage	-0.3 to +35	V	
lout	Driver Output Current	300	mA	
V <sub>VS</sub> , V <sub>PK</sub> , V <sub>CS</sub>	Voltage at VS, VPK, CS	-0.3 to 7	V	
V <sub>FB</sub>	FB Input Voltage	-40 to 10	V	
TJ	Operating Junction Temperature	+150	°C	
T <sub>STG</sub>	Storage Temperature	-65 to +150	°C	
T <sub>LEAD</sub>	Lead Temperature (Soldering, 10 sec)	+300	°C	
PD	Power Dissipation (T <sub>A</sub> = +50°C)	0.65	W	
θ <sub>JA</sub>	Thermal Resistance (Junction to Ambient)	190	°C/W	
_	ESD (Machine Model)	200	V	
_	ESD (Human Body Model)	3000	V	

Note 4: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

### **Recommended Operating Conditions**

Symbol	Parameter	Min	Мах	Unit
V <sub>CC</sub>	Power Supply Voltage	9	21	V
ТА	Ambient Temperature	-40	+105	°C






#### Electrical Characteristics (@ V<sub>CC</sub> = 15V, T<sub>A</sub> = +25°C, unless otherwise specified.) Symbol Parameter Conditions Min Тур Max Unit **UVLO Section** V<sub>TH</sub> (ST) Start-up Threshold 18 19 20 V \_ Minimal Operating Voltage ٧ VOPR (Min) After turn on 7.5 8 8.5 VCC OVP Voltage 28 32 34 V V<sub>CC\_OVP</sub> Standby Current Section $V_{CC} = V_{TH} (ST) - 0.5V,$ Start-up Current 20 Ist \_ μΑ Before start up Maximum Operating Current $V_{VS} = V_{PK} = 3V$ 1000 1300 μA I<sub>CC</sub> (Max) \_ **Drive Output Section** $I_{GD-SOURCE} = 20 mA$ 10 V Output High Level Voltage VOH \_ \_ $V_{CC} = 12V$ $I_{GD-SINK} = 20mA$ Output Low Level Voltage V Vol \_ 1 \_ $V_{CC} = 12V$ Output Voltage Rise Time $C_L = 1nF$ 100 140 190 ns t<sub>R</sub> tF Output Voltage Fall Time $C_L = 1nF$ 30 60 90 ns $I_{GD-SOURCE} = 5mA$ 12 V VO-CLAMP Output Clamp Voltage 13.5 15 $V_{CC} = 20V$ $V_{CC} = 0$ to $V_{CC-ON}$ **UVLO Saturation Voltage** V VUVLO 1.1 \_ $I_{SINK} = 10 mA$ **VS Input Section** Maximum Ratio $V_{VS} = V_{PK} = 3V$ 0.8 1.2 ٧ V<sub>VS</sub>/V<sub>PK</sub> (Max) 1 V<sub>VS</sub>/V<sub>PK</sub> (Min) Minimum Ratio $V_{VS} = 0V, V_{PK} = 3V$ 0.2 V \_ \_ **Current Sense Section** Minimum On Time 750 1000 500 ton (Min) \_ ns Short Circuit Protection V \_ 3 4 VSOCP \_ Voltage **Feedback Input Section** $I_{FB}$ FB Pin Input Leakage Current $V_{FB} = 4V$ \_ 2 8 μΑ V<sub>FB</sub> (ACC) Acceleration Start Threshold 1.4 1.8 2.2 V \_ V<sub>FB</sub> (CV) **CV** Threshold 3.8 4.1 4.4 V \_ **Over Voltage Protection** \_ 5.6 6.25 6.9 V V<sub>FB</sub> (OVP) **Over Temperature Protection Section** Shutdown Temperature +140 °C \_ \_ \_ \_ \_ **Temperature Hysteresis** \_ \_ +20 \_ °C






### **Performance Characteristics**




Supply Current vs. Supply Voltage


#### Output Clamp Voltage vs. Supply Voltage




#### Minimal Operating Voltage vs. Ambient Temperature




CV Threshold vs. Supply Voltage



#### Start-up Voltage vs. Ambient Temperature



#### Start-up Current vs. Ambient Temperature




AP1682E Document number: DS36648 Rev. 1 - 2






### Performance Characteristics (Cont.)




### **Operating Current vs. Ambient Temperature**

CV Threshold vs. Ambient Temperature




#### FB Input Leakage Current vs. Ambient Temperature








### **Ordering Information**

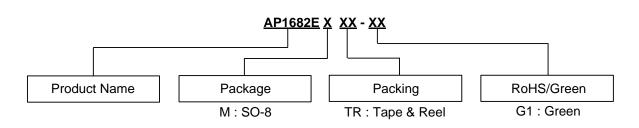

Package	Temperature Range	Part Number	Marking ID	Packing
SO-8	-40°C to +105°C	AP1682EMTR-G1	1682EM-G1	4000/13"Tape & Reel

### **Marking Information**

(Top View)




First and Second Lines: Logo and Marking ID Third Line: Date Code Y: Year WW: Work Week of Molding A: Assembly House Code XX: 7<sup>th</sup> and 8<sup>th</sup> Digits of Batch No.





### Package Outline Dimensions (All dimensions in mm (inch).)

#### (1) Package Type: SO-8

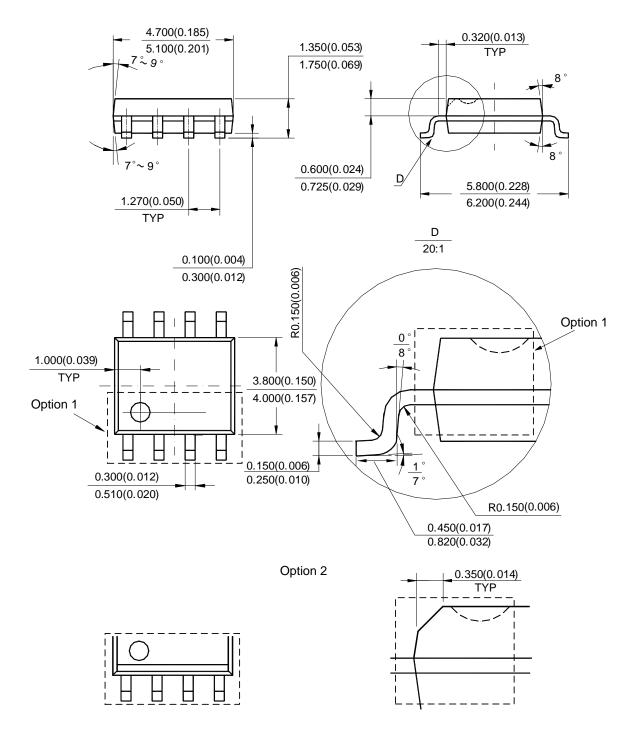


Note: Eject hole, oriented hole and mold mark is optional.





### **Suggested Pad Layout**

#### (1) Package Type: SO-8

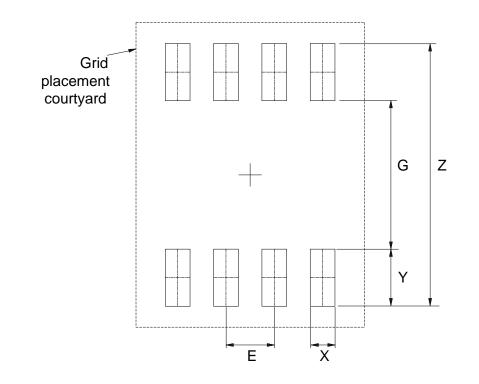

Dimensions	Z	G	X	Y	E
	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)
Value	6.900/0.272	3.900/0.154	0.650/0.026	1.500/0.059	1.270/0.050





#### IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body, or
  - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2014, Diodes Incorporated

www.diodes.com

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated: AP1682EMTR-G1