

LOW VOLTAGE (1.24V) ADJUSTABLE PRECISION SHUNT REGULATOR

Description

The AZ431L series ICs are low voltage three-terminal adjustable regulators with guaranteed thermal stability over a full operation range. These ICs feature sharp turn-on characteristics, low temperature coefficient and low output impedance, which make them ideal substitutes for Zener diodes in applications such as switching power supply, charger, motherboard and other adjustable regulators.

The output voltage can be set to any value between 1.24V and 18V with two external resistors.

The AZ431L precision reference is offered in two voltage tolerance: 0.5% and 1.0%.

These ICs are available in 4 packages: TO-92 (bulk or ammo packing), SOT-23, SOT-23-5 and SOT-89.


Features

- Wide Programmable Precise Output Voltage from 1.24V to 18V
- High Stability under Capacitive Load
- Low Temperature Deviation: 3mV Typical
- Low Equivalent Full-range Temperature Coefficient: 20PPM/°C Typical
- Low Dynamic Output Resistance: 0.05Ω Typical
- High Sink Current Capacity from 0.1mA to 100mA
- Low Output Noise
- Wide Operating Range of -40 to +125°C

Applications


- Graphic Card
- PC Motherboard
- Voltage Adapter
- Switching Power Supply
- Charger

Pin Assignments

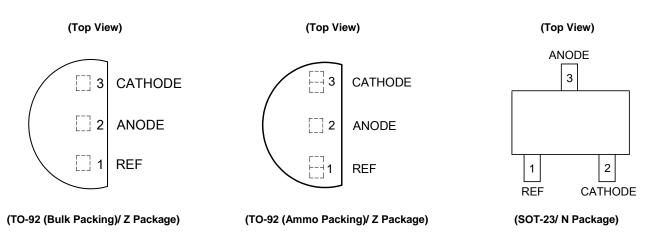





Pin Assignments (Cont.)

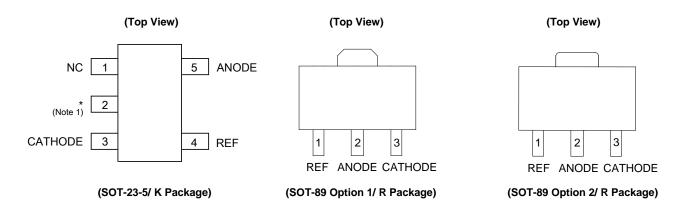

Note 1: *Pin 2 is attached to substrate and must be connected to ANODE or open.

Typical Applications Circuit

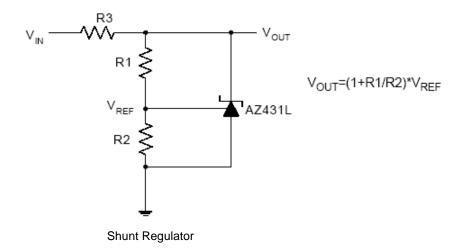


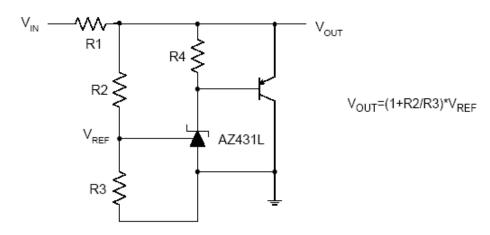


High Current Shunt Regulator




Typical Applications Circuit (Cont.)

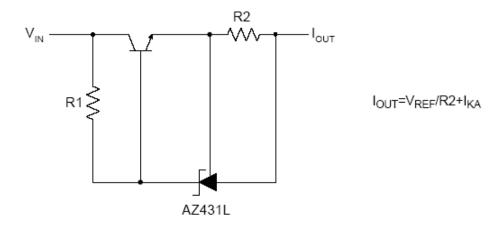

Current Source or Current Limit

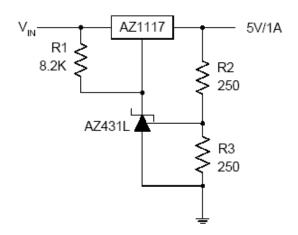

Precision 5V 1A Regulator

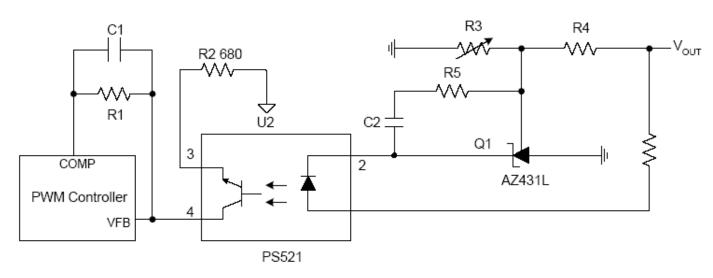


PWM Converter with Reference





Functional Block Diagram

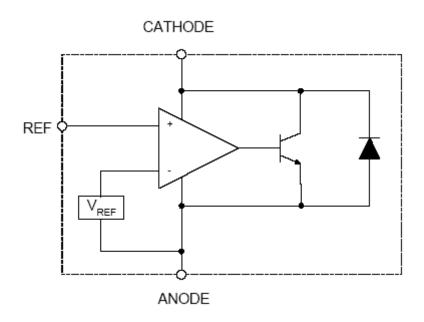

Absolute Maximum Ratings (Note 2)

Symbol	Parameter	Ratin	Unit		
V_{KA}	Cathode Voltage	20	V		
I _{KA}	Cathode Current Range (Continuous)	-100 to	mA		
I _{REF}	Reference Input Current Range	Reference Input Current Range 10			
_		Z, R Package 770			
P_D	Power Dissipation	N, K Package	370	mW	
TJ	Junction Temperature	+150		°C	
T _{STG}	Storage Temperature Range	-65 to +	°C		

Note 2: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V_{KA}	Cathode Voltage	V_{REF}	18	V
I _{KA}	Cathode Current	0.1	100	mA
-	Operating Ambient Temperature Range	-40	+125	°C






AZ431L

Electrical Characteristics (Operating Conditions: T_A = +25 °C, unless otherwise noted.)


Symbol	Parame	Parameter Test Conditions		nditions	Min	Тур	Max	Unit	
.,	5.4	0.5%		V V I 40 A		1.234	1.240	1.246	.,
V_{REF}	Reference Voltage	1.0%	4	$V_{KA} = V_{REF}, I_{KA} =$	= 10mA	1.228	1.240	1.252	V
					0 to +70°C	_	2	10	
ΔV_{REF}	Deviation of Referen Over Full Temperatu	ū	4	$V_{KA} = V_{REF},$ $I_{KA} = 10mA$	-40 to +85°C	_	3	10	mV
		3.			-40 to +125°C	_	4	15	
$\frac{\Delta V_{REF}}{\Delta V_{KA}}$	Ratio of Change in V _{REF} to the Change in Cathode Voltage		5	I _{KA} = 10mA, ΔV _{KA} : V _{REF} to 16V		_	-0.5	-1.5	mV/V
I_{REF}	Reference Input Current		5	I _{KA} = 10mA, R1 = 10KΩ, R2 = ∞		_	0.15	0.4	μΑ
ΔI_{REF}	Deviation of Reference Current Over Full Temperature Range		5	I_{KA} = 10mA, R1 = 10KΩ, R2 = ∞, T_A = -40 to +125°C		-	0.1	0.4	μA
I _{KA} (Min)	Minimum Cathode Current for Regulation		4	$V_{KA} = V_{REF}$		_	55	80	μΑ
I _{KA}	I _{KA} (Off) Off-state Cathode Current			V _{REF} = 0, V _{KA} = 18V		_	0.04	0.10	
			6	V _{KA} = 6, V _{REF} = 0		_	0.01	0.05	μA
Z _{KA}	Dynamic Impedance		= 1 to 100mA,	_	0.05	0.15	Ω		
				SOT-23		_	84.84	_	
				SOT-23-5		_	84.84	-	°C/W
θ_{JC}	Thermal Resistance		_	TO-92		-	140.80	-	
				SOT-89		-	29.80	-	




Electrical Characteristics (Cont.)



Test Circuit 4 for $V_{KA} = V_{REF}$

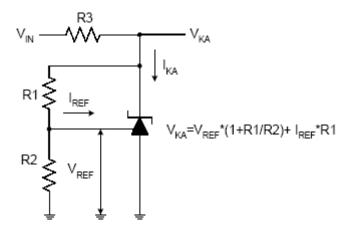

Test Circuit 5 for $V_{KA} > V_{REF}$

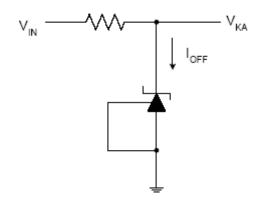


Test Circuit 6 for I_{OFF}




Performance Characteristics


Reference Voltage vs. Ambient Temperature

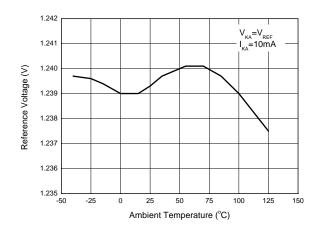


Reference Current vs. Ambient Temperature

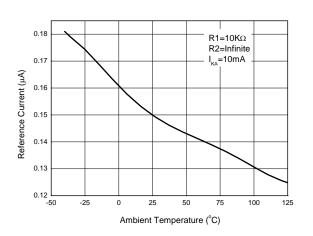


Cathode Current vs. Cathode Voltage

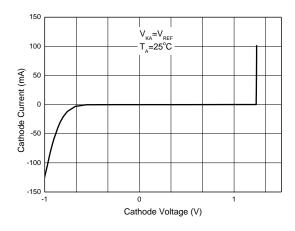


Cathode Current vs. Cathode Voltage

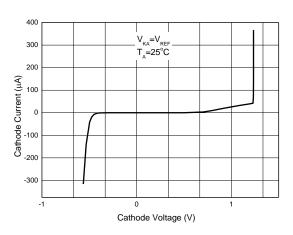

Small Signal Voltage Gain vs. Frequency

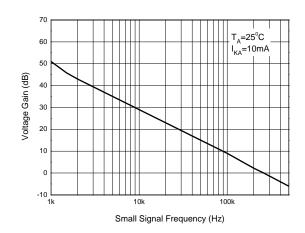


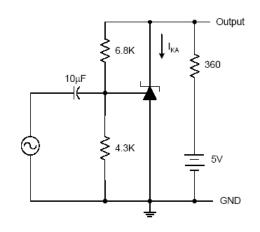





Performance Characteristics (Cont.)


Dynamic Impedance vs. Frequency

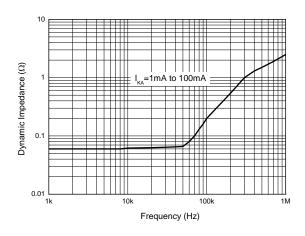

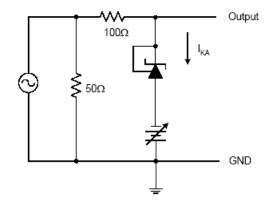


Pulse Response of Input and Output Voltage

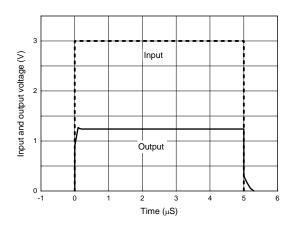

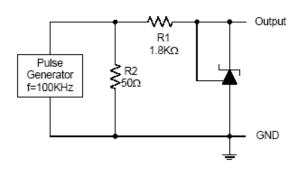


Ratio of Delta Reference Voltage to the Ratio of Cathode Voltage vs. Ambient Temperature

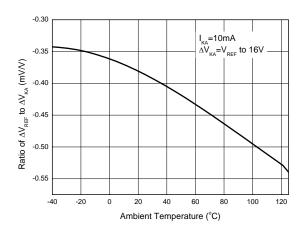



Ordering Information

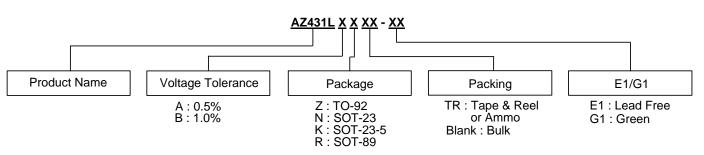


Diodes IC's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green packages.

Package	Temperature	Voltage	Part Number		Mark	Packing											
	Range	Tolerance	Lead Free	Green	Lead Free	Green	Туре										
		0.5%	AZ431LAZ-E1	AZ431LAZ-G1	AZ431LAZ- E1	AZ431LAZ-G1	Bulk										
		0.5%	AZ431LAZTR- E1	AZ431LAZTR- G1	AZ431LAZ- E1	AZ431LAZ-G1	Ammo										
TO-92	-40 to +125°C	-40 to +125°C	1.0%	AZ431LBZ-E1	AZ431LBZ-G1	AZ431LBZ- E1	AZ431LBZ-G1	Bulk									
										1.0%	AZ431LBZTR- E1	AZ431LBZTR- G1	AZ431LBZ- E1	AZ431LBZ-G1	Ammo		
SOT-23 -40 to	-40 to +125°C				0.5%	AZ431LANTR- E1	AZ431LANTR- G1	EA6	GA6	Tape & Reel							
		1.0%	AZ431LBNTR- E1	AZ431LBNTR- G1	EA7	GA7	Tape & Reel										
		0.5%	AZ431LAKTR- E1	AZ431LAKTR- G1	E5A	G5A	Tape & Reel										
SOT-23-5	-40 to +125°C	-40 to +125°C	-40 to +125°C	-40 to +125°C	-40 to +125°C	-40 to +125°C	-40 to +125°C	-40 to +125°C	-40 to +125°C	-40 to +125°C	-40 to +125°C	1.0%	AZ431LBKTR- E1	AZ431LBKTR- G1	E6A	G6A	Tape & Reel
	-40 to +125°C	-40 to +125°C	-40 to +125°C	0.5%	AZ431LARTR- E1	AZ431LARTR- G1	E41A	G41A	Tape & Reel								
SOT-89				1.0%	AZ431LBRTR- E1	AZ431LBRTR- G1	E41B	G41B	Tape & Reel								





(1) Package Type: TO-92 (Bulk Packing)

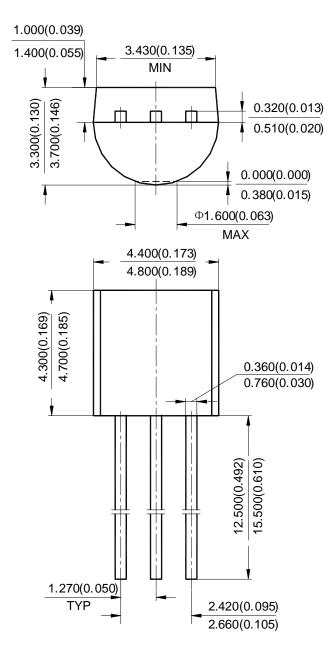



(2) Package Type: TO-92 (Ammo Packing)

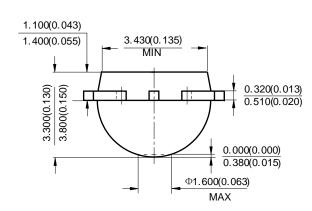


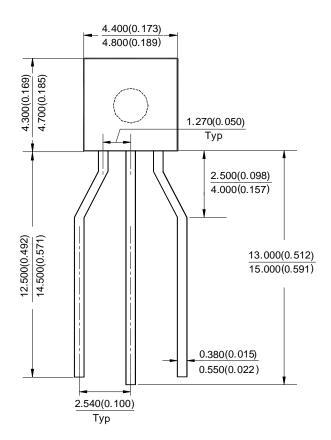






(3) Package Type: SOT-23

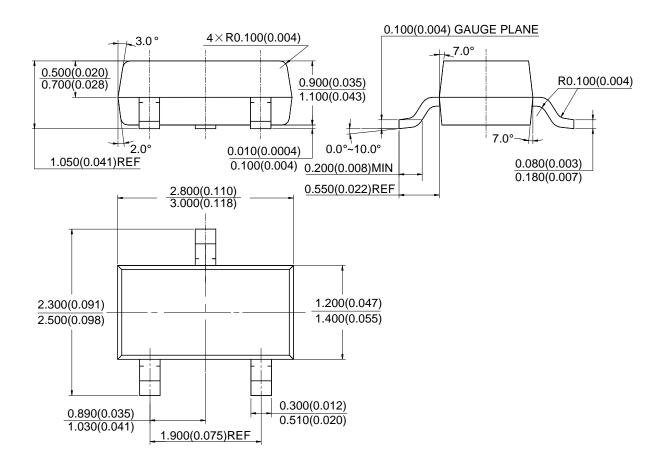






(4) Package Type: SOT-23-5

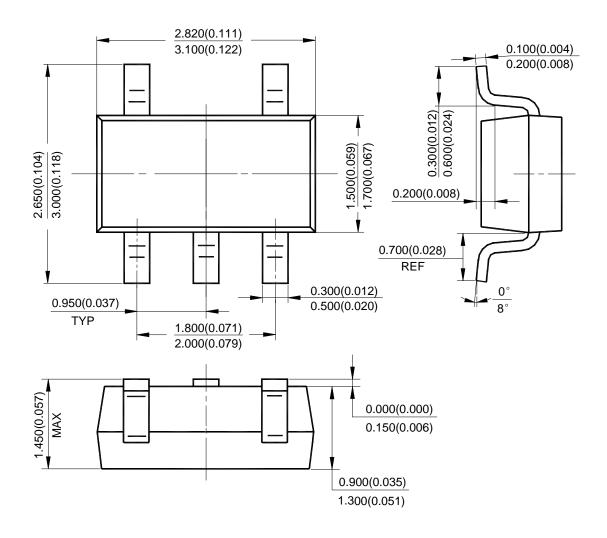









(5) Package Type: SOT-89

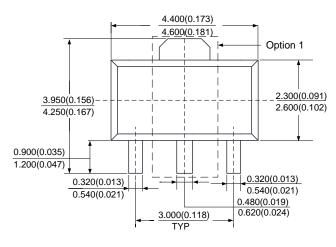





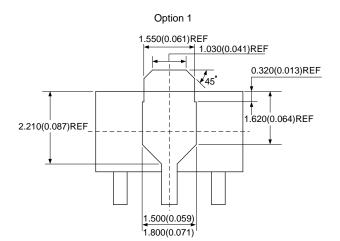






Suggested Pad Layout

(1) Package Type: SOT-23

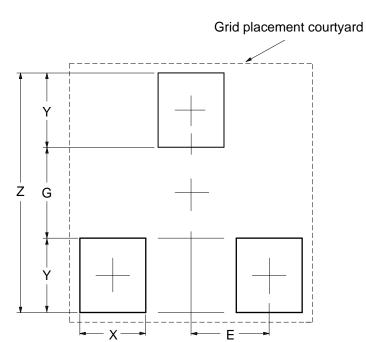


Dimonoiono	Z	G	X	Υ	E
Dimensions	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)
Value	2.900/0.114	1.100/0.043	0.800/0.031	0.900/0.035	0.950/0.037



Suggested Pad Layout (Cont.)

(2) Package Type: SOT-23-5

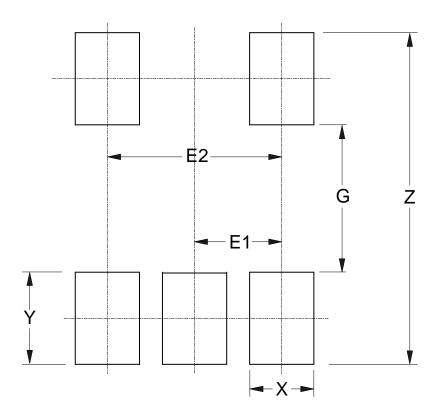


Dimensions	Z	G	Х	Υ	E1	E2
Dimensions	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)
Value	3.600/0.142	1.600/0.063	0.700/0.028	1.000/0.039	0.950/0.037	1.900/0.075



Suggested Pad Layout (Cont.)

(3) Package Type: SOT-89

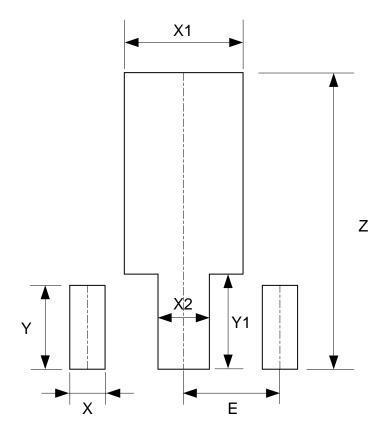

Dimensions	Z	X	X1	X2	Y	Y1	E
	(mm)/(inch)						
Value	4.600/0.181	0.550/0.022	1.850/0.073	0.800/0.031	1.300/0.051	1.475/0.058	1.500/0.059



IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
 - 1. are intended to implant into the body, or
 - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2012, Diodes Incorporated

www.diodes.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated:

AZ431LBNTR-G1 AZ431LAZTR-G1 AZ431LBRTR-G1 AZ431LBKTR-E1 AZ431LBZTR-E1 AZ431LAKTR-E1

AZ431LARTR-G1 AZ431LBZTR-G1 AZ431LAKTR-G1 AZ431LAZTR-E1 AZ431LBNTR-E1 AZ431LANTR-E1

AZ431LANTR-G1 AZ431LBKTR-G1