

#### 100V N-CHANNEL ENHANCEMENT MODE MOSFET

#### **Product Summary**

V <sub>(BR)DSS</sub>	R <sub>DS(on)</sub>	I <sub>D</sub> T <sub>A</sub> = 25°C
100\/	85mΩ @ VGS = 10V	7.7A
100V	100mΩ @ Vgs = 6V	7.1A

# **Description and Applications**

This MOSFET features low on-resistance, fast switching and a high avalanche withstand capability, making it ideal for high efficiency power management applications.

- DC-DC Converters
- · Power management functions
- · Disconnect switches
- Motor control
- · Uninterrupted power supply

#### **Features and Benefits**

- · Low input capacitance
- · Low on-resistance
- · Fast switching speed
- "Green" Component and RoHS compliant (Note 1)
- Qualified to AEC-Q101 Standards for High Reliability


#### **Mechanical Data**

- Case: TO252-3L
- Case Material: Molded Plastic "Green" Molding Compound, UL Flammability Classification Rating 94V-0 (Note 1)
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminal Connections: See Diagram
- Terminals: Matte Tin Finish annealed over Copper leadframe.
   Solderable per MIL-STD-202, Method 208
- · Weight: 0.33 grams (approximate)






Top View



Pin Out - Top View



**Equivalent Circuit** 


#### Ordering Information (Note 1)

Product	Marking	Reel size (inches)	Tape width (mm)	Quantity per reel	
ZXMN10A09KTC	ZXMN10A09	13	16	2,500	

1. Diodes, Inc. defines "Green" products as those which are RoHS compliant and contain no halogens or antimony compounds; further information about Diodes Inc.'s "Green" Policy can be found on our website. For packaging details, go to our website.

# **Marking Information**

Notes:



ZXMN = Product Type Marking Code, Line 1 10A09 = Product Type Marking Code, Line 2 YYWW = Date Code Marking YY = Year (ex: 09 = 2009) WW = Week (01-52)





#### **Maximum Ratings** @T<sub>A</sub> = 25°C unless otherwise specified

Characteristic			Symbol	Value	Unit
Drain-Source voltage			V <sub>DSS</sub>	100	V
Gate-Source voltage			V <sub>GS</sub>	±20	V
Continuous Drain current $V_{GS} = 10V$ (Note 3) $T_A = 70^{\circ}$ (Note 2)		$T_A = 70^{\circ}C$ (Note 3)	I <sub>D</sub>	7.7 6.2 5.0	А
Pulsed Drain current V <sub>GS</sub> = 10V (Note		(Note 4)	I <sub>DM</sub>	27	A
Continuous Source current (Body diode) (Note 3)		(Note 3)	I <sub>S</sub>	11	A
Pulsed Source current (Body diode) (Note 4)		(Note 4)	I <sub>SM</sub>	27	A

### Thermal Characteristics @TA = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit		
	(Note 2)		4.31 34.4		
Power dissipation Linear derating factor	(Note 3)	P <sub>D</sub>	10.1 80.8	W mW/°C	
	(Note 6)		2.15 17.2		
	(Note 2)		29		
Thermal Resistance, Junction to Ambient	(Note 3)	$R_{ heta JA}$	12.3	°C/W	
	(Note 6)		58		
Thermal Resistance, Junction to Lead	(Note 5)	$R_{ heta JL}$	1.14	°C/W	
Operating and storage temperature range		T <sub>J</sub> , T <sub>STG</sub>	-55 to 150	°C	


#### Notes:

- 2. For a device surface mounted on 50mm x 50mm x 1.6mm FR4 PCB with high coverage of single sided 2oz copper, in still air conditions; the device is measured when operating in a steady-state condition.
- 3. Same as note 2, except the device is measured at  $t \le 10$  sec.
- 4. Same as note 2, except the device is pulsed with D = 0.02 and pulse width 300 µs. The pulse current is limited by the maximum junction temperature.
- 5. Thermal resistance from junction to solder-point (at the end of the drain lead).
- 6. For a device surface mounted on 25mm x 25mm x 1.6mm FR4 PCB with the high coverage single sided 1oz copper, in still air conditions; the device is measured when operating in a steady-state condition.






## **Thermal Characteristics**

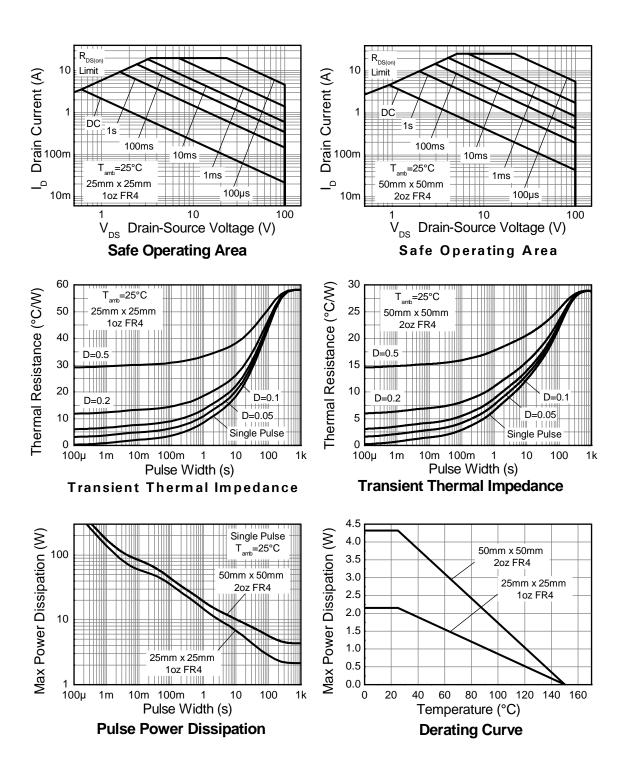





# Electrical Characteristics @T<sub>A</sub> = 25°C unless otherwise specified


Characteristic	Symbol	Min	Тур	Max	Unit	Test C	Condition	
OFF CHARACTERISTICS								
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	100	_	_	V	$I_D = 250 \mu A, V_{GS} = 0 V$		
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	_	_	1	μΑ	$V_{DS} = 100V, V_{CS}$	s = 0V	
Gate-Source Leakage	I <sub>GSS</sub>	_	_	±100	nA	$V_{GS} = \pm 20V, V_{D}$	S = 0V	
ON CHARACTERISTICS								
Gate Threshold Voltage	V <sub>GS(th)</sub>	2	_	4	V	$I_D = 250 \mu A, V_{DS}$	s = V <sub>G</sub> s	
Static Drain-Source On-Resistance (Note 7)	Pro (our		_	0.085	Ω	V <sub>GS</sub> = 10V, I <sub>D</sub> =	4.6A	
Static Drain-Source Off-Nesistance (Note 1)	R <sub>DS</sub> (ON)			0.100	12	V <sub>GS</sub> = 6V, I <sub>D</sub> = 4.2A		
Forward Transconductance (Notes 7 & 8)	g <sub>fs</sub>	_	10.7	_	S	$V_{DS} = 15V, I_D =$	4.6A	
Diode Forward Voltage (Note 7)	V <sub>SD</sub>	_	0.850	0.950	V	I <sub>S</sub> = 4.7A, V <sub>GS</sub> = 0V		
Reverse recovery time (Note 8)	t <sub>rr</sub>	_	40	_	ns	I <sub>S</sub> = 3.0A, di/dt = 100A/μs		
Reverse recovery charge (Note 8)	Q <sub>rr</sub>	_	62	_	nC			
DYNAMIC CHARACTERISTICS (Note 8)								
Input Capacitance	C <sub>iss</sub>	_	1313	_	pF		-11	
Output Capacitance	Coss	_	83	_	pF	$V_{DS} = 50V, V_{GS}$ $f = 1MHz$	= 0V	
Reverse Transfer Capacitance	C <sub>rss</sub>	_	56	_	pF	1 - 1101112		
Total Gate Charge (Note 9)	Qg	_	17.2	_	nC	V <sub>GS</sub> = 6V		
Total Gate Charge (Note 9)	Qg	_	26.0	_	nC		$V_{DS} = 50V$ ,	
Gate-Source Charge (Note 9)	Q <sub>gs</sub>	_	5.6	_	nC	V <sub>GS</sub> = 10V	$I_D = 4.6A$	
Gate-Drain Charge (Note 9)	Q <sub>gd</sub>	_	7.6	_	nC			
Turn-On Delay Time (Note 9)	t <sub>D(on)</sub>	_	6.8	_	ns			
Turn-On Rise Time (Note 9)	t <sub>r</sub>	_	5.3	_	ns	$V_{DD} = 50V, V_{GS} = 10V$		
Turn-Off Delay Time (Note 9)	t <sub>D(off)</sub>	_	27.5	_	ns	$I_D = 1.0A, R_G \cong 25\Omega$		
Turn-Off Fall Time (Note 9)	t <sub>f</sub>	_	12.3	_	ns	1		


- 7. Measured under pulsed conditions. Pulse width  $\leq 300 \mu s;$  duty cycle  $\leq 2\%$
- 8. For design aid only, not subject to production testing.
  9. Switching characteristics are independent of operating junction temperatures.







# **Typical Characteristics**















**Normalised Curves v Temperature** 



Source-Drain Diode Forward Voltage


V<sub>SD</sub> Source-Drain Voltage (V)

8.0


0.2



## **Typical Characteristics - continued**




Capacitance v Drain-Source Voltage




**Gate-Source Voltage v Gate Charge** 


# **Test Circuits**




Basic gate charge waveform



Gate charge test circuit




Switching time waveforms




Switching time test circuit






# **Package Outline Dimensions**



DIM	M Inches		Millimeters		DIM	Inches		Millimeters		
	Min	Max	Min	Max		Min	Max	Min	Max	
Α	0.086	0.094	2.18	2.39	е	0.090 BSC		2.29 BSC		
A1	_	0.005	-	0.127	Н	0.370	0.410	9.40	10.41	
b	0.020	0.035	0.508	0.89	L	0.055	0.070	1.40	1.78	
b2	0.030	0.045	0.762	1.14	L1	0.108 REF		2.74 REF		
b3	0.205	0.215	5.21	5.46	L2	0.020	0.020 BSC		0.508 BSC	
С	0.018	0.024	0.457	0.61	L3	0.035	0.065	0.89	1.65	
c2	0.018	0.023	0.457	0.584	L4	0.025	0.040	0.635	1.016	
D	0.213	0.245	5.41	6.22	L5	0.045	0.060	1.14	1.52	
D1	0.205	Ī	5.21	-	θ1°	0°	10°	0°	10°	
Е	0.250	0.265	6.35	6.73	θ°	0°	15°	0°	15°	
E1	0.170	-	4.32	-	-	-	-	-	-	

# **Suggested Pad Layout**







#### **IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDING TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

#### LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body, or
  - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2009, Diodes Incorporated

www.diodes.com

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated: ZXMN10A09KTC