



### 0.75A SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

#### **Features**

- Very Low Forward Voltage Drop
- High Conductance
- For Use in DC-DC Converter, PCMCIA, and Mobile Telecommunications Applications
- Lead, Halogen and Antimony Free, RoHS Compliant
  "Green" Device (Notes 3 and 4)
- Qualified to AEC-Q101 Standards for High Reliability

#### **Mechanical Data**

- Case: SOT-23
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Polarity: See Diagram
- Marking Information: See Page 3
- Ordering Information: See Page 3
- Weight: 0.008 grams (approximate)



Top View

# TOP VIEW Device Schematic

#### **Maximum Ratings** $@T_A = 25^{\circ}C$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	40	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	28	V
Average Rectified Current	lo	0.75	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load	IFSM	5.5	A

# Thermal Characteristics

Characteristic	Symbol	Value	Unit
Power Dissipation (Note 1)	PD	350	mW
Typical Thermal Resistance, Junction to Ambient Air (Note 1)	$R_{ heta}JA$	286	°C/W
Operating and Storage Temperature Range	TJ, T <sub>STG</sub>	-55 to +125	°C

# Electrical Characteristics @T<sub>A</sub> = 25°C unless otherwise specified


Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 2)	V <sub>(BR)R</sub>	40	45		V	I <sub>R</sub> = 300uA
Forward Voltage	VF		225 235 290 340 390 420 475	280 310 350 420 490 540 650	mV	$I_{F} = 50mA \\ I_{F} = 100mA \\ I_{F} = 250mA \\ I_{F} = 500mA \\ I_{F} = 750mA \\ I_{F} = 1000mA \\ I_{F} = 1500mA$
Reverse Current (Note 2)	I <sub>R</sub>		50	100	μΑ	$V_R = 30V$
Total Capacitance	CT		175 25		pF p	$V_R = 0V, f = 1.0MHz$ $V_R = 25V, f = 1.0MHz$
Reverse Recovery Time	t <sub>rr</sub>		_	10	ns	$I_F = I_R = 100 \text{mA},$ $I_{rr} = 10 \text{mA}.$ See figure 6.


Notes: 1. Part mounted on FR-4 PC board with recommended pad layout, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.


Short duration pulse test used to minimize self-heating effect.
 No purposefully added lead. Halogen and Antimony Free.

 Product manufactured with Data Code V9 (week 33, 2008) and newer are built with Green Molding Compound. Product manufactured prior to Date Code V9 are built with Non-Green Molding Compound and may contain Halogens or Sb<sub>2</sub>O<sub>3</sub> Fire Retardants.



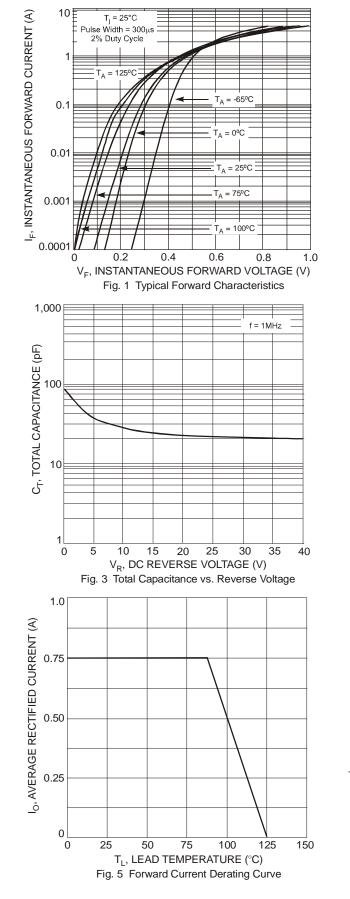

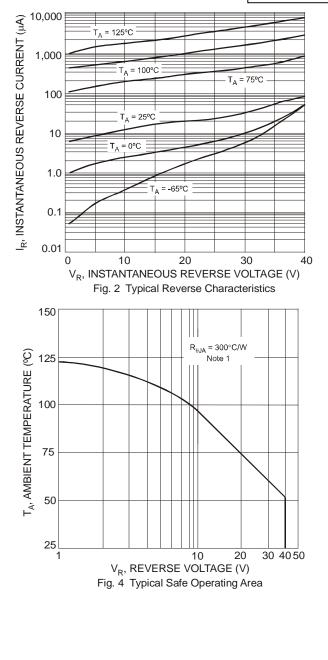



**BAT750** 

t<sub>rr</sub>

**BAT750** 




#### Ordering Information (Note 5)

Part Number	Case	Packaging
BAT750-7-F	SOT-23	3000/Tape & Reel

Notes: 5. For packaging details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.

# **Marking Information**




xxx = Product Type Marking Code (K77 or K79) YM = Date Code Marking Y = Year ex: N = 2002

M = Month ex: 9 = September

Date	Code	Key


Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012
Code	М	Ν	Р	R	S	Т	U	V	W	Х	Y	Z
M 41-				-					-			_
Month	Jan	Feb	Mar	Apr	Мау	Jun	Jul	Aug	Sep	Oct	Nov	Dec

# **Package Outline Dimensions**



SOT-23					
Dim	Min	Max			
Α	0.37	0.51			
В	1.20	1.40			
С	2.30	2.50			
D	0.89	1.03			
F	0.45	0.60			
G	1.78	2.05			
Н	2.80	3.00			
J	0.013	0.10			
κ	0.903	1.10			
L	0.45	0.61			
М	0.085	0.180			
α	0°	8°			
All Dir	All Dimensions in mm				

#### Suggested Pad Layout



Dimensions	Value (in mm)
Z	2.9
Х	0.8
Y	0.9
С	2.0
E	1.35

#### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

#### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated: BAT750-7-F