


High Speed IGBT in NPT-technology

- 30% lower *E*_{off} compared to previous generation
- Short circuit withstand time 10 μs
- Designed for operation above 30 kHz
- NPT-Technology for 600V applications offers:
 - parallel switching capability
 - moderate E_{off} increase with temperature
 - very tight parameter distribution



- Pb-free lead plating; RoHS compliant
- Qualified according to JEDEC¹ for target applications
- Complete product spectrum and PSpice Models : http://www.infineon.com/igbt/





Туре	V _{CE}	Ic	E _{off)}	T j	Marking	Package
SGP30N60HS	600V	30	480µJ	150°C	G30N60HS	PG-TO-220-3-1
SGW30N60HS	600V	30	480µJ	150°C	G30N60HS	PG-TO-247-3

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V _{CE}	600	V
DC collector current	I _C		Α
$T_{\rm C}$ = 25°C		41	
$T_{\rm C}$ = 100°C		30	
Pulsed collector current, t_p limited by T_{jmax}	I _{Cpuls}	112	
Turn off safe operating area	-	112	
$V_{\text{CE}} \le 600 \text{V}, \ T_{\text{j}} \le 150^{\circ} \text{C}$			
Avalanche energy single pulse $I_{\rm C}$ = 20A, $V_{\rm CC}$ =50V, $R_{\rm GE}$ =25 Ω start $T_{\rm J}$ =25 $^{\circ}$ C	EAS	165	mJ
Gate-emitter voltage static transient (t_p <1 μ s, D <0.05)	V _{GE}	±20 ±30	V
Short circuit withstand time ²⁾	tsc	10	μS
$V_{\rm GE}$ = 15V, $V_{\rm CC} \le 600$ V, $T_{\rm j} \le 150$ °C			
Power dissipation	P _{tot}	250	W
$T_{\rm C}$ = 25°C			
Operating junction and storage temperature	T _j , T _{stg}	-55+150	°C
Time limited operating junction temperature for $t < 150h$	$T_{j(tl)}$	175	
Soldering temperature, 1.6mm (0.063 in.) from case for 10s	-	260	

¹ J-STD-020 and JESD-022 ²⁾ Allowed number of short circuits: <1000; time between short circuits: >1s.



Thermal Resistance

Parameter	Symbol	Conditions	Max. Value	Unit
Characteristic				•
IGBT thermal resistance,	R_{thJC}		0.5	K/W
junction – case				
Thermal resistance,	R_{thJA}	PG-TO-220-3-1	62	
junction – ambient		PG-TO-247-3-21	40	

Electrical Characteristic, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Conditions	Value			Unit
Parameter	Symbol Conditions -		min.	Тур.	max.	
Static Characteristic						
Collector-emitter breakdown voltage	$V_{(BR)CES}$	$V_{\rm GE}$ =0V, $I_{\rm C}$ =500 μ A	600	-	-	V
Collector-emitter saturation voltage	$V_{CE(sat)}$	$V_{\rm GE} = 15 \text{V}, I_{\rm C} = 30 \text{A}$				1
		<i>T</i> _j =25°C		2.8	3.15	
		T _j =150°C		3.5	4.00	
Gate-emitter threshold voltage	$V_{\rm GE(th)}$	$I_{\rm C} = 700 \mu A, V_{\rm CE} = V_{\rm GE}$	3	4	5	
Zero gate voltage collector current	I _{CES}	V _{CE} =600V, V _{GE} =0V				μА
		<i>T</i> _j =25°C	-	-	40	
		T _j =150°C	-	-	3000	
Gate-emitter leakage current	I _{GES}	V _{CE} =0V, V _{GE} =20V	-	-	100	nA
Transconductance	g_{fs}	V _{CE} =20V, I _C =30A	-	20	-	S

Dynamic Characteristic

Input capacitance	Ciss	V _{CE} =25V,	-	1500	pF
Output capacitance	Coss	V _{GE} =0V,	-	150	
Reverse transfer capacitance	Crss	f=1MHz	-	92	
Gate charge	Q _{Gate}	$V_{\rm CC}$ =480V, $I_{\rm C}$ =30A	-	141	nC
		V _{GE} =15V			
Internal emitter inductance	LE	PG-TO-220-3-1	-	7	nH
measured 5mm (0.197 in.) from case		PG-TO-247-3-21		13	
Short circuit collector current ¹⁾	I _{C(SC)}	V_{GE} =15V, t_{SC} ≤10 μ s V_{CC} ≤ 600V, T_{j} ≤ 150°C	-	220	А

¹⁾ Allowed number of short circuits: <1000; time between short circuits: >1s.



Switching Characteristic, Inductive Load, at T_i =25 °C


Parameter	Symbol	Symbol Conditions		Value		
raiailletei	Symbol Conditions		min.	typ.	max.	Unit
IGBT Characteristic						
Turn-on delay time	$t_{d(on)}$	<i>T</i> _i =25°C,	-	20		ns
Rise time	t _r	V_{CC} =400V, I_{C} =30A, V_{GE} =0/15V,	-	21		
Turn-off delay time	$t_{d(off)}$	$R_{\rm G}=11\Omega$	ı	250		
Fall time	t_{f}	$L_{\sigma_{1}}^{(1)} = 60 \text{nH},$	-	25		
Turn-on energy	Eon	$C_{\sigma}^{(1)} = 40 \mathrm{pF}$ Energy losses include	-	0.60		mJ
Turn-off energy	E_{off}	"tail" and diode	-	0.55		
Total switching energy	Ets	reverse recovery.	-	1.15		

Switching Characteristic, Inductive Load, at T_i =150 °C

Parameter	Symbol	Conditions	Value		Unit	
raiailletei	Syllibol	Conditions	min.	typ.	max.	Ollit
IGBT Characteristic						
Turn-on delay time	$t_{d(on)}$	T _j =150°C	-	16		ns
Rise time	tr	$V_{\rm CC} = 400 \text{V}, I_{\rm C} = 30 \text{A},$	-	13		
Turn-off delay time	$t_{d(off)}$	$V_{\rm GE} = 0/15 V$, $R_{\rm G} = 1.8 \Omega$	-	122		1
Fall time	t _f	$L_{\sigma}^{(1)} = 60 \text{nH},$	-	29		
Turn-on energy	Eon	$C_{\sigma}^{1)}$ =40pF Energy losses include "tail" and diode	-	0.78		mJ
Turn-off energy	E _{off}		-	0.48		
Total switching energy	Ets	reverse recovery.	-	1.26		
Turn-on delay time	$t_{d(on)}$	T _j =150°C	-	20		ns
Rise time	t _r	$V_{\rm CC} = 400 \text{V}, I_{\rm C} = 30 \text{A},$	-	19		
Turn-off delay time	$t_{d(off)}$	$V_{\rm GE}$ =0/15V, $R_{\rm G}$ = 11 Ω $L_{\sigma}^{(1)}$ =60nH, $C_{\sigma}^{(1)}$ =40pF Energy losses include "tail" and diode	-	274		
Fall time	t _f		-	27		
Turn-on energy	Eon		-	0.91		mJ
Turn-off energy	Eoff		-	0.70		
Total switching energy	Ets	reverse recovery.	-	1.61		


 $^{^{\}rm 1)}$ Leakage inductance L_σ and $\,$ Stray capacity ${\it C}_\sigma$ due to test circuit in Figure E.





f, SWITCHING FREQUENCY

Figure 1. Collector current as a function of switching frequency $(T_j \le 150^{\circ}\text{C}, D = 0.5, V_{\text{CE}} = 400\text{V}, V_{\text{GE}} = 0/+15\text{V}, R_{\text{G}} = 11\Omega)$



 V_{CE} , COLLECTOR-EMITTER VOLTAGE

Figure 2. Safe operating area $(D = 0, T_C = 25^{\circ}\text{C}, T_j \le 150^{\circ}\text{C}; V_{GE} = 15\text{V})$




Figure 3. Power dissipation as a function of case temperature $(T_i \le 150^{\circ}\text{C})$






Figure 4. Collector current as a function of case temperature $(V_{GE} \le 15V, T_i \le 150^{\circ}C)$





 V_{CE} , COLLECTOR-EMITTER VOLTAGE

Figure 5. Typical output characteristic $(T_i = 25^{\circ}C)$



 $V_{\rm CE}$, COLLECTOR-EMITTER VOLTAGE

Figure 6. Typical output characteristic $(T_i = 150^{\circ}\text{C})$





Figure 7. Typical transfer characteristic $(V_{CE}=10V)$



 $T_{\rm J}$, JUNCTION TEMPERATURE

Figure 8. Typical collector-emitter saturation voltage as a function of junction temperature $(V_{GE} = 15V)$






Figure 9. Typical switching times as a function of collector current (inductive load, T_J =150°C, V_{CE} =400V, V_{GE} =0/15V, R_G =11 Ω , Dynamic test circuit in Figure E)




Figure 10. Typical switching times as a function of gate resistor (inductive load, T_J =150°C, V_{CE} =400V, V_{GE} =0/15V, I_C =30A, Dynamic test circuit in Figure E)




Figure 11. Typical switching times as a function of junction temperature (inductive load, V_{CE} =400V, V_{GE} =0/15V, I_{C} =30A, R_{G} =11 Ω , Dynamic test circuit in Figure E)




Figure 12. Gate-emitter threshold voltage as a function of junction temperature $(I_C = 0.7 \text{mA})$






Figure 13. Typical switching energy losses as a function of collector current (inductive load, T_J =150°C, V_{CE} =400V, V_{GE} =0/15V, R_G =11 Ω , Dynamic test circuit in Figure E)




Figure 14. Typical switching energy losses as a function of gate resistor (inductive load, T_J =150°C, V_{CE} =400V, V_{GE} =0/15V, I_C =30A, Dynamic test circuit in Figure E)





Figure 15. Typical switching energy losses as a function of junction temperature

(inductive load, $V_{\rm CE}$ =400V, $V_{\rm GE}$ =0/15V, $I_{\rm C}$ =30A, $R_{\rm G}$ =11 Ω , Dynamic test circuit in Figure E)



 $t_{\rm P,\ PULSE\ WIDTH}$ Figure 16. IGBT transient thermal resistance $(D=t_{\rm p}/T)$







Figure 17. Typical gate charge (I_C=30 A)



 V_{CE} , COLLECTOR-EMITTER VOLTAGE

Figure 18. Typical capacitance as a function of collector-emitter voltage $(V_{GE}=0V, f=1 \text{ MHz})$






Figure 19. Short circuit withstand time as a function of gate-emitter voltage (V_{CE}=600V, start at T_J=25°C)




 $V_{\rm GE}$, GATE-EMITETR VOLTAGE

Figure 20. Typical short circuit collector current as a function of gate-emitter voltage $(V_{CE} \le 600\text{V}, \ T_i \le 150^{\circ}\text{C})$




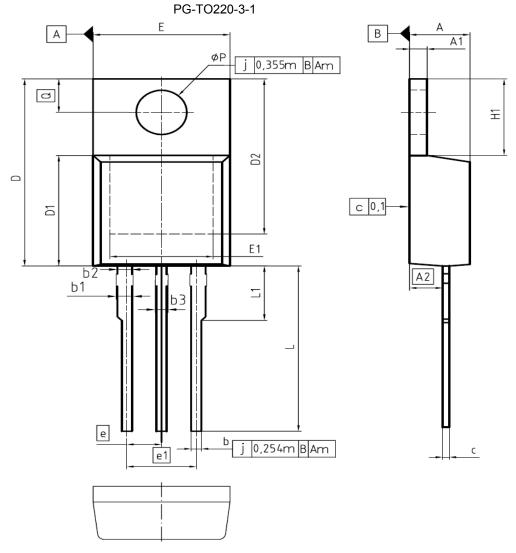


DIM	MILLIMI	ETERS	IES		
DIM	MIN	MAX	MIN	MAX	
Α	4,30	4,57	0.169	0.180	
A1	1.17	1.40	0.046	0.055	
A2	2.15	2.72	0.085	0.107	
b	0.65	0.86	0.026	0.034	
ь1	0.95	1.40	0.037	0.055	
b2	0.95	1,15	0.037	0.045	
b3	0.65	1,15	0.026	0.045	
С	0.33	0.60	0.013	0.024	
D	14.81	15.95	0.583	0.628	
D1	8.51	9,45	0,335	0,372	
D2	12.19	13.10	0.480	0.516	
E	9.70	10.36	0.382	0.408	
E1	6.50	8.60	0,256	0.339	
е	2.5	54	0.1	00	
e1	5.0)8	0.2	.00	
N	;	3	3	3	
H1	5.90	6.90	0.232	0.272	
L	13.00	14.00	0.512	0.551	
L1	-	4.80	-	0.189	
øΡ	3.60	3.89	0.142	0.153	
Q	2.60	3.00	0.102	0.118	





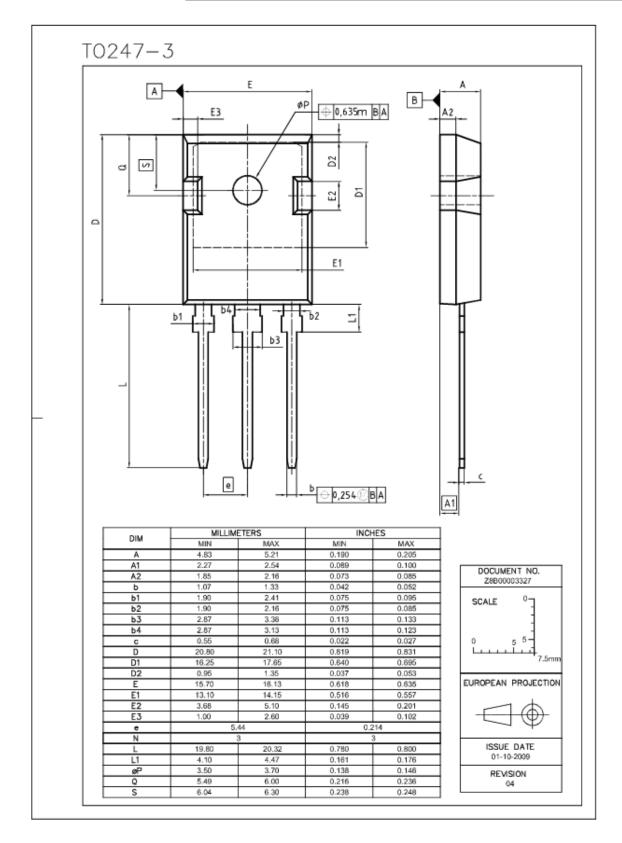



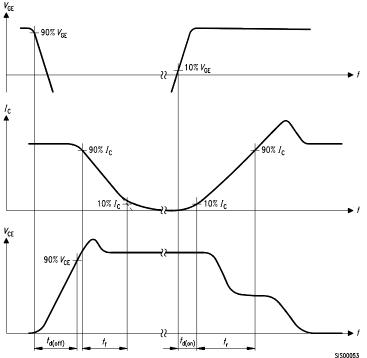




Figure D. Thermal equivalent circuit

Figure A. Definition of switching times

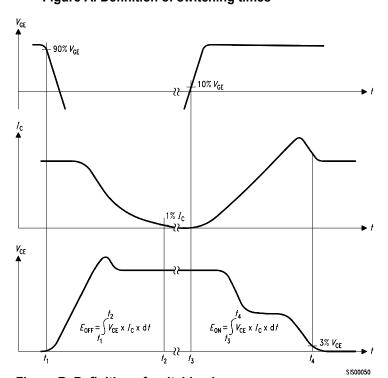


Figure B. Definition of switching losses




Figure E. Dynamic test circuit Leakage inductance L_{σ} =60nH and Stray capacity C_{σ} =40pF.



Published by Infineon Technologies AG 81726 Munich, Germany © 2008 Infineon Technologies AG All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office. Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Infineon: SGP30N60HS