Schottky barrier single diode in small SOD123F package 25 July 2012 Product data sheet

## 1. Product profile

## 1.1 General description

Planar Schottky barrier diode with an integrated guard ring for stress protection, encapsulated in a SOD123F small and flat lead Surface-Mounted Device (SMD) plastic package.

### **1.2 Features and benefits**

- Low forward voltage
- Low capacitance
- AEC-Q101 qualified

## 1.3 Applications

- Ultra high-speed switching
- Voltage clamping
- Line termination
- Inverse-polarity protection

## 1.4 Quick reference data

Table 1. C	Quick reference data					
Symbol	Parameter	Conditions	Min	Тур	Мах	Unit
l <sub>F</sub>	forward current		-	-	200	mA
V <sub>R</sub>	reverse voltage		-	-	30	V
V <sub>F</sub>	forward voltage	I <sub>F</sub> = 10 mA; pulsed; t <sub>p</sub> ≤ 300 μs; $\delta \le 0.02$ ; T <sub>amb</sub> = 25 °C	-	-	400	mV

## 2. Pinning information

Table 2.	Pinning	information		
Pin	Symbol	Description	Simplified outline	Graphic symbol
1	К	cathode[1]		K 🛃 A
2	А	anode		aaa-003679
			SOD123F	

[1] The marking bar indicates the cathode.





Schottky barrier single diode in small SOD123F package

#### **Ordering information** 3.

Table 3. Ordering in	formation		
Type number	Package		
	Name	Description	Version
BAT54H	SOD123F	plastic surface-mounted package; 2 leads	SOD123F

#### Marking 4.

Table 4.   Marking codes	
Type number	Marking code
BAT54H	AG

#### 5. **Limiting values**

#### Table 5. **Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
V <sub>R</sub>	reverse voltage			-	30	V
l <sub>F</sub>	forward current			-	200	mA
I <sub>FRM</sub>	repetitive peak forward current	t <sub>p</sub> ≤ 1 s; δ ≤ 0.5		-	300	mA
I <sub>FSM</sub>	non-repetitive peak forward current	$t_p \le 10 \text{ ms; } T_{j(init)} = 25 ^\circ\text{C}$		-	600	mA
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> = 25 °C	[1]	-	375	mW
Tj	junction temperature			-	125	°C
T <sub>amb</sub>	ambient temperature			-65	125	°C
T <sub>stg</sub>	storage temperature			-65	150	°C

[1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

#### **Thermal characteristics** 6.

Table 6. The	ermal characteristics						
Symbol	Parameter	Conditions		Min	Тур	Max	Unit
R <sub>th(j-a)</sub>	thermal resistance from junction to ambient	in free air	[1]	-	-	330	K/W
R <sub>th(j-sp)</sub>	thermal resistance from junction to solder point		[2]	-	-	70	K/W
BAT54H		All information provided in this document is subject to legal disclaimers.			© NXF	B.V. 2012. All	rights reserved


#### Schottky barrier single diode in small SOD123F package

[1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

[2] Soldering point of cathode tab.

## 7. Characteristics


Table 7. Cha	racteristics					
Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V <sub>F</sub> forward voltage	forward voltage	$I_F$ = 0.1 mA; pulsed; t <sub>p</sub> ≤ 300 μs; δ ≤ 0.02 ; T <sub>amb</sub> = 25 °C	-	-	240	mV
		$I_F$ = 1 mA; pulsed; t <sub>p</sub> ≤ 300 μs; δ ≤ 0.02 ; T <sub>amb</sub> = 25 °C	-	-	320	mV
		I <sub>F</sub> = 10 mA; pulsed; t <sub>p</sub> ≤ 300 μs; $\delta \le 0.02$ ; T <sub>amb</sub> = 25 °C	-	-	400	mV
		I <sub>F</sub> = 30 mA; pulsed; t <sub>p</sub> ≤ 300 μs; $\delta \le 0.02$ ; T <sub>amb</sub> = 25 °C	-	-	500	mV
		I <sub>F</sub> = 100 mA; pulsed; t <sub>p</sub> ≤ 300 μs; $\delta \le 0.02$ ; T <sub>amb</sub> = 25 °C	-	-	800	mV
I <sub>R</sub>	reverse current	V <sub>R</sub> = 25 V; T <sub>amb</sub> = 25 °C	-	-	2	μA
C <sub>d</sub>	diode capacitance	f = 1 MHz; $T_{amb}$ = 25 °C; $V_R$ = 1 V	-	-	10	pF

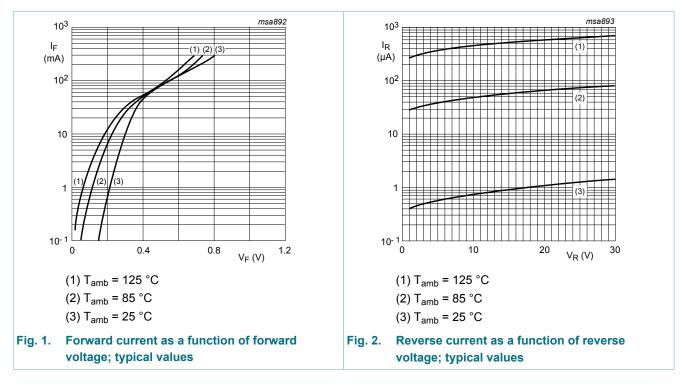

## **NXP Semiconductors**

# BAT54H

#### Schottky barrier single diode in small SOD123F package

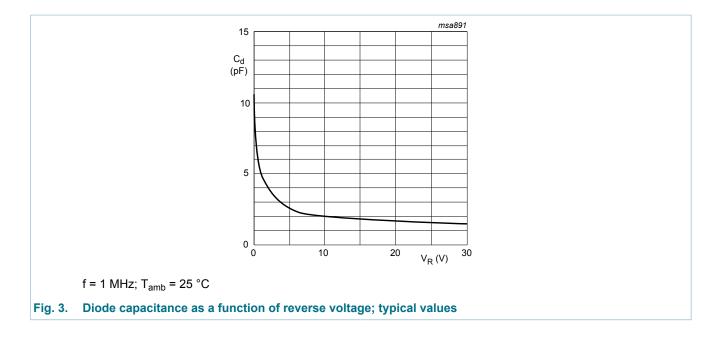


## 8. Test information

### 8.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard Q101 - Stress test qualification for discrete semiconductors, and is suitable for use in automotive applications.


## 9. Package outline

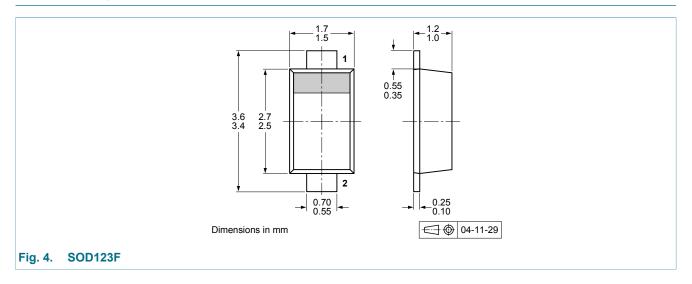

BAT54H

Schottky barrier single diode in small SOD123F package

## **10. Soldering**

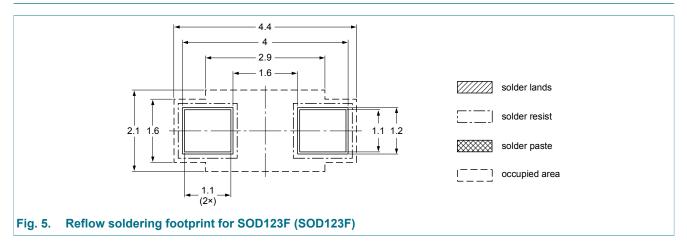

## **11. Revision history**

Table 8. Revision h	nistory				
Data sheet ID	Release date	Data sheet status	Change notice	Supersedes	
BAT54H v.3	20120725	Product data sheet	-	BAT54H v.2	
<ul> <li>Modifications:</li> <li>The format of this document has been redesigned to comply with the new identity guideline of NXP Semiconductors.</li> <li>Legal texts have been adapted to the new company name where appropriate.</li> <li>Section "Test information" added</li> </ul>					
BAT54H v.2	20100128	Product data sheet	-	BAT54H v.1	
BAT54H v.1	20050407	Product data sheet	-		

#### Schottky barrier single diode in small SOD123F package

## 12. Legal information

#### 12.1 Data sheet status

Document status [1][2]	Product status [ <u>3]</u>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

Please consult the most recently issued document before initiating or [1] completing a design.

The term 'short data sheet' is explained in section "Definitions". [2]

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <u>http://www.nxp.com</u>.

### 12.2 Definitions

Preview — The document is a preview version only. The document is still subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 12.3 Disclaimers

Limited warranty and liability - Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors.

Right to make changes - NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications - This NXP Semiconductors product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values - Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale - NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

Product data sheet

#### Schottky barrier single diode in small SOD123F package

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

## 12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Adelante, Bitport, Bitsound, CoolFlux, CoReUse, DESFire, EZ-HV, FabKey, GreenChip, HiPerSmart, HITAG, I<sup>2</sup>C-bus logo, ICODE, I-CODE, ITEC, Labelution, MIFARE, MIFARE Plus, MIFARE Ultralight, MoReUse, QLPAK, Silicon Tuner, SiliconMAX, SmartXA, STARplug, TOPFET, TrenchMOS, TriMedia and UCODE — are trademarks of NXP B.V.

**HD Radio** and **HD Radio** logo — are trademarks of iBiquity Digital Corporation.

BAT54H

#### Schottky barrier single diode in small SOD123F package

## 13. Contents

1	Product profile1
1.1	General description1
1.2	Features and benefits1
1.3	Applications1
1.4	Quick reference data1
2	Pinning information1
3	Ordering information2
4	Marking2
5	Limiting values2
6	Thermal characteristics2
7	Characteristics
8	Test information4
8.1	Quality information
9	Package outline 4
10	Soldering5
11	Revision history5
12	Legal information6
12.1	Data sheet status 6
12.2	Definitions6
12.3	Disclaimers6
12.4	Trademarks7

#### © NXP B.V. 2012. All rights reserved

For more information, please visit: http://www.nxp.com For sales office addresses, please send an email to: salesaddresses@nxp.com Date of release: 25 July 2012

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NXP: BAT54H,115