Product data sheet

## 1. Product profile

#### 1.1 General description

Planar Schottky barrier diode with an integrated guard ring for stress protection, encapsulated in a small SOT23 (TO-236AB) Surface-Mounted Device (SMD) plastic package.

#### 1.2 Features and benefits

- Low forward voltage
- Low capacitance
- AEC-Q101 qualified

#### 1.3 Applications

- Ultra high-speed switching
- Line termination

- Voltage clamping
- Reverse polarity protection

#### 1.4 Quick reference data

Table 1. Quick reference data

 $T_{amb} = 25$  °C unless otherwise specified.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
$V_{R}$	reverse voltage		-	-	40	V
V <sub>F</sub>	forward voltage	$I_F = 500 \text{ mA}$	<u>[1]</u> _	-	550	mV
I <sub>R</sub>	reverse current	$V_{R} = 35 \text{ V}$	<u>[1]</u> _	-	100	μΑ

<sup>[1]</sup> Pulse test:  $t_p \le 300~\mu s;~\delta \le 0.02.$ 

## 2. Pinning information

Table 2. Pinning

	3			
Pin	Description	Simplified outline	Graphic symbol	
1	anode			
2	not connected		3	
3	cathode	1 2	1 2 n.c. 006aaa436	



#### Schottky barrier diode

# 3. Ordering information

Table 3. Ordering information

Type number	Package		
	Name	Description	Version
BAT720	-	plastic surface-mounted package; 3 leads	SOT23

## 4. Marking

Table 4. Marking codes

Type number	Marking code[1]
BAT720	L6*

<sup>[1] \* =</sup> placeholder for manufacturing site code.

## 5. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
$V_R$	reverse voltage		-	40	V
I <sub>F</sub>	forward current		-	500	mA
I <sub>FSM</sub>	non-repetitive peak forward current	square wave; t <sub>p</sub> < 10 ms	<u>[1]</u> -	2	Α
P <sub>tot</sub>	total power dissipation	$T_{amb} \le 25  ^{\circ}C$	[2] -	200	mW
T <sub>j</sub>	junction temperature		-	125	°C
T <sub>amb</sub>	ambient temperature		<b>–55</b>	+125	°C
T <sub>stg</sub>	storage temperature		-65	+150	°C

<sup>[1]</sup>  $T_i = 25$  °C before surge.

#### 6. Thermal characteristics

Table 6. Thermal characteristics

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
R <sub>th(j-a)</sub>	thermal resistance from junction to ambient	in free air	<u>[1]</u> -	-	500	K/W

<sup>[1]</sup> Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

<sup>[2]</sup> Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

#### Schottky barrier diode


### 7. Characteristics

Table 7. Characteristics

 $T_i = 25$  °C unless otherwise specified.


Symbol	Parameter	Conditions	Min	Тур	Max	Unit
$V_{F}$	forward voltage	$I_F = 500 \text{ mA}$	<u>[1]</u> _	-	550	mV
I <sub>R</sub>	reverse current	$V_{R} = 35 \text{ V}$	<u>[1]</u> _	-	100	μΑ
		$V_R = 35 \text{ V}; T_j = 100 ^{\circ}\text{C}$	<u>[1]</u> _	-	10	mA
C <sub>d</sub>	diode capacitance	$f = 1 MHz; V_R = 0 V$	60	-	90	pF

[1] Pulse test:  $t_p \leq 300~\mu s;~\delta \leq 0.02.$ 



- (1) T<sub>amb</sub> = 125 °C
- (2)  $T_{amb} = 85 \, ^{\circ}C$
- (3)  $T_{amb} = 25 \, ^{\circ}C$


Fig 1. Forward current as a function of forward voltage; typical values



- (1)  $T_{amb} = 125 \, ^{\circ}C$
- (2)  $T_{amb} = 85 \, ^{\circ}C$
- (3)  $T_{amb} = 25 \, ^{\circ}C$

Fig 2. Reverse current as a function of reverse voltage; typical values

#### Schottky barrier diode

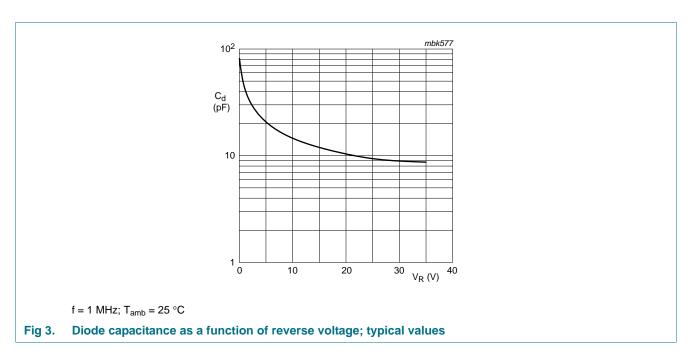


#### 8. Test information

## 8.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard *Q101 - Stress test qualification for discrete semiconductors*, and is suitable for use in automotive applications.

Schottky barrier diode

## 9. Package outline

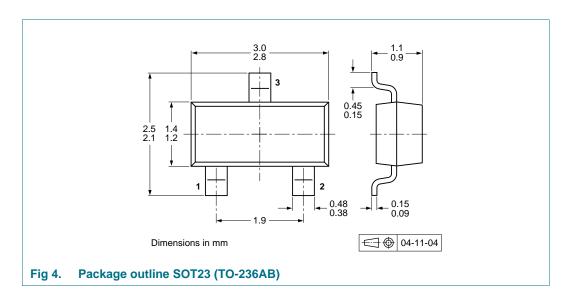

# 10. Packing information

Table 8. Packing methods


The indicated -xxx are the last three digits of the 12NC ordering code.[1]

Type number	Package	Description	Packing quantity	
			3000	10000
BAT720	SOT23	4 mm pitch, 8 mm tape and reel	-215	-235

<sup>[1]</sup> For further information and the availability of packing methods, see Section 14.

#### Schottky barrier diode

## 11. Soldering

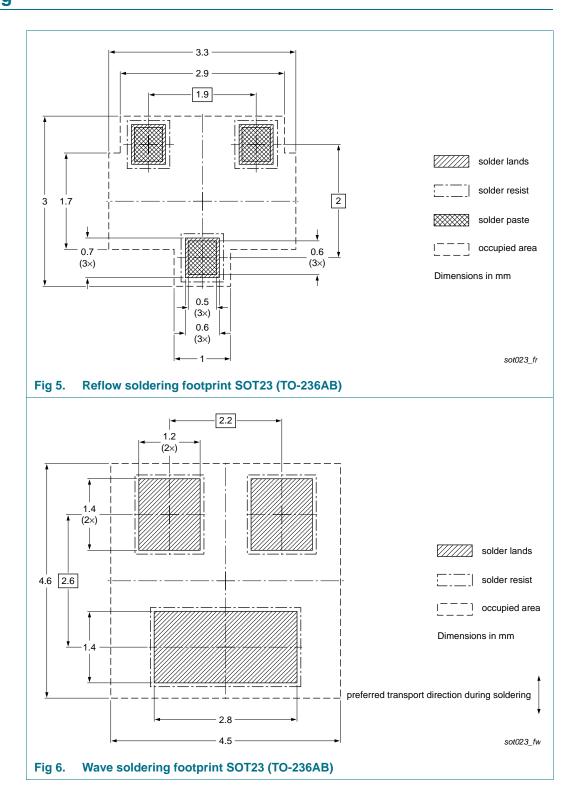

## Schottky barrier diode

# 12. Revision history

#### Table 9. Revision history

Release date	Data sheet status	Change notice	Supersedes		
20121114	Product data sheet	-	BAT720 v.3		
		redesigned to comply w	ith the new identity		
<ul> <li>Legal texts have been adapted to the new company name where appropriate.</li> </ul>					
Section 1: updated					
Section 4: updated					
<ul> <li><u>Table 5</u>: added ambient temperature T<sub>amb</sub> and total power dissipation P<sub>tot</sub></li> </ul>					
• Figure 2: updated					
Section 8 "Test information": added					
<ul> <li>Figure 4: replaced by minimized package outline drawing</li> </ul>					
<ul> <li>Section 10 "Packing information": added</li> </ul>					
Section 11 "Soldering": added					
Section 13	"Legal information": updated	t l			
20030325	Product data sheet	-	BAT720 v.2		
19990526	Product specification	-	BAT720 v.1		
	20121114  The format guidelines of Legal texts Section 1: 0 Section 4: 0 Table 5: add Figure 2: up Section 8 " Figure 4: re Section 10 Section 11 Section 13	Product data sheet  The format of this document has been a guidelines of NXP Semiconductors.  Legal texts have been adapted to the new Section 1: updated  Section 4: updated  Table 5: added ambient temperature Table 5: added ambient temperature Table 5: added ambient temperature Table 5: updated  Section 8 "Test information": added  Figure 4: replaced by minimized package Section 10 "Packing information": added  Section 11 "Soldering": added  Section 13 "Legal information": updated	The format of this document has been redesigned to comply we guidelines of NXP Semiconductors.  Legal texts have been adapted to the new company name where Section 1: updated  Section 4: updated  Table 5: added ambient temperature Tamb and total power disses Figure 2: updated  Section 8 "Test information": added  Figure 4: replaced by minimized package outline drawing  Section 10 "Packing information": added  Section 11 "Soldering": added  Section 13 "Legal information": updated		

Schottky barrier diode

### 13. Legal information

#### 13.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

#### 13.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### 13.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications — This NXP Semiconductors product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nxp.com/profile/terms">http://www.nxp.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

BAT720

#### Schottky barrier diode

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

#### 13.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

#### 14. Contact information

For more information, please visit: <a href="http://www.nxp.com">http://www.nxp.com</a>

For sales office addresses, please send an email to: salesaddresses@nxp.com

**BAT720 NXP Semiconductors** 

### Schottky barrier diode

## 15. Contents

1	Product profile
1.1	General description 1
1.2	Features and benefits
1.3	Applications 1
1.4	Quick reference data 1
2	Pinning information 1
3	Ordering information 2
4	Marking 2
5	Limiting values 2
6	Thermal characteristics 2
7	Characteristics 3
8	Test information 4
8.1	Quality information 4
9	Package outline 5
10	Packing information 5
11	Soldering 6
12	Revision history 7
13	Legal information 8
13.1	Data sheet status 8
13.2	Definitions 8
13.3	Disclaimers
13.4	Trademarks 9
14	Contact information 9
15	Contents

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NXP:

BAT720,235 BAT720,215