
DISCRETE SEMICONDUCTORS

DATA SHEET



BZA456AQuadruple ESD transient voltage suppressor

Product data sheet Supersedes data of 1998 Oct 30



Quadruple ESD transient voltage suppressor

BZA456A

FEATURES

- ESD rating >8 kV, according to IEC1000-4-2
- SOT457 surface mount package
- · Common anode configuration
- Non-clamping range -0.5 to 5.6 V
- Maximum reverse peak power dissipation:
 24 W at t_p = 1 ms
- Maximum clamping voltage at peak pulse current:
 8 V at I_{ZSM} = 3 A.

APPLICATIONS


- · Computers and peripherals
- · Audio and video equipment
- · Communication systems
- · Medical equipment.

DESCRIPTION

Monolithic transient voltage suppressor diode in a six lead SOT457 (SC-74) package for 4-bit wide ESD transient suppression at 5.6 V level.

PINNING

PIN	DESCRIPTION			
1	cathode 1			
2	common			
3	cathode 2			
4	cathode 3			
5	common			
6	cathode 4			

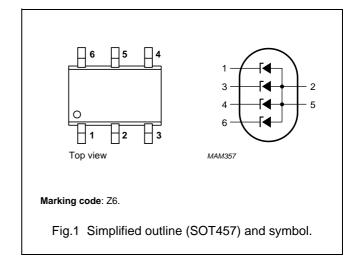

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS		MAX.	UNIT
Per diode					
I _Z	working current	T _s = 60 °C; note 1	_	note 2	mA
IF	continuous forward current	T _s = 60 °C	_	100	mA
I _{FSM}	non-repetitive peak forward current	t _p = 1 ms; square pulse	_	3.75	Α
I _{ZSM}	non-repetitive peak reverse current	t _p = 1 ms; square pulse; see Fig.2	_	3	Α
P _{tot}	total power dissipation	T _s = 60 °C; see Fig.3	_	720	mW
P _{ZSM}	non repetitive peak reverse power dissipation	square pulse; t _p = 1 ms; see Fig.4	_	24	W
T _{stg}	storage temperature		-65	+150	°C
T _j	junction temperature		-65	+150	°C

Notes

- 1. T_s is the temperature at the soldering point of the anode pin.
- 2. DC working current limited by Ptot max.

Quadruple ESD transient voltage suppressor

BZA456A

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
R _{th j-s}	thermal resistance from junction to soldering point	one or more diodes loaded	125	K/W

ELECTRICAL CHARACTERISTICS


 $T_j = 25$ °C unless otherwise specified.


SYMBOL	PARAMETER	PARAMETER CONDITIONS				UNIT
Per diode						
Vz	working voltage	I _Z = 1 mA	5.32	5.6	5.88	V
V _F	forward voltage	I _F = 200 mA	-	_	1.3	V
V_{ZSM}	non-repetitive peak reverse voltage	$I_{ZSM} = 3 \text{ A}; t_p = 1 \text{ ms}$	_	_	8	V
I _R	reverse current	V _R = 3 V	_	_	2	μΑ
r _{dif}	differential resistance	I _Z = 250 μA	_	_	1600	Ω
		I _Z = 1 mA	_	_	400	Ω
S _Z	temperature coefficient of working voltage	I _Z = 5 mA	-	1.2	_	mV/K
C _d	diode capacitance	see Fig.5				
		$V_R = 0; f = 1 MHz$	_	_	240	pF
		$V_R = 3 V; f = 1 MHz$	_	-	140	pF


1999 May 25 3


Quadruple ESD transient voltage suppressor

BZA456A

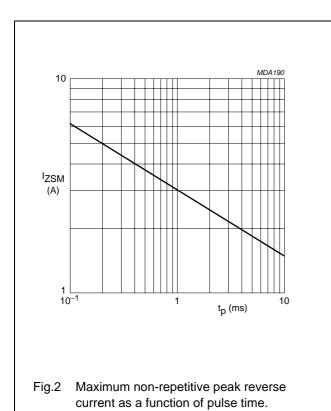

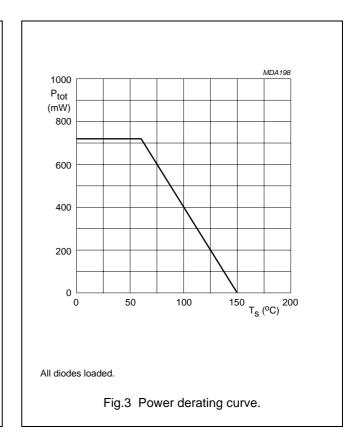


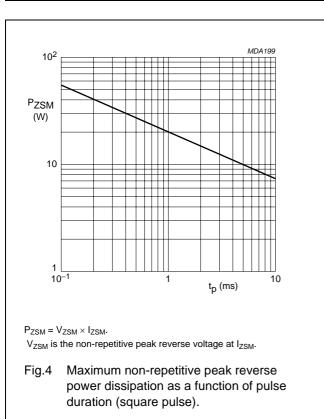

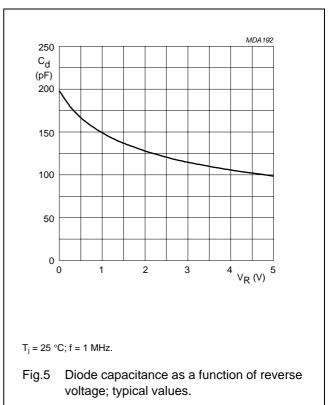

Quadruple ESD transient voltage suppressor

BZA456A

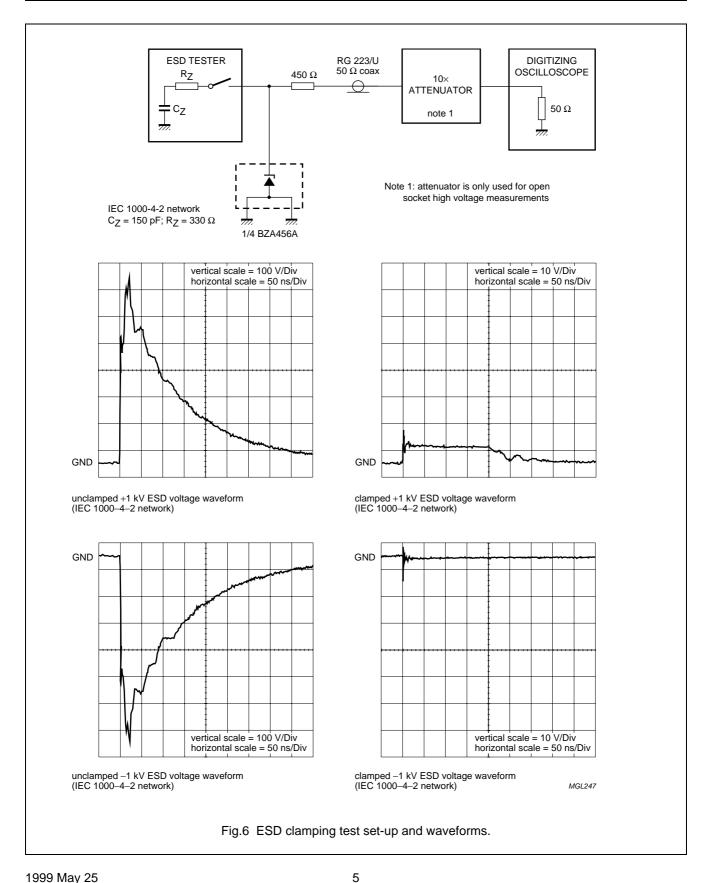


Quadruple ESD transient voltage suppressor


BZA456A

APPLICATION INFORMATION

Typical common anode application

A quadruple transient suppressor in a SOT457 package makes it possible to protect four separate lines using only one package. Two simplified examples are shown in Figs 7 and 8.

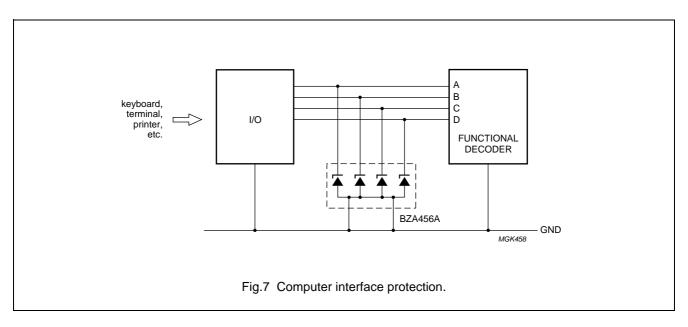

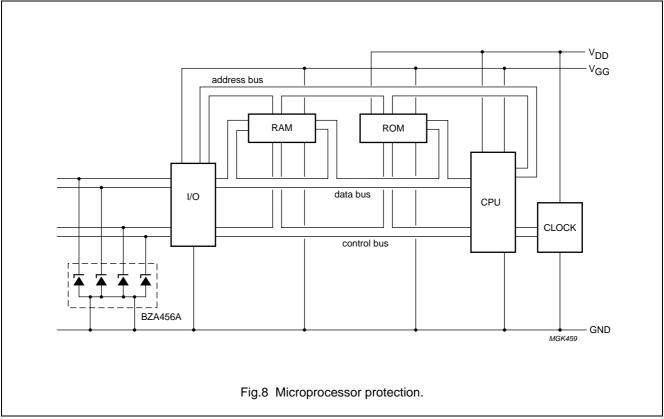

6

Quadruple ESD transient voltage suppressor

BZA456A

Device placement and printed-circuit board layout

Circuit board layout is of extreme importance in the suppression of transients. The clamping voltage of the BZA456A is determined by the peak transient current and the rate of rise of that current (di/dt). Since parasitic inductances can further add to the clamping voltage (V = L di/dt) the series conductor lengths on the printed-circuit board should be kept to a minimum. This includes the lead length of the suppression element.

In addition to minimizing conductor length the following printed-circuit board layout guidelines are recommended:

- 1. Place the suppression element close to the input terminals or connectors.
- 2. Keep parallel signal paths to a minimum.
- 3. Avoid running protection conductors in parallel with unprotected conductors.
- 4. Minimize all printed-circuit board loop areas including power and ground loops.
- 5. Minimize the length of the transient return path to ground.
- 6. Avoid using shared transient return paths to a common ground point.


Quadruple ESD transient voltage suppressor

BZA456A

PACKAGE OUTLINE

Plastic surface mounted package; 6 leads

SOT457

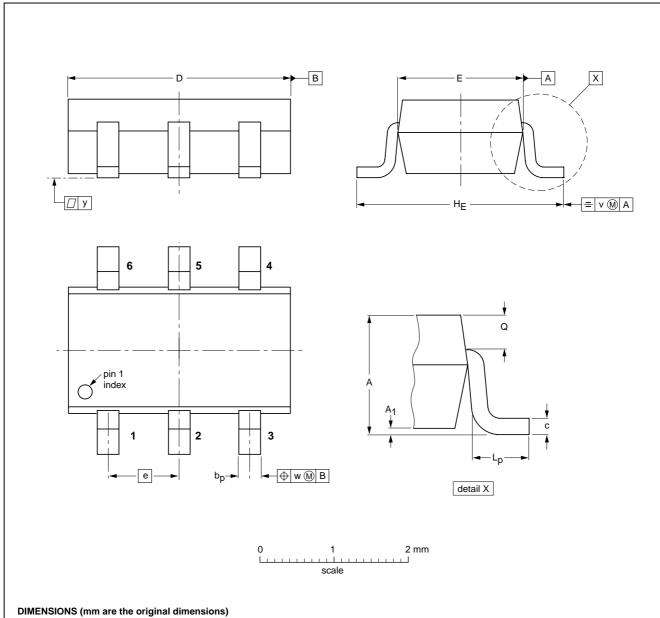

DIMENSIONS	(mm are	the original	dimensions)

UNI	- A	A ₁	bp	С	D	E	е	HE	Lp	Q	V	w	у
mm	1.1 0.9	0.1 0.013	0.40 0.25	0.26 0.10	3.1 2.7	1.7 1.3	0.95	3.0 2.5	0.6 0.2	0.33 0.23	0.2	0.2	0.1

OUTLINE		REFER	REFERENCES EUROPEAN			ISSUE DATE
VERSION	IEC	JEDEC	EIAJ		PROJECTION	ISSUE DATE
SOT457			SC-74			97-02-28 01-05-04

Quadruple ESD transient voltage suppressor

BZA456A

DATA SHEET STATUS

DOCUMENT STATUS ⁽¹⁾	PRODUCT STATUS ⁽²⁾	DEFINITION
Objective data sheet	Development	This document contains data from the objective specification for product development.
Preliminary data sheet	Qualification	This document contains data from the preliminary specification.
Product data sheet	Production	This document contains the product specification.

Notes

- 1. Please consult the most recently issued document before initiating or completing a design.
- The product status of device(s) described in this document may have changed since this document was published
 and may differ in case of multiple devices. The latest product status information is available on the Internet at
 URL http://www.nxp.com.

DISCLAIMERS

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions

above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

NXP Semiconductors

Customer notification

This data sheet was changed to reflect the new company name NXP Semiconductors, including new legal definitions and disclaimers. No changes were made to the technical content, except for package outline drawings which were updated to the latest version.

Contact information

For additional information please visit: http://www.nxp.com
For sales offices addresses send e-mail to: salesaddresses@nxp.com

© NXP B.V. 2009

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands 115002/00/03/pp10 Date of release: 1999 May 25 Document order number: 9397 750 05953



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NXP:

BZA456A,125 BZA456A,165 BZA456A,135 BZA456A,115