PEMH2; PUMH2

NPN/NPN resistor-equipped transistors; R1 = 47 k Ω , R2 = 47 k Ω

Rev. 5 — 5 December 2011

Product data sheet

1. Product profile

1.1 General description

NPN/NPN double Resistor-Equipped Transistors (RET) in Surface-Mounted Device (SMD) plastic packages.

Table 1. Product overview

Type number Package		S		PNP/PNP	Package	
	NXP	JEITA	complement	complement	configuration	
PEMH2	SOT666	-	PEMD12	PEMB2	ultra small and flat lead	
PUMH2	SOT363	SC-88	PUMD12	PUMB2	very small	

1.2 Features and benefits

- 100 mA output current capability
- Built-in bias resistors
- Simplifies circuit design
- Reduces component count
- Reduces pick and place costs
- AEC-Q101 qualified

1.3 Applications

- Low current peripheral driver
- Control of IC inputs
- Replaces general-purpose transistors in digital applications

1.4 Quick reference data

Table 2. Quick reference data

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Per transist	or					
V_{CEO}	collector-emitter voltage	open base	-	-	50	V
Io	output current		-	-	100	mA
R1	bias resistor 1 (input)		33	47	61	kΩ
R2/R1	bias resistor ratio		8.0	1	1.2	



2. Pinning information

Table 3. Pinning

141010 01	9		
Pin	Description	Simplified outline	Graphic symbol
1	GND (emitter) TR1		
2	input (base) TR1	6 5 4	6 5 4
3	output (collector) TR2		
4	GND (emitter) TR2		R1 R2
5	input (base) TR2		TR1
6	output (collector) TR1	001aab555	R2 R1
			1 2 3 sym063

3. Ordering information

Table 4. Ordering information

Type number	Package	Package		
	Name	Description	Version	
PEMH2	-	plastic surface-mounted package; 6 leads	SOT666	
PUMH2	SC-88	plastic surface-mounted package; 6 leads	SOT363	

4. Marking

Table 5. Marking codes

Type number	Marking code[1]
PEMH2	Z2
PUMH2	2*H

[1] * = placeholder for manufacturing site code

5. Limiting values


Table 6. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

			· · · · · · · · · · · · · · · · · · ·		
Symbol	Parameter	Conditions	Min	Max	Unit
Per transis	stor				
V_{CBO}	collector-base voltage	open emitter	-	50	V
V_{CEO}	collector-emitter voltage	open base	-	50	V
V_{EBO}	emitter-base voltage	open collector	-	10	V
VI	input voltage				
	positive		-	+40	V
	negative		-	-10	V
Io	output current		-	100	mA
I _{CM}	peak collector current	single pulse; $t_p \le 1 \text{ ms}$	-	100	mA
P _{tot}	total power dissipation	$T_{amb} \le 25 ^{\circ}C$			
	PEMH2 (SOT666)		[1][2] _	200	mW
	PUMH2 (SOT363)		<u>[1]</u> -	200	mW
Per device)				
P _{tot}	total power dissipation	$T_{amb} \le 25 ^{\circ}C$			
	PEMH2 (SOT666)		[1][2] _	300	mW
	PUMH2 (SOT363)		<u>[1]</u> -	300	mW
T _j	junction temperature		-	150	°C
T _{amb}	ambient temperature		-65	+150	°C
T _{stg}	storage temperature		-65	+150	°C

^[1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

^[2] Reflow soldering is the only recommended soldering method.

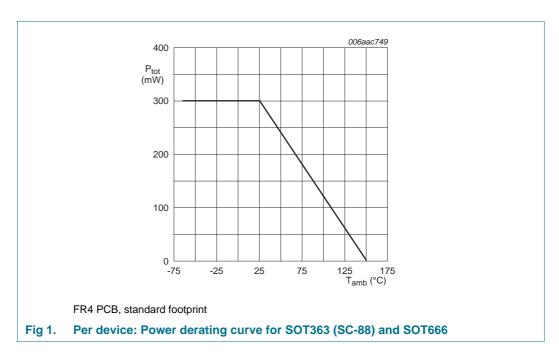


6. Thermal characteristics

Table 7. Thermal characteristics

Parameter	Conditions	tions Min		Max	Unit
Per transistor					
thermal resistance from junction to ambient	in free air				
PEMH2 (SOT666)		[1][2]	-	625	K/W
PUMH2 (SOT363)		<u>[1]</u> _	-	625	K/W
•					
thermal resistance from junction to ambient	in free air				
PEMH2 (SOT666)		[1][2] _	-	417	K/W
PUMH2 (SOT363)		<u>[1]</u> -	-	417	K/W
	thermal resistance from junction to ambient PEMH2 (SOT666) PUMH2 (SOT363) thermal resistance from junction to ambient PEMH2 (SOT666)	thermal resistance from in free air junction to ambient PEMH2 (SOT666) PUMH2 (SOT363) thermal resistance from in free air junction to ambient PEMH2 (SOT666)	thermal resistance from in free air junction to ambient PEMH2 (SOT666) PUMH2 (SOT363) thermal resistance from in free air junction to ambient PEMH2 (SOT666) [1][2] -	thermal resistance from in free air junction to ambient PEMH2 (SOT666) PUMH2 (SOT363) thermal resistance from in free air junction to ambient PEMH2 (SOT666) thermal resistance from in free air junction to ambient PEMH2 (SOT666)	thermal resistance from in free air junction to ambient PEMH2 (SOT666) [1][2] 625 PUMH2 (SOT363) [1] 625 thermal resistance from junction to ambient PEMH2 (SOT666) [1][2] 417


^[1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

^[2] Reflow soldering is the only recommended soldering method.

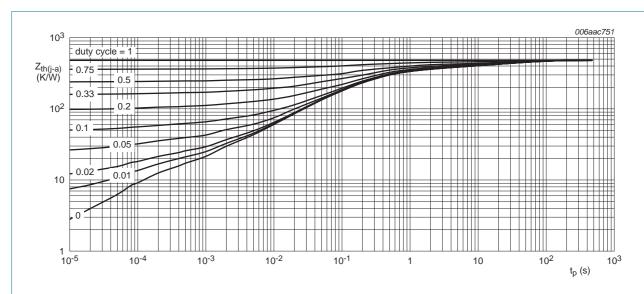

FR4 PCB, standard footprint

Fig 2. Per transistor: Transient thermal impedance from junction to ambient as a function of pulse duration for PEMH2 (SOT666); typical values

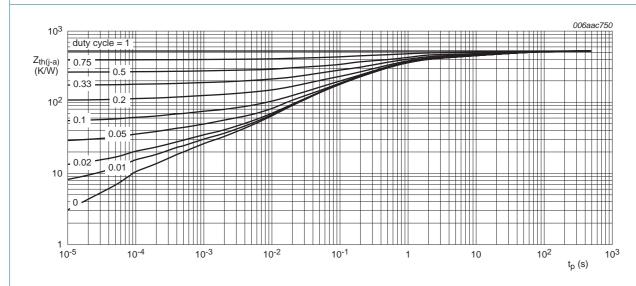

FR4 PCB, standard footprint

Fig 3. Per transistor: Transient thermal impedance from junction to ambient as a function of pulse duration for PUMH2 (SOT363); typical values


7. Characteristics

Table 8. Characteristics

 $T_{amb} = 25$ °C unless otherwise specified.

Symbol	Parameter	Conditions	Mi	n Typ) Max	Unit
Per trans	sistor					
I _{CBO}	collector-base cut-off current	$V_{CB} = 50 \text{ V}; I_E = 0 \text{ A}$	-	-	100	nA
I _{CEO} co	collector-emitter cut-off	$V_{CE} = 30 \text{ V}; I_{B} = 0 \text{ A}$	-	-	1	μΑ
	current	$V_{CE} = 30 \text{ V}; I_{B} = 0 \text{ A};$ $T_{j} = 150 \text{ °C}$	-	-	5	μΑ
I _{EBO}	emitter-base cut-off current	$V_{EB} = 5 \text{ V}; I_{C} = 0 \text{ A}$	-	-	90	μΑ
h _{FE}	DC current gain	$V_{CE} = 5 \text{ V}; I_{C} = 5 \text{ mA}$	80	-	-	
V _{CEsat}	collector-emitter saturation voltage	$I_C = 10 \text{ mA};$ $I_B = 0.5 \text{ mA}$	-	-	150	mV
$V_{I(off)}$	off-state input voltage	$V_{CE} = 5 \text{ V}; I_{C} = 100 \mu\text{A}$	-	1.2	0.8	V
$V_{I(on)}$	on-state input voltage	$V_{CE} = 0.3 \text{ V}; I_{C} = 2 \text{ mA}$	3	1.6	-	V
R1	bias resistor 1 (input)		33	47	61	kΩ
R2/R1	bias resistor ratio		0.0	3 1	1.2	
C _c	collector capacitance	$V_{CB} = 10 \text{ V};$ $I_E = i_e = 0 \text{ A}; f = 1 \text{ MHz}$			2.5	pF
f _T	transition frequency	$V_{CE} = 5 \text{ V}; I_{C} = 10 \text{ mA};$ f = 100 MHz	<u>[1]</u>	230)	MHz

^[1] Characteristics of built-in transistor

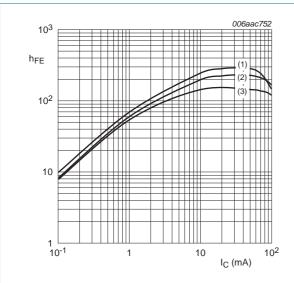


$$V_{CE} = 5 V$$

(1)
$$T_{amb} = 100 \, ^{\circ}C$$

(2)
$$T_{amb} = 25 \, ^{\circ}C$$

(3)
$$T_{amb} = -40 \, ^{\circ}C$$

Fig 4. DC current gain as a function of collector current; typical values

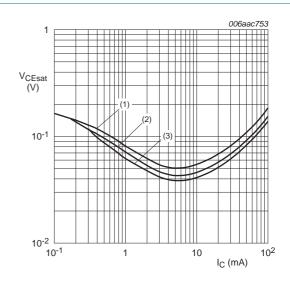


$$I_{\rm C}/I_{\rm B} = 20$$

(1)
$$T_{amb} = 100 \, ^{\circ}C$$

(2)
$$T_{amb} = 25 \, ^{\circ}C$$

(3)
$$T_{amb} = -40 \, ^{\circ}C$$

Collector-emitter saturation voltage as a Fig 5. function of collector current; typical values

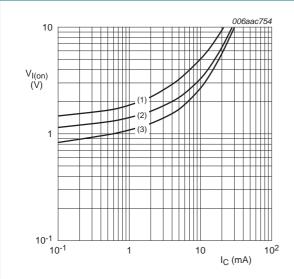


$$V_{CE} = 0.3 \text{ V}$$

(1)
$$T_{amb} = -40 \, ^{\circ}C$$

(2)
$$T_{amb} = 25 \, ^{\circ}C$$

(3)
$$T_{amb} = 100 \, ^{\circ}C$$

Fig 6. On-state input voltage as a function of collector current; typical values

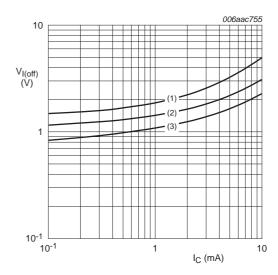


$$V_{CE} = 5 V$$

(1)
$$T_{amb} = -40 \, ^{\circ}C$$

(2)
$$T_{amb} = 25 \, ^{\circ}C$$

(3)
$$T_{amb} = 100 \, ^{\circ}C$$

Fig 7. Off-state input voltage as a function of collector current; typical values

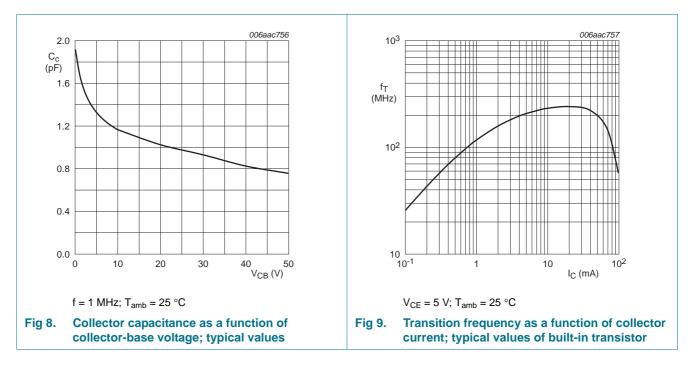


8. Test information

8.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard *Q101 - Stress test qualification for discrete semiconductors*, and is suitable for use in automotive applications.

9. Package outline

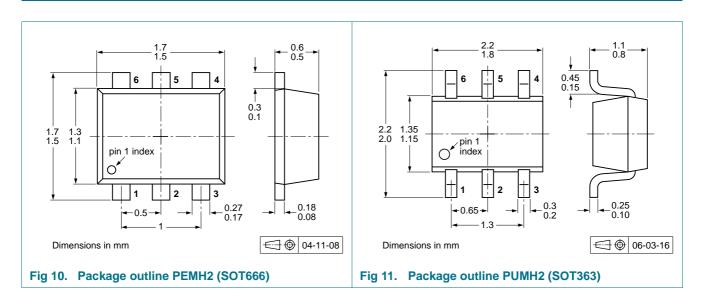

PEMH2_PUMH2

10. Packing information


Table 9. Packing methods


The indicated -xxx are the last three digits of the 12NC ordering code.[1]

Туре	Package	Description		Packing quantity			
number			3000	4000	8000	10000	
PEMH2 SOT666	2 mm pitch, 8 mm tape and reel	-	-	-315	-		
		4 mm pitch, 8 mm tape and reel	-	-115	-	-	
PUMH2 SOT363	4 mm pitch, 8 mm tape and reel; T1	1 -115	-	-	-135		
		4 mm pitch, 8 mm tape and reel; T2	-125	-	-	-165	

- [1] For further information and the availability of packing methods, see Section 14.
- [2] T1: normal taping
- [3] T2: reverse taping

11. Soldering

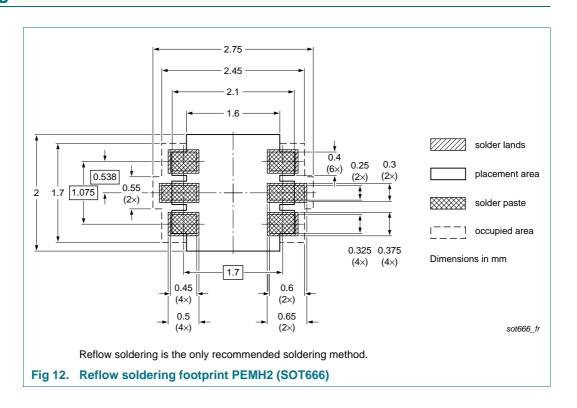

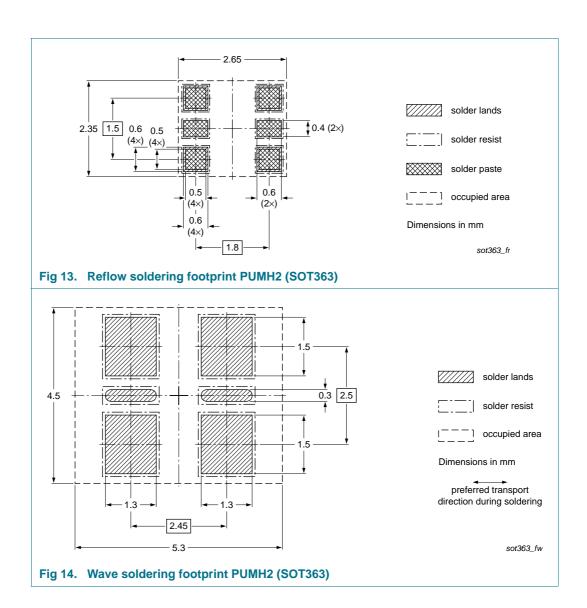

12. Revision history

Table 10. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
PEMH2_PUMH2 v.5	20111205	Product data sheet	-	PEMH2_PUMH2 v.4
Modifications:	• Table 1 "Pro	duct overview": corrected		
PEMH2_PUMH2 v.4	20111116	Product data sheet	-	PEMH2_PUMH2 v.3
PEMH2_PUMH2 v.3	20040414	Product data sheet	-	PEMH2_PUMH2 v.2
PEMH2_PUMH2 v.2	20031002	Product specification	-	PEMH2 v.1 PUMH2 v.1
PEMH2 v.1	20011022	Preliminary specification	-	-
PUMH2 v.1	19990803	Product specification	-	-

13. Legal information

13.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

13.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

13.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

PEMH2_PUMH2

All information provided in this document is subject to legal disclaimers.

© NXP B.V. 2011. All rights reserved.

PEMH2; PUMH2

NPN/NPN resistor-equipped transistors; R1 = 47 k Ω , R2 = 47 k Ω

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

13.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

14. Contact information

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com

15. Contents

1	Product profile
1.1	General description
1.2	Features and benefits
1.3	Applications 1
1.4	Quick reference data 1
2	Pinning information 2
3	Ordering information 2
4	Marking 2
5	Limiting values 3
6	Thermal characteristics 4
7	Characteristics 6
8	Test information 8
8.1	Quality information
9	Package outline 8
10	Packing information 9
11	Soldering 9
12	Revision history 11
13	Legal information
13.1	Data sheet status
13.2	Definitions
13.3	Disclaimers
13.4	Trademarks13
14	Contact information 13
45	Contents

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NXP:

PEMH2,115 PUMH2,115 PEMH2,315