

High voltage fast-switching NPN power transistor

Features

- High voltage capability
- Low spread of dynamic parameters
- Very high switching speed
- Integrated antiparallel collector-emitter diode

Application

■ Electronic ballast for fluorescent lighting

Description

The device is manufactured using high voltage multi-epitaxial planar technology for high switching speeds and high voltage capability.

It uses a cellular emitter structure with planar edge termination to enhance switching speeds while maintaining the wide RBSOA.

The STL series is designed for use in compact fluorescent lamps.




Figure 1. Internal schematic diagram




Table 1. Device summary

Order codes	Marking ⁽¹⁾	Package	Packaging	
STL73D	L73DL	TO-92	Bag	
311/30	L73DH	10-92	Dag	
STL73D-AP	L73DL	TO-92 Ammopac	Ammopack	
	L73DH	10-92	Ammopack	

^{1.} The product is classified in DC current gain group L and group H, see *Table 5: hFE classification*. STMicroelectronics reserves the right to ship from any group according to production availability.

November 2009 Doc ID 15147 Rev 2 1/9

Electrical ratings STL73D

1 Electrical ratings

Table 2. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V _{CES}	Collector-emitter voltage (V _{BE} = 0)	700	V
V _{CEO}	Collector-emitter voltage (I _B = 0)	400	V
V _{EBO}	Emitter-base voltage $(I_C = 0, I_B = 0.5 A, t_P < 10 \mu s)$	V _{(BR)EBO}	٧
I _C	Collector current	1.5	Α
I _{CM}	Collector peak current (t _P < 5 ms)	3	Α
I _B	Base current	0.5	Α
I _{BM}	Base peak current (t _P < 5 ms)	1.5	Α
P _{TOT}	Total dissipation at T _c = 25 °C	1.5	W
T _{STG}	Storage temperature	-65 to 150	°C
TJ	Max. operating junction temperature	150	°C

Table 3. Thermal data

Syml	ol Pa	Parameter		Unit
R _{thJ}	Thermal resistance junction	on-case max	83	°C/W

2 Electrical characteristics

 T_{case} = 25 °C unless otherwise specified.

Table 4. Electrical characteristics

Symbol	Parameter Test conditions		Min.	Тур.	Max.	Unit
I _{CEV}	Collector cut-off current (V _{BE} = - 1.5 V)	V _{CE} = 700 V V _{CE} = 700 V T _C = 125 °C			1 5	mA mA
V _{(BR)EBO}	Emitter-base breakdown voltage $(I_C = 0)$	$II_{-} = 10 \text{ m}\Delta$			18	V
V _{CEO(sus)} (1)	Collector-emitter sustaining voltage (I _B = 0)	I _C = 10 mA	400			V
V _{CE(sat)} (1)	Collector-emitter saturation voltage	$\begin{split} & I_{\text{C}} = 0.3 \text{ A} & I_{\text{B}} = 60 \text{ mA} \\ & I_{\text{C}} = 0.6 \text{ A} & I_{\text{B}} = 120 \text{ mA} \\ & I_{\text{C}} = 1 \text{ A} & I_{\text{B}} = 250 \text{ mA} \end{split}$		0.15 0.25 0.4	0.4 0.6 1	>
V _{BE(sat)} (1)	Base-emitter saturation voltage	I _C = 0.6 A I _B = 120 mA		0.95	1.1	V
h _{FE}	DC current gain	$I_C = 0.6 \text{ A}$ $V_{CE} = 3 \text{ V}$ $I_C = 1.2 \text{ A}$ $V_{CE} = 5 \text{ V}$			21 10	
t _r t _s	Resistive load Rise time Storage time Fall time	$V_{CC} = 125 \text{ V}$ $I_{C} = 1 \text{ A}$ $I_{B(on)} = -I_{B(off)} = 200 \text{ mA}$ $T_{P} = 25 \mu\text{s}$			1 4 0.7	µs µs µs
t _s	Inductive load Storage time	$I_C = 0.3 \text{ A}$ $V_{Clamp} = 300 \text{ V}$ $I_{B(on)} = -I_{B(off)} = 60 \text{ mA}$ L = 3 mH		0.3		μs
V_{F}	Diode forward voltage	I _F = 0.5 A			1.5	V

^{1.} Pulse test: pulse duration \leq 300 μ s, duty cycle \leq 2 %


Table 5. h_{FE} classification

Symbol	Parameter	Group	Value		
			Min.	Max.	Unit
h	DC current gain V _{CE} = 3 V, I _C = 0.6 A	L	10	16	
h _{FE}	$V_{CE} = 3 \text{ V, } I_{C} = 0.6 \text{ A}$	Н	15	21	

Electrical characteristics STL73D


2.1 Test circuits

Figure 2. Resistive load switching test circuit

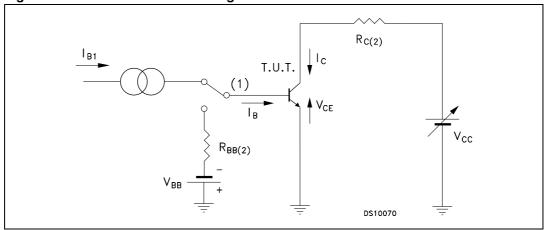

- 1. Fast electronic switch
- 2. Non-inductive resistor

Figure 3. Inductive load switching test circuit

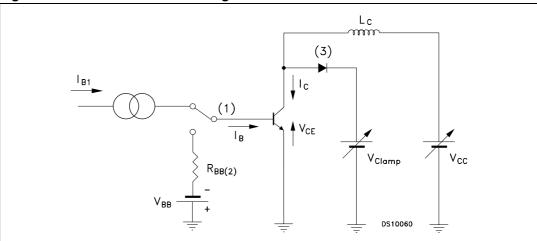


- 1. Fast electronic switch
- 2. Non-inductive resistor
- 3. Fast recovery rectifier

3 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.


TO-92 bulk shipment me	echanical data
------------------------	----------------

Dim.		mm.				
Dim.	Min.	Тур.	Max.			
Α	4.32		4.95			
b	0.36		0.51			
D	4.45		4.95			
E	3.30		3.94			
е	2.41		2.67			
e1	1.14		1.40			
L	12.70		15.49			
R	2.16		2.41			
S1	0.92		1.52			
W	0.41		0.56			
V		5°				

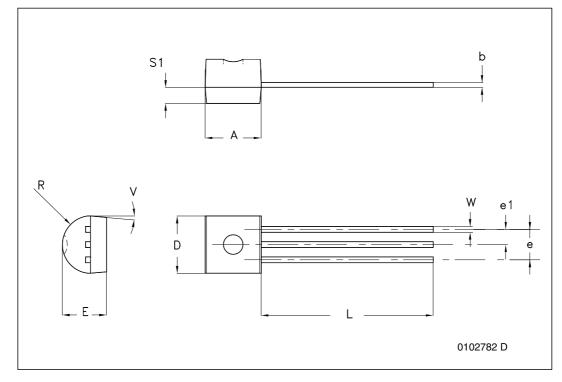

TO-92 ammopack shipment (suffix"-AP") mechanical data

Dim.	mm.			
Dim.	Min.	Тур.	Max.	
A1			4.80	
Т			3.80	
T1			1.60	
T2			2.30	
d			0.48	
P0	12.50	12.70	12.90	
P2	5.65	6.35	7.05	
F1,F2	2.44	2.54	2.94	
F3	4.98	5.08	5.48	
delta H	-2.00		2.00	
W	17.50	18.00	19.00	
W0	5.70	6.00	6.30	
W1	8.50	9.00	9.25	
W2			0.50	
Н	18.50		20.50	
H3	0.5	1	1.5	
H0	15.50	16.00	16.50	
H1			25.00	
D0	3.80	4.00	4.20	
t			0.90	
L			11.00	
l1	3.00			
delta P	-1.00		1.00	

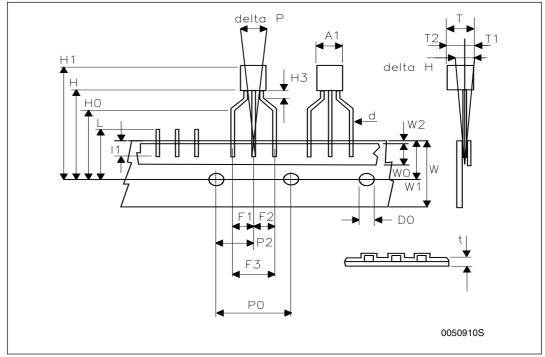

577

Revision history STL73D

4 Revision history

Table 6. Document revision history

Date	Revision	Changes	
12-Nov-2008	1	Initial release.	
25-Nov-2009	2	Added order code STL73D-AP Table 1 on page 1.	

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

STMicroelectronics: