

STGW30NC60VD

40 A, 600 V, very fast IGBT with Ultrafast diode

Features

- High current capability
- High frequency operation up to 50 KHz
- Very soft ultra fast recovery antiparallel diode

Applications

- High frequency inverters, UPS
- Motor drive
- SMPS and PFC in both hard switch and resonant topologies

Description

This device utilizes the advanced Power MESH™ process resulting in an excellent trade-off between switching performance and low on-state behavior.




Figure 1. Internal schematic diagram




Table 1. Device summary

Order code	Marking	Marking Package	
STGW30NC60VD	GW30NC60VD	TO-247 long leads	Tube

Contents STGW30NC60VD

Contents

1	Electrical ratings
2	Electrical characteristics
	2.1 Electrical characteristics (curves)
3	Test circuits
4	Package mechanical data
5	Revision history

STGW30NC60VD Electrical ratings

1 Electrical ratings

Table 2. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V _{CES}	Collector-emitter voltage (V _{GE} = 0)	600	V
I _C ⁽¹⁾	Continuous collector current at T _C = 25 °C	80	Α
I _C ⁽¹⁾	Continuous collector current at T _C = 100 °C	40	Α
I _{CP} ⁽²⁾	Pulsed collector current	150	Α
I _{CL} ⁽³⁾	Turn-off latching current	100	Α
V _{GE}	Gate-emitter voltage	± 20	٧
I _F	Diode RMS forward current at T _C = 25 °C	30	Α
I _{FSM}	Surge not repetitive forward current $t_P = 10$ ms sinusoidal	120	Α
P _{TOT}	Total dissipation at T _C = 25 °C	250	W
T _J	Operating junction temperature	55 1- 450	
T _{STG}	Storage temperature	- 55 to 150	
TL	Maximum lead temperature for soldering purpose for 10 sec	300	°C

1. Calculated according to the iterative formula:

$$I_{C}(T_{C}) = \frac{T_{j(max)} - T_{C}}{R_{thj-c} \times V_{CE(sat)(max)}(T_{j(max)}, I_{C}(T_{C}))}$$

- 2. Pulse width limited by maximum junction temperature and turn-off within RBSOA
- 3. V_{clamp} = 80 % V_{CES} , T_J = 150 °C, R_G = 10 Ω , V_{GE} = 15 V

Table 3. Thermal data

Symbol	Parameter	Value	Unit
В	Thermal resistance junction-case IGBT	0.5	°C/W
R_{thJC}	Thermal resistance junction-case diode	1.5	°C/W
R _{thJA}	Thermal resistance junction-ambient	50	°C/W

Electrical characteristics STGW30NC60VD

2 Electrical characteristics

 T_J = 25 $^{\circ}C$ unless otherwise specified.

Table 4. Static

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
V _{(BR)CES}	Collector-emitter breakdown voltage (V _{GE} = 0)	I _C = 1 mA	600			٧
V _{CE(sat)}	Collector-emitter saturation voltage	V _{GE} = 15 V, I _C =20 A V _{GE} = 15 V, I _C =40 A V _{GE} = 15 V, I _C =80 A,T _j =100 °C V _{GE} = 15 V, I _C =20 A,T _j =125 °C		1.8 2.1 2.9 1.7	2.5	>
V _{GE(th)}	Gate threshold voltage	$V_{CE} = V_{GE}$, $I_{C} = 250 \mu A$	3.75		5.75	٧
I _{CES}	Collector-cut-off current (V _{GE} = 0)	V _{CE} = 600 V V _{CE} = 600 V, T _j = 125 °C			10 1	μA mA
I _{GES}	Gate-emitter leakage current (V _{CE} = 0)	V _{GE} = ± 20V			±100	nA
9 _{fs}	Forward transconductance	V _{CE} = 15 V _, I _C = 20 A		15		S

Table 5. Dynamic

	•					
Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
C _{ies} C _{oes} C _{res}	Input capacitance Output capacitance Reverse transfer capacitance	V _{CE} = 25V, f = 1 MHz, V _{GE} = 0	-	2200 225 50	-	pF pF pF
Q _g Q _{ge} Q _{gc}	Total gate charge Gate-emitter charge Gate-collector charge	V_{CE} = 390V, I_{C} = 20A, V_{GE} = 15V, (see Figure 18)	-	100 16 45	140	nC nC nC

Table 6. Switching on/off (inductive load)

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
t _{d(on)}	Turn-on delay time	V _{CC} =390 V, I _C = 20 A,		31		ns
t _r (di/dt) _{onf}	Current rise time Turn-on current slope	$R_G=3.3 \Omega, V_{GE}=15V$ (see Figure 17)	-	11 1600	-	ns A/us
t _{d(on)}	Turn-on delay time	V _{CC} =390 V, I _C = 20 A,		31		ns
t _r	Current rise time	R_{G} =3.3 Ω , V_{GE} =15 V	-	11.5	-	ns
(di/dt) _{on}	Turn-on current slope	T _j =125°C (see Figure 17)		1500		A/μs

Table 6. Switching on/off (inductive load)

t _{r(Voff)} t _{d(off)} t _f	Off voltage rise time Turn-off delay time Current fall time	V_{CC} =390 V, I_{C} = 20 A, R_{G} =3.3 Ω , V_{GE} =15 V (see Figure 17)	-	28 100 75	-	ns ns ns
t _{r(Voff)} t _{d(off)} t _f	Off voltage rise time Turn-off delay time Current fall time	V_{CC} =390 V, I_{C} = 20 A, R_{G} =3.3 Ω , V_{GE} =15 V T_{j} =125°C (see Figure 17)	-	66 150 130	-	ns ns ns

Table 7. Switching energy (inductive load)

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
E _{on} ⁽¹⁾ E _{off} E _{ts}	Turn-on switching losses Turn-off switching losses Total switching losses	V_{CC} =390 V, I_{C} = 20 A, R_{G} =3.3 Ω , V_{GE} =15 V, (see Figure 19)	-	220 330 550	300 450 750	μJ μJ μJ
E _{on} ⁽¹⁾ E _{off} E _{ts}	Turn-on switching losses Turn-off switching losses Total switching losses	V_{CC} =390 V, I_{C} = 20 A, R_{G} =3.3 Ω , V_{GE} =15 V, T_{J} = 125°C (see Figure 19)	-	450 770 1220	-	րվ Ակ Ակ

Eon is the turn-on losses when a typical diode is used in the test circuit in *Figure 19*. Eon include diode recovery energy. If the IGBT is offered in a package with a co-pak diode, the co-pack diode is used as external diode. IGBTs & Diode are at the same temperature (25°C and 125°C)

Table 8. Collector-emitter diode

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
V _F	Forward on-voltage	$I_F = 20 \text{ A}$ $I_F = 20 \text{ A}, T_j = 125^{\circ}\text{C}$	-	1.8 1.4	2.3	V V
t _{rr} Q _{rr} I _{rrm}	Reverse recovery time Reverse recovery charge Reverse recovery current	I_F = 20 A, V_R = 40 V, T_j = 25°C, di/dt =100 A/ μ s (see Figure 20)	-	44 66 3	-	ns nC A
t _{rr} Q _{rr} I _{rrm}	Reverse recovery time Reverse recovery charge Reverse recovery current	I_F = 2 0A, V_R = 40 V, T_j = 125°C, di/dt =100 A/µs (see Figure 20)	-	88 237 5.4	-	ns nC A

Electrical characteristics STGW30NC60VD

2.1 Electrical characteristics (curves)

Figure 2. Output characteristics




Figure 3. Transfer characteristics





Figure 4. Trans conductance

Figure 5. Collector-emitter on voltage vs temperature








Figure 6. Collector-emitter on voltage vs collector current


Figure 7. Normalized gate threshold vs temperature





577

Figure 8. Normalized breakdown voltage vs Figure 9. Gate charge vs. gate-emitter voltage temperature







Figure 10. Capacitance variations

Figure 11. Switching losses vs temperature








Figure 12. Switching losses vs. gate resistance Figure 13. Switching losses vs collector current






Electrical characteristics STGW30NC60VD

Figure 14. Thermal impedance

Figure 15. Turn-off SOA







Figure 16. Emitter-collector diode characteristics



STGW30NC60VD Test circuits

3 Test circuits

Figure 17. Test circuit for inductive load switching

Figure 18. Gate charge test circuit


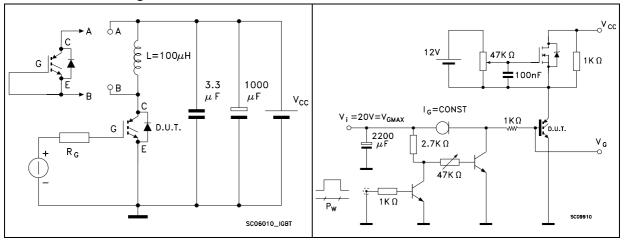


Figure 19. Switching waveforms

Figure 20. Diode recovery times waveform

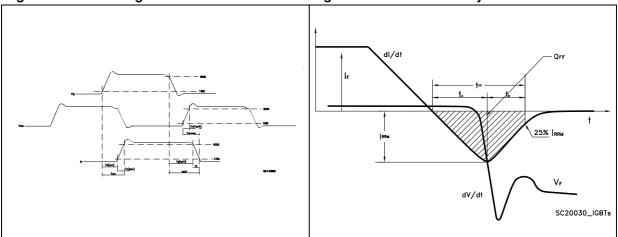

4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

Table 9. TO-247 long leads mechanical data

Dim		mm.	
Dim.	Min.	Тур.	Max.
Α	4.90		5.15
D	1.85		2.10
E	0.55		0.67
F	1.07		1.32
F1	1.90		2.38
F2	2.87		3.38
G		10.90 BSC	
Н	15.77		16.02
L	20.82		21.07
L1	4.16		4.47
L2	5.49		5.74
L3	20.05		20.30
L4	3.68		3.93
L5	6.04		6.29
М	2.27		2.52
V		10°	
V1		3°	
V3		20°	
Dia.	3.55		3.66

10/13 Doc ID 13241 Rev 5

HEAT-SINK PLANE -D L₅ -D|A L₁1 L₃ F2 E BACK VIEW 7395426_E

Figure 21. TO-247 long leads drawing

Revision history STGW30NC60VD

5 Revision history

Table 10. Document revision history

Date	Revision	Changes	
12-Feb-2007	1	First release.	
19-Feb-2007	2	2 Figure 6 has been updated	
12-Mar-2010	3	Inserted I _{FSM} parameter on <i>Table 2: Absolute maximum ratings</i> . Updated <i>Figure 16: Emitter-collector diode characteristics</i> and package mechanical data.	
03-Jan-2011	4	Updated Table 4: Static, Table 8: Collector-emitter diode and Figure 14: Thermal impedance.	
23-Feb-2011	5	Added T _L row <i>Table 2 on page 3</i> .	

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2011 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

STMicroelectronics: STGW30NC60VD