

## STS5DNF60L

## N-channel 60 V, 0.035 Ω 5 A SO-8 STripFET™ II Power MOSFET

#### **Features**

Туре	V <sub>DSS</sub>	R <sub>DS(on)</sub> max	I <sub>D</sub>
STS5DNF60L	60 V	<0.045 Ω	5 A

- Standard outline for easy automated surface mount assembly
- Low threshold drive

#### **Applications**

- Switching applications
  - Automotive



This Power MOSFET is the latest development of STMicroelectronics unique "single feature size" strip-based process. The resulting transistor shows extremely high packing density for low onresistance, rugged avalanche characteristics and less critical alignment steps allowing remarkable manufacturing reproducibility.

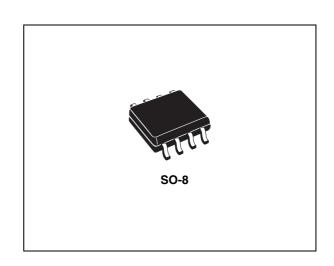


Figure 1. Internal schematic diagram

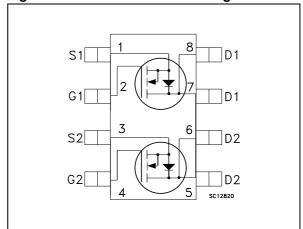


Table 1. Device summary

Order code	Marking	Package	Packaging
STS5DNF60L	S5DNF60L	SO-8	Tape and reel

Contents STS5DNF60L

## **Contents**

1	Electrical ratings	. 3
2	Electrical characteristics	. 4
	2.1 Electrical characteristics (curves)	. 6
3	Test circuits	8
4	Package mechanical data	. 9
5	Revision history	. 11

STS5DNF60L Electrical ratings

# 1 Electrical ratings

Table 2. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V <sub>DS</sub>	Drain-source voltage (V <sub>GS</sub> = 0)	60	V
V <sub>GS</sub>	Gate- source voltage	± 15	٧
I <sub>D</sub>	Drain current (continuous) at T <sub>C</sub> = 25 °C	5	Α
I <sub>D</sub>	Drain current (continuous) at T <sub>C</sub> = 100 °C	3	Α
I <sub>DM</sub> <sup>(1)</sup>	Drain current (pulsed)	20	Α
P <sub>TOT</sub> <sup>(2)</sup>	Total dissipation at T <sub>C</sub> = 25 °C	2	W
T <sub>j</sub> T <sub>stg</sub>	Operating junction temperature Storage temperature	-55 to 150	°C

<sup>1.</sup> Pulse width limited by safe operating area

Table 3. Thermal data

Simbol	Parameter	Value	Unit
R <sub>thj-pcb</sub>	Thermal resistance junction-pcb D.O. <sup>(1)</sup>	62.5	°C/W

<sup>1.</sup> When mounted on inch² FR-4 board, 2 Oz Cu,  $t \le 10$  sec, dual operation

<sup>2.</sup>  $P_{TOT} = 1.6 W$  for single operation

Electrical characteristics STS5DNF60L

## 2 Electrical characteristics

 $(T_{CASE} = 25 \, ^{\circ}C \text{ unless otherwise specified})$ 

Table 4. On /off states

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
V <sub>(BR)DSS</sub>	Drain-source breakdown voltage	I <sub>D</sub> = 250 μA, V <sub>GS</sub> = 0	60			V
I <sub>DSS</sub>	Zero gate voltage drain current (V <sub>GS</sub> = 0)	V <sub>DS</sub> = Max rating V <sub>DS</sub> = Max rating, T <sub>C</sub> =125 °C			1 10	μ <b>Α</b> μ <b>Α</b>
I <sub>GSS</sub>	Gate-body leakage current (V <sub>DS</sub> = 0)	V <sub>GS</sub> = ± 15 V			± 100	nA
V <sub>GS(th)</sub>	Gate threshold voltage	$V_{DS} = V_{GS}, I_{D} = 250 \mu A$	1	1.7	2.5	V
R <sub>DS(on)</sub>	Static drain-source on resistance	$V_{GS} = 10 \text{ V}, I_D = 2 \text{ A}$ $V_{GS} = 4.5 \text{ V}, I_D = 2 \text{ A}$		0.035 0.045	0.045 0.055	Ω Ω

Table 5. Dynamic

	-					
Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
9 <sub>fs</sub>	Forward transconductance	V <sub>DS</sub> =25 V, I <sub>D</sub> =2 A	-	25	-	S
C <sub>iss</sub> C <sub>oss</sub> C <sub>rss</sub>	Input capacitance Output capacitance Reverse transfer capacitance	$V_{DS} = 25 \text{ V, f} = 1 \text{ MHz, V}_{GS} = 0$	-	1030 140 40	-	pF pF pF
Q <sub>g</sub> Q <sub>gs</sub> Q <sub>gd</sub>	Total gate charge Gate-source charge Gate-drain charge	$V_{DD} = 48 \text{ V}, I_D = 4 \text{ A},$ $V_{GS} = 4.5 \text{ V}$ (see Figure 13)	-	15 4 4	-	nC nC nC

Table 6. Switching times

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
t <sub>d(on)</sub> t <sub>r</sub>	Turn-on delay time Rise time	$V_{DD} = 30 \text{ V}, I_{D} = 2.2 \text{ A},$ $R_{G} = 4.7 \Omega, V_{GS} = 10 \text{ V}$ (see <i>Figure 12</i> )	-	15 28	-	ns ns
t <sub>d(off)</sub>	Turn-off delay time Fall time	$V_{DD} = 30 \text{ V}, I_{D} = 2.2 \text{ A},$ $R_{G} = 4.7 \Omega, V_{GS} = 10 \text{ V}$ (see Figure 12)	-	45 10	-	ns ns

Table 7. Source drain diode

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
I <sub>SD</sub>	Source-drain current		-		5	Α
I <sub>SDM</sub> <sup>(1)</sup>	Source-drain current (pulsed)				20	Α
V <sub>SD</sub> (2)	Forward on voltage	$I_{SD} = 4 \text{ A}, V_{GS} = 0$	-		1.2	٧
t <sub>rr</sub>	Reverse recovery time	I <sub>SD</sub> = 4 A, di/dt = 100 A/μs		85		ns
$Q_{rr}$	Reverse recovery charge	V <sub>DD</sub> = 20 V	-	85		nC
I <sub>RRM</sub>	Reverse recovery current	(see Figure 17)		2		Α

<sup>1.</sup> Pulse width limited by safe operating area

<sup>2.</sup> Pulsed: Pulse duration = 300  $\mu$ s, duty cycle 1.5 %

Electrical characteristics STS5DNF60L

### 2.1 Electrical characteristics (curves)

Figure 2. Safe operating area

Figure 3. Thermal impedance

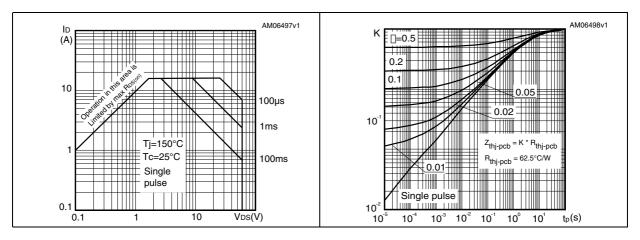


Figure 4. Output characterisics

Figure 5. Transfer characteristics

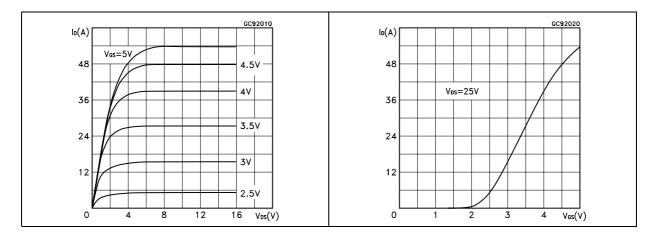


Figure 6. Source-drain diode forward characteristics

Figure 7. Static drain-source on resistance

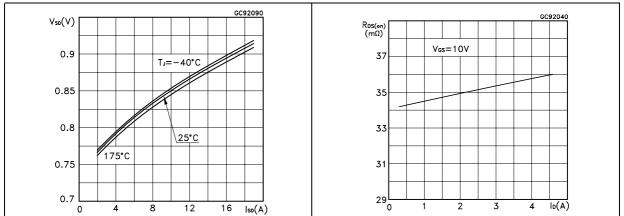


Figure 8. Gate charge vs gate-source voltage Figure 9. Capacitance variations


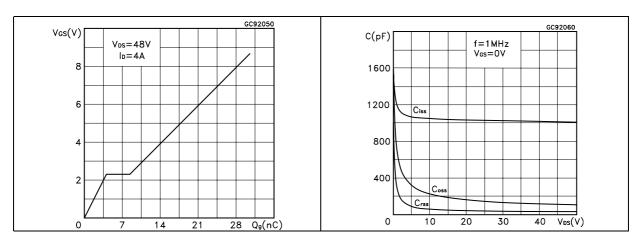


Figure 10. Normalized gate threshold voltage vs temperature

Figure 11. Normalized on resistance vs temperature

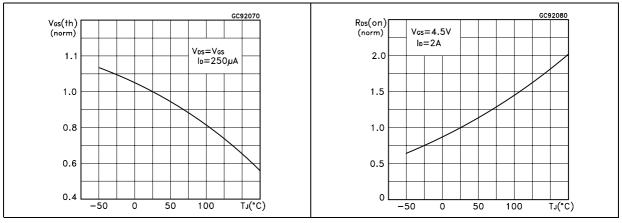

Test circuits STS5DNF60L

### 3 Test circuits

Figure 12. Switching times test circuit for resistive load

Figure 13. Gate charge test circuit

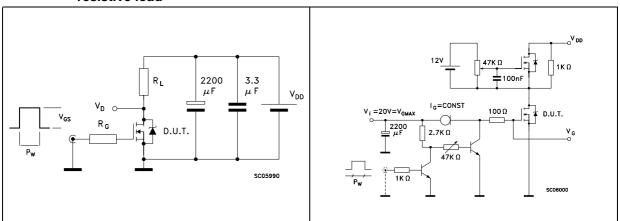


Figure 14. Test circuit for inductive load switching and diode recovery times

Figure 15. Unclamped Inductive load test circuit


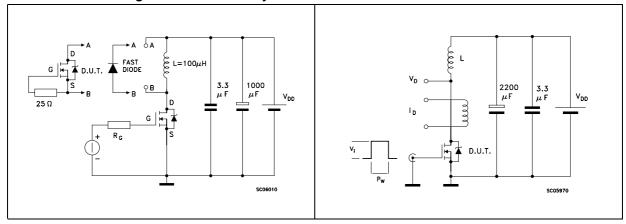


Figure 16. Unclamped inductive waveform

Figure 17. Switching time waveform

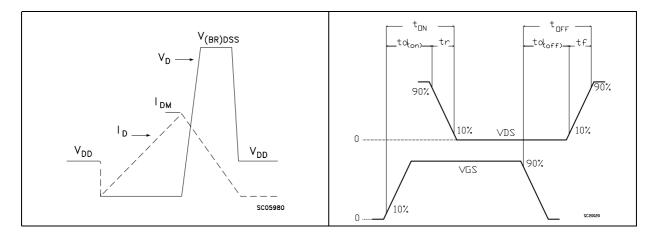


577

## 4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

000		ANICA	1 DA	T A
2U-0	MECH	ANICA	LUA	IΑ

DIM		mm.			inch	
DIM.	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
Α			1.75			0.068
a1	0.1		0.25	0.003		0.009
a2			1.65			0.064
a3	0.65		0.85	0.025		0.033
b	0.35		0.48	0.013		0.018
b1	0.19		0.25	0.007		0.010
С	0.25		0.5	0.010		0.019
c1			45	(typ.)		
D	4.8		5.0	0.188		0.196
E	5.8		6.2	0.228		0.244
е		1.27			0.050	
e3		3.81			0.150	
F	3.8		4.0	0.14		0.157
L	0.4		1.27	0.015		0.050
М			0.6			0.023
S			8 (r	nax.)	•	•

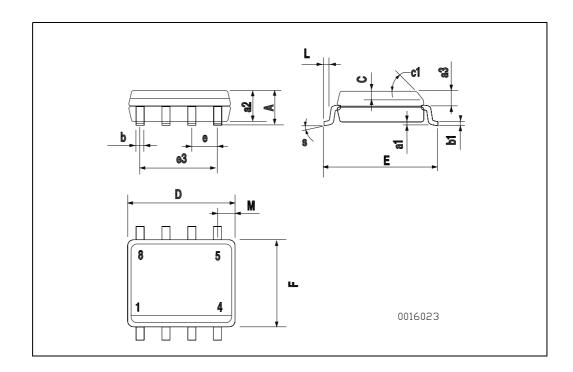

STS5DNF60L Revision history

# 5 Revision history

Table 8. Document revision history

Date	Revision	Changes
03-Mar-2008	1	First release
18-Mar-2010	2	Figure 2: Safe operating area and Figure 3: Thermal impedance have been changed.

#### Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2010 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

12/12 Doc ID 14509 Rev 2



## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

STMicroelectronics: STS5DNF60L