


Automotive ultrafast recovery - high voltage diode

Datasheet - production data

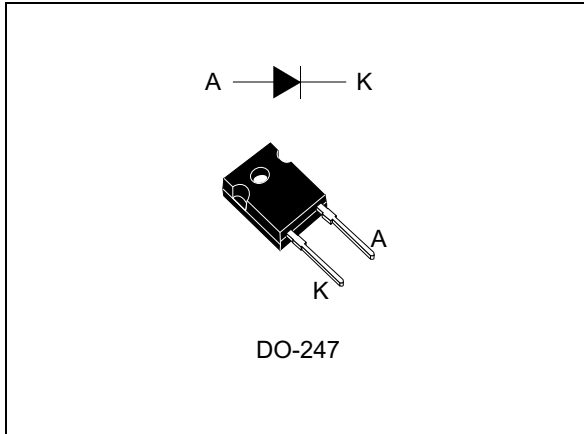

Description

The high quality design of this diode has produced a device with low leakage current, regularly reproducible characteristics and intrinsic ruggedness. These characteristics make it ideal for heavy duty applications that demand long term reliability like automotive applications.

These diodes also fit into auxiliary functions such as snubber, bootstrap, and demagnetization applications.

The improved performance in low leakage current, and therefore thermal runaway guard band, is an immediate competitive advantage for this device.

Features

- AEC-Q101 qualified
- Ultrafast, soft recovery
- Very low conduction and switching losses
- High frequency and/or high pulsed current operation
- High reverse voltage capability
- High junction temperature
- ECOPACK[®]2 compliant component

Table 1. Device summary

| | |
|----------------|--------|
| $I_{F(AV)}$ | 60 A |
| V_{RRM} | 1000 V |
| T_j (max.) | 175 °C |
| V_F (typ) | 1.3 V |
| t_{rr} (typ) | 49 ns |

1 Characteristics

Table 2. Absolute ratings (limiting values at 25 °C, unless otherwise specified)

| Symbol | Parameter | Value | Unit | |
|--------------|--------------------------------------|--|------|---|
| V_{RRM} | Repetitive peak reverse voltage | 1000 | V | |
| $I_{F(RMS)}$ | Forward rms current | 80 | A | |
| $I_{F(AV)}$ | Average forward current | $T_c = 75\text{ °C}, \delta = 0.5$, square wave | 60 | A |
| I_{FRM} | Repetitive peak forward current | $t_p = 5\ \mu\text{s}$, $F = 5\text{ kHz}$ square | 450 | A |
| I_{FSM} | Surge non repetitive forward current | $t_p = 10\text{ ms}$ sinusoidal | 400 | A |
| T_{stg} | Storage temperature range | -65 to + 175 | °C | |
| T_j | Operating junction temperature range | -40 to + 175 | °C | |

Table 3. Thermal parameters

| Symbol | Parameter | Value | Unit |
|---------------|------------------|-------|------|
| $R_{th(j-c)}$ | Junction to case | 0.78 | °C/W |

Table 4. Static electrical characteristics

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit | |
|-------------|-------------------------|-----------------------|---------------------|------|------|---------------|-----|
| $I_R^{(1)}$ | Reverse leakage current | $T_j = 25\text{ °C}$ | $V_R = V_{RRM}$ | - | 20 | μA | |
| | | $T_j = 125\text{ °C}$ | | - | 20 | | 200 |
| $V_F^{(2)}$ | Forward voltage drop | $T_j = 25\text{ °C}$ | $I_F = 60\text{ A}$ | - | 1.4 | 1.8 | V |
| | | $T_j = 100\text{ °C}$ | | - | 1.3 | 1.7 | |
| | | $T_j = 150\text{ °C}$ | | - | 1.3 | 1.7 | |

1. Pulse test: $t_p = 5\text{ ms}$, $\delta < 2\%$

2. Pulse test: $t_p = 380\ \mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses use the following equation:

$$P = 1.3 \times I_{F(AV)} + 0.0067 I_{F(RMS)}^2$$

Table 5. Dynamic characteristics

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|----------|--------------------------|---|------|------|------|------|
| t_{rr} | Reverse recovery time | $I_F = 1\text{ A}$, $di_F/dt = -50\text{ A}/\mu\text{s}$, $V_R = 30\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$ | - | | 115 | ns |
| | | $I_F = 1\text{ A}$, $di_F/dt = -100\text{ A}/\mu\text{s}$, $V_R = 30\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$ | - | 61 | 80 | |
| | | $I_F = 1\text{ A}$, $di_F/dt = -200\text{ A}/\mu\text{s}$, $V_R = 30\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$ | - | 49 | 65 | |
| I_{RM} | Reverse recovery current | $I_F = 60\text{ A}$, $di_F/dt = -200\text{ A}/\mu\text{s}$, $V_R = 600\text{ V}$, $T_j = 125\text{ }^\circ\text{C}$ | - | 31 | 40 | A |
| S | Softness factor | $I_F = 60\text{ A}$, $di_F/dt = -200\text{ A}/\mu\text{s}$, $V_R = 600\text{ V}$, $T_j = 125\text{ }^\circ\text{C}$ | - | 1 | | |
| t_{fr} | Forward recovery time | $I_F = 60\text{ A}$, $di_F/dt = 100\text{ A}/\mu\text{s}$, $V_{FR} = 1.5 \times V_{Fmax}$, $T_j = 25\text{ }^\circ\text{C}$ | - | | 750 | ns |
| V_{FP} | Forward recovery voltage | $I_F = 60\text{ A}$, $di_F/dt = 100\text{ A}/\mu\text{s}$, $T_j = 25\text{ }^\circ\text{C}$ | - | 4 | | V |

Figure 1. Conduction losses versus average current

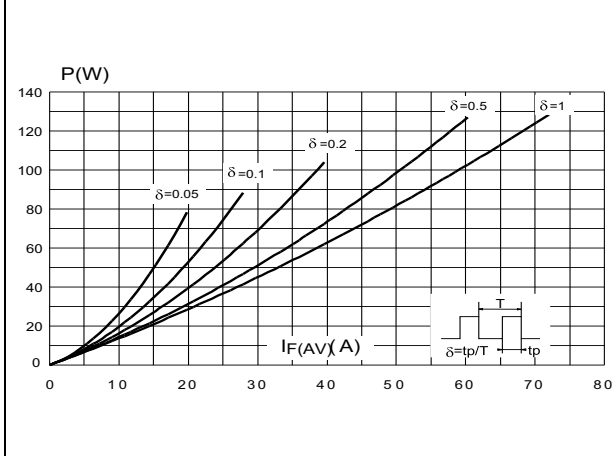


Figure 2. Forward voltage drop versus forward current

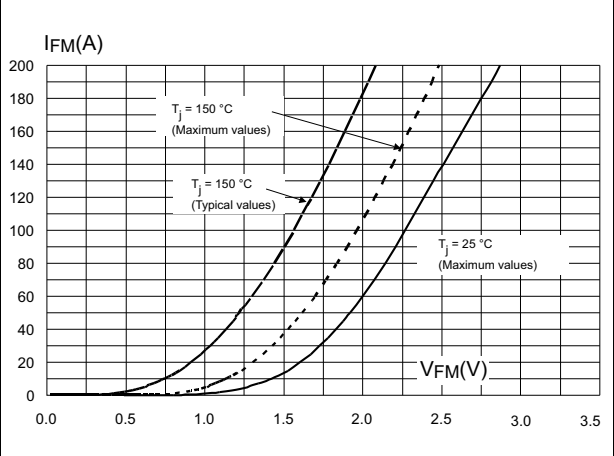


Figure 3. Relative variation of thermal impedance junction to case versus pulse duration

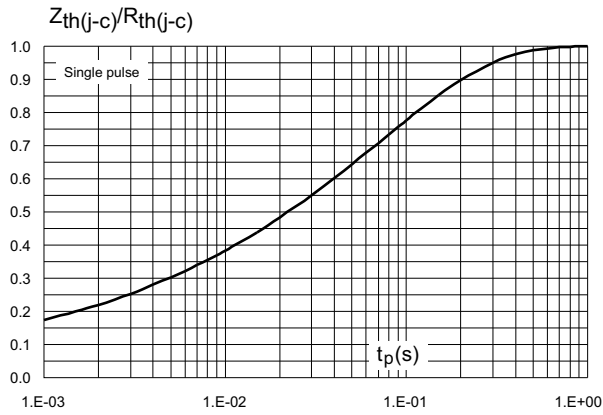


Figure 4. Peak reverse recovery current versus di_F/dt (typical values)

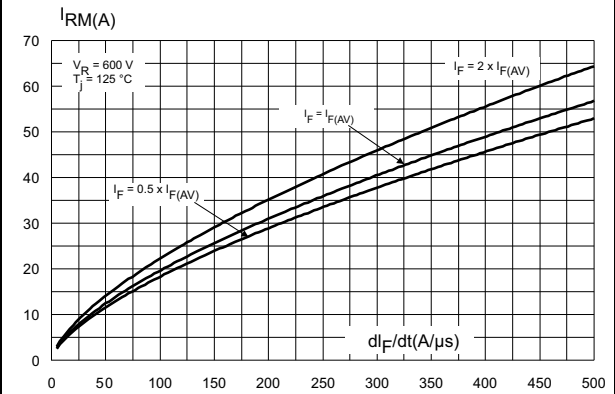


Figure 5. Reverse recovery time versus di_F/dt (typical values)

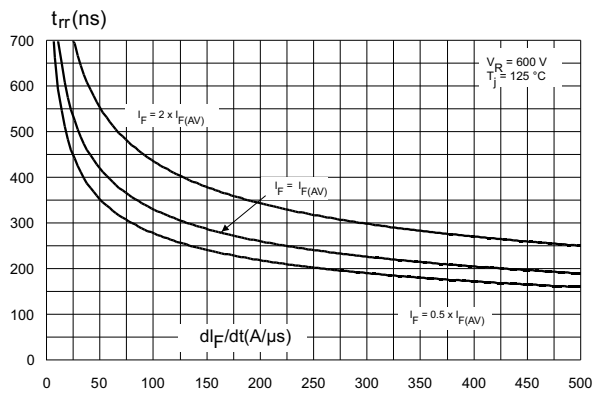


Figure 6. Reverse recovery charges versus di_F/dt (typical values)

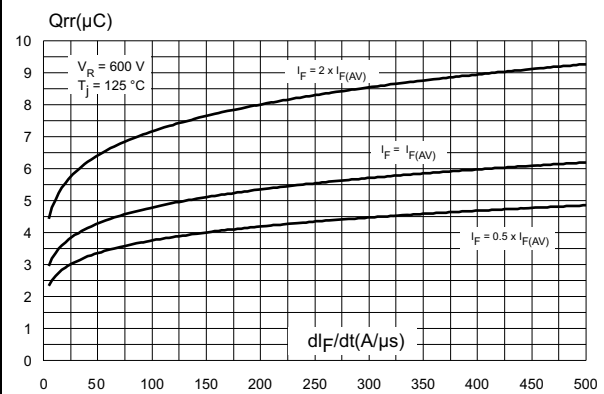


Figure 7. Softness factor versus di_F/dt (typical values)

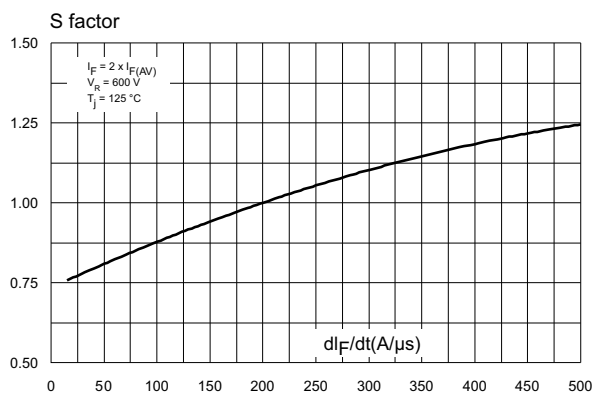


Figure 8. Relative variations of dynamic parameters versus junction temperature

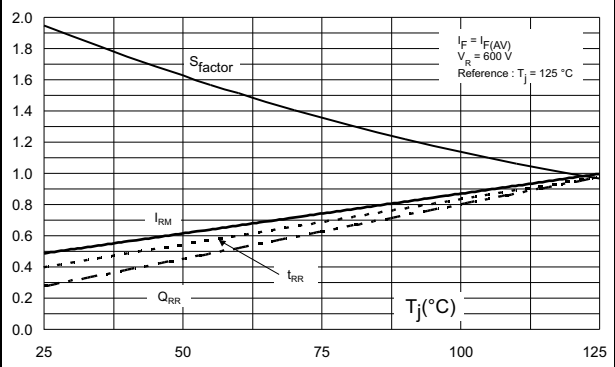


Figure 9. Transient peak forward voltage versus di_F/dt (typical values)

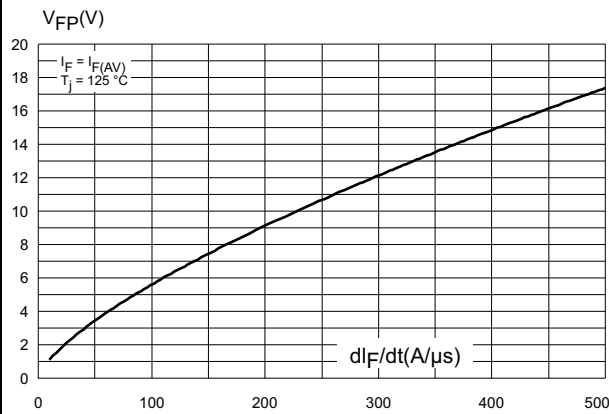


Figure 10. Forward recovery times versus di_F/dt (typical values)

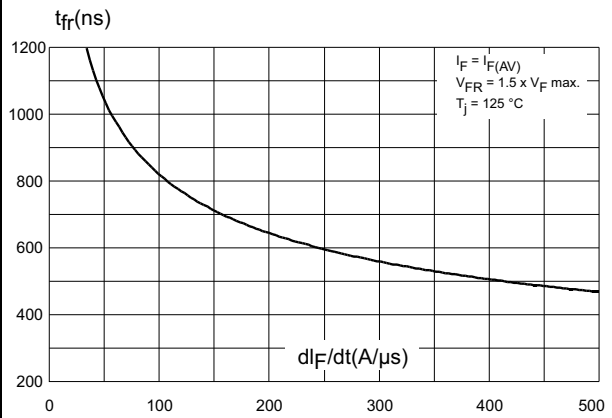


Figure 11. Junction capacitance versus reverse voltage applied (typical values)

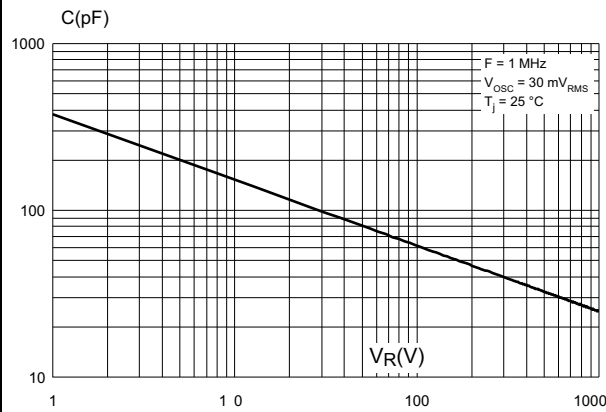


Figure 12. Threshold voltage versus junction temperature


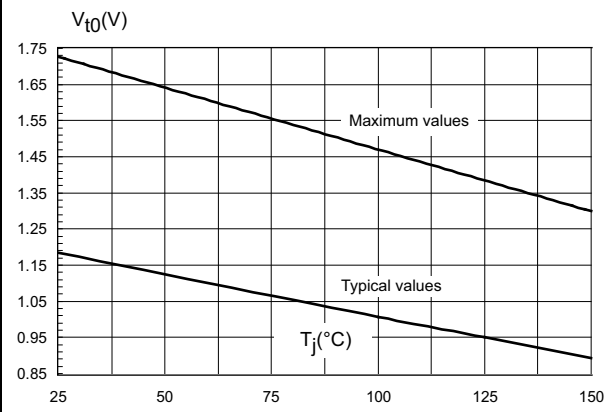


Figure 13. Dynamic resistance versus junction temperature

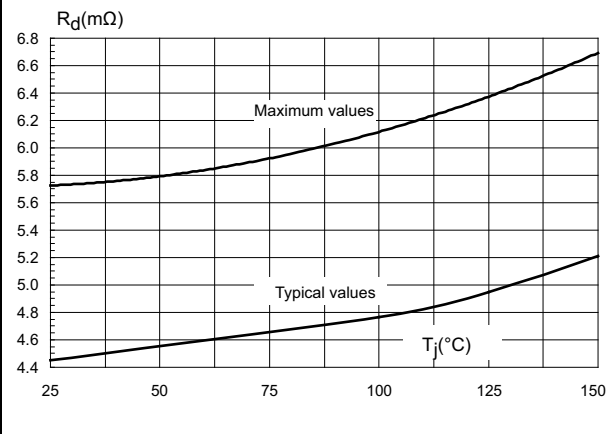

2 Package information

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.80 N·m
- Maximum torque value: 1.0 N·m

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

2.1 DO-247 package information

Figure 14. DO-247 package outline

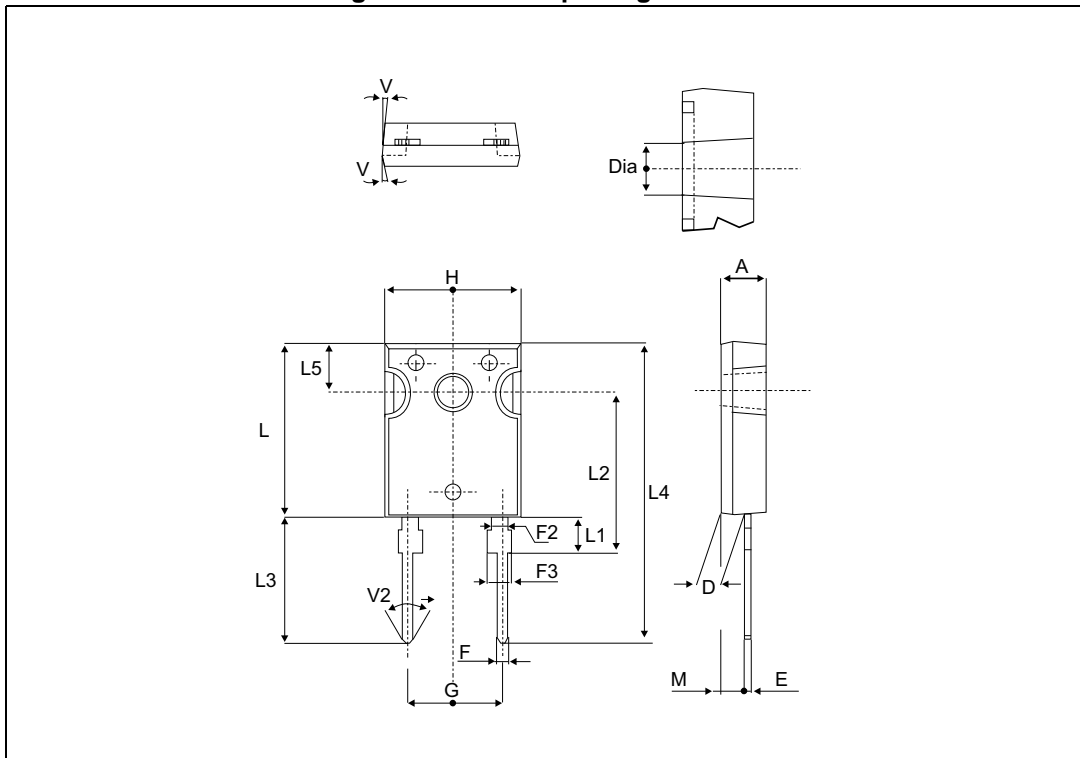


Table 6. DO-247 package mechanical data

| Ref. | Dimensions | | | | | |
|------|-------------|-------|-------|-----------------------|-------|-------|
| | Millimeters | | | Inches ⁽¹⁾ | | |
| | Typ. | Min. | Max. | Typ. | Min. | Max. |
| A | | 4.85 | 5.15 | | 0.191 | 0.203 |
| D | | 2.20 | 2.60 | | 0.086 | 0.102 |
| E | | 0.40 | 0.80 | | 0.015 | 0.031 |
| F | | 1.00 | 1.40 | | 0.039 | 0.055 |
| F2 | 2.00 | | | 0.078 | | |
| F3 | | 2.00 | 2.40 | | 0.078 | 0.094 |
| G | 10.90 | | | 0.429 | | |
| H | | 15.45 | 15.75 | | 0.608 | 0.620 |
| L | | 19.85 | 20.15 | | 0.781 | 0.793 |
| L1 | | 3.70 | 4.30 | | 0.145 | 0.169 |
| L2 | 18.50 | | | 0.728 | | |
| L3 | | 14.20 | 14.80 | | 0.559 | 0.582 |
| L4 | 34.60 | | | 1.362 | | |
| L5 | 5.50 | | | 0.216 | | |
| M | | 2.00 | 3.00 | | 0.078 | 0.118 |
| V | 5° | | | 5° | | |
| V2 | 60° | | | 60° | | |
| Dia. | | 3.55 | 3.65 | | 0.139 | 0.143 |

1. Values in inches are converted from mm and rounded to 4 decimal digits.

3 Ordering information

Table 7. Ordering information

| Order code | Marking | Package | Weight | Base qty. | Delivery mode |
|------------|------------|---------|--------|-----------|---------------|
| STTH6010WY | STTH6010WY | DO-247 | 4.4 g | 30 | Tube |

4 Revision history

Table 8. Document revision history

| Date | Revision | Changes |
|-------------|----------|--|
| 04-Nov-2011 | 1 | Initial release. |
| 22-Apr-2015 | 2 | Added Figure 12 and Figure 13 . Document updated to current standard. |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[STTH6010WY](#)